

Temperature Surveillance Module

Order parts online
www.follettice.com

Quick Set-up Guide

1. Set dip switches (Fig. 1) as needed for your application. Switches are easily moved up or down with a pointed object. A dip switch setting chart is also located on the module above the dip switches.

Feature	Selection	Dip Switch OFF	Dip Switch ON
Recording time	7 days	#3	#3
	24 hr		
°F/C	°F	#4	#4
	°C		
Chart (supplied)	-50° to +50°	#6	#5, #7
	Other chart ranges are available. Consult manual packed with module.		
Alarm speaker	Activated	#8	
	Silent		#8

2. Install 9V battery in compartment behind chart (Fig. 1).
3. Plug in 120V AC adapter.
4. Connect 15 ft temperature probe with stainless tip to back of module. (Fig. 2)

Note: Discard shorter probe.

5. Insert a new -50° to +50° chart (supplied).
6. Remove pen cap and store in cap holder recess at bottom left.
7. Press ON/OFF key (O/I) to turn unit on (Fig. 3). After a brief warm-up, LED will be STEADY GREEN.
8. Press CHART ROTATION key to align proper day/time on chart.

Caution: to avoid damage to the unit, do not manually turn chart hub.

9. Unit will begin to record temperature.
10. Set alarms (Fig. 3):
 - a. Press and hold ALARM key until "A" appears over "MIN" in LCD window display, indicating that you are in alarm setting mode.
 - b. Press PEN HOME key to decrease setting, or press CHART ROTATION key to increase setting.
 - c. Press and hold ALARM key until "MAX" appears under "A" in LCD window display.
 - d. Use same procedure as (b) above to set MAX alarm temperature.
11. Press and hold ALARM key until "A" disappears, indicating that you are now out of the alarm setting mode.

Fig. 1

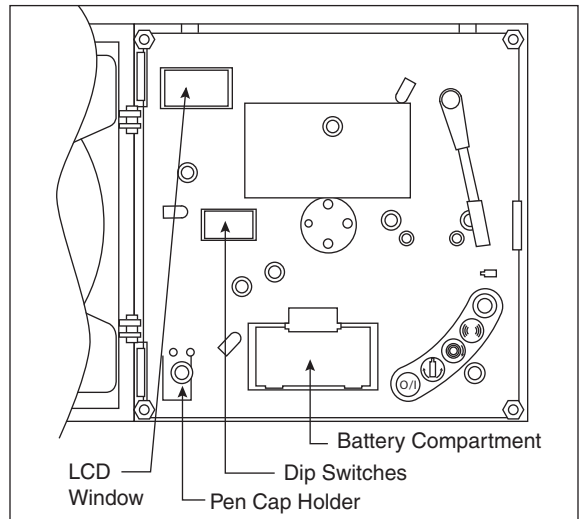


Fig. 2

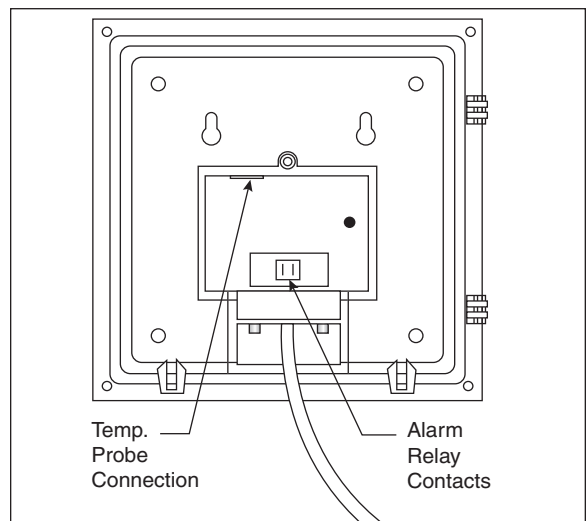


Fig. 3

