



Model E-650-44 shown

Slope front

ice storage bins

Features

Capacities available from 136 - 467 kg (300 - 1000 lb) and widths from 55.9 cm to 132.1 cm (22.00" to 52.00")

Convenient design

- extra large door openings for maximum access
- low sill height allows access to reach bottom of bin
- 55.9 cm (22.00") and 76.2 cm (30.00") bins match with compact ice machines to maximize ice production and storage in small space
- model E-600-42 is 68.6 cm (27.00") deep and will fit through 71.1 cm (28.00") door

Durable construction

- full stainless top, front and sides standard
- heavy-duty welded steel shell and frame support
- poly-lined interior to eliminate corrosion
- rigid, insulated stainless steel lift door with non-staining ABS interior
- fully replaceable gasket seals door opening

Easy installation

- comes assembled, simply screw in legs
- all models will fit through 81.3 cm (32.00") doors (for 58.4 cm (23.00") doors order model E-300-22) or for 71.1 cm (28.00") doors order model E-600-42)

Warranty

- visit follettice.com for complete warranty details
- 3rd party ice machines must be installed and operated in accordance with the manufacturer's instructions

Accessories

- 15.24 cm (6.00") stainless steel legs (item# ABSPECLEGS)
- 20.32 cm (8.00") legs (standard on E-300-22) (item# 00161547)
- Center partition (E-650-44, E-950-48 and E-1025-52 only)
- Additional carts and accessories (refer to form# 3435)



Specification

| | |
|--|---------------------------------|
| Maximum bin capacity | see model table below |
| W1 Width | see model table below |
| D1 Depth at bottom | see model table below |
| D2 Depth at door | 80.0 cm (31.50") |
| D3 Depth with door fully extended | 105.4 cm (41.50") |
| H1 Height (adjustable) | see model table below |
| H2 Bin sill height | see model table below |
| Required door access | see model table below |
| L1 Drain ¹ | 1.00" FPT, center of bin bottom |
| Ice compatibility | all ice types |
| Shipping weight | see model table below |

NOTE: For indoor use only

SHORT FORM SPECIFICATION: Ice storage bin to be Follett model _____. Bin to hold approximately _____ kg (lb) of ice. Construction to be welded steel shell and frame. Exterior finish to be stainless steel front and sides with galvanized steel back and bottom. Bin interior to have non-corroding polyethylene-lined walls and stainless steel bottom. Bin insulation to be non-CFC polyurethane foam, bonded to shell and polyethylene-lined walls for added structural strength. Bin top to be stainless steel and to be custom-cut for specific ice machine(s) to be used. Lift door to have stainless steel exterior and ABS interior, bonded together with non-CFC polyurethane foam for extra rigidity and strength. Bin to have conveniently low door sill height to allow easy access to ice in the bottom of the bin. Door opening to be completely sealed with fully replaceable gasketing. Bin to have 15.24 cm (6.00") legs, adjustable to 17.14 cm (6.75") (model E-300-22 has 20.32 cm (8.00") legs). Bin drain to be 1.00" FPT rigid PVC. NSF listed.

Dimensional drawing

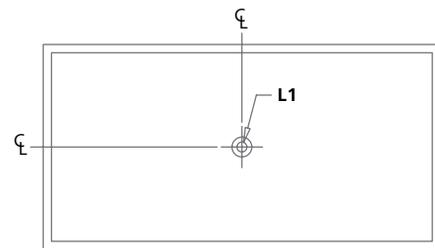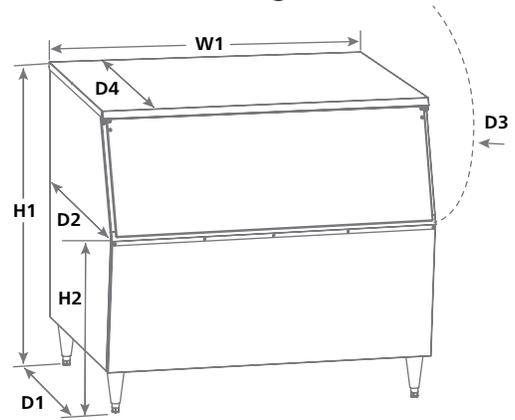

MAESTRO PLUS is a trademark of Follett Products, LLC.
 FOLLETT is a registered trademark of Follett Products, LLC, registered in the US.
 Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

| Model | Maximum bin capacity kg (lb) | Cubic volume m (cu ft) | Width - W1 cm (in) | Depth - D1 cm (in) | Height - H1 cm (in) | Door sill height - H2 cm (in) | Required door access cm (in) | Approximate ship weight kg (lb) |
|-----------------------|---------------------------------|---------------------------|------------------------------|------------------------------|-------------------------------|---|---------------------------------|------------------------------------|
| E-300-22 ² | 136 (300) | 0.27 (9.6) | 55.9 (22.00) | 74.9 (29.50) | 101.6 (40.00) | 66.0 (26.00) | 23.00 (58.4) | 54 (120) |
| E-425-30 | 195 (430) | 0.39 (13.8) | 76.2 (30.00) | 74.9 (29.50) | 101.6 (40.00) | 66.0 (26.00) | 31.00 (78.7) | 65 (144) |
| E-600-42 | 258 (567) | 0.51 (18.1) | 108.7 (42.80) | 68.6 (27.00) | 101.9 (40.10) | 73.9 (29.10) | 28.00 (71.1) | 70 (154) |
| E-650-44 | 299 (660) | 0.59 (20.8) | 111.8 (44.00) | 74.9 (29.50) | 101.6 (40.00) | 66.0 (26.00) | 32.00 (81.2) | 81 (178) |
| E-950-48 | 431 (950) | 0.85 (30.1) | 121.9 (48.00) | 71.8 (28.25) | 127.0 (50.00) | 91.4 (36.00) | 32.00 (81.2) | 94 (207) |
| E-1025-52 | 467 (1030) | 0.92 (32.6) | 132.1 (52.00) | 71.8 (28.25) | 127.0 (50.00) | 91.4 (36.00) | 32.00 (81.2) | 107 (235) |

Notes:

- ¹ Follett recommends installation of a floor drain with grate with all ice storage bins.
- ² Model 300-22 only for use with Follett[®], Maestro Plus[™] 425 series ice machines.

E-Slope front bins

