

FZRADV25 Upright

laboratory freezers



Model configurations			
Hinging	Heated door	Door style	Item number
right	yes	solid	FZRADV25-LB-R005

Features

Powerful refrigeration system with low GWP refrigerant for high performance and reduced total cost of ownership

- exclusive top-mounted modular Complete Refrigeration System (CRS)
- all refrigeration components external to storage compartment for greater usable capacity
- high volume airflow design for faster temperature recovery and uniform temperature
- frost-free and auto-evaporating condensate

Protection for your valuable products

- audible and visual high/low temperature and door open alarms
- dry contacts for remote alarming
- access port for third party monitoring
- key door lock
- rear mounted on/off power switch

Precise temperature control

- microprocessor control with digital temperature display
- factory preset at -25 C (adjustable from -10 C to -25 C)

Laboratory-grade cabinet construction

- full stainless steel interior and exterior provide resistance to rust and corrosion
- internal rounded corners
- heavy-duty dual casters roll easily and lock securely
- 2.36" (5.99 cm) of CARB compliant non-HFC foam throughout
- four (4) epoxy-coated shelves standard, maximum of six (6) shelves per unit

Heavy-duty door for ease of use and energy savings

- 2.60" (6.60 cm) thick insulated stainless steel door with ADA-compliant full length locking handle
- self-closing hinges lock open at 105 degrees for easy product loading

Engineered for sustainability

- R290 low GWP refrigerant
- high density foamed in place insulation (Kyoto Protocol compliant)
- energy-efficient LED lights
- ENERGY STAR® certified
- SNAP compliant
- cULus Listed and UL Energy Verified

Warranty

- 2 years parts and labor

Accessories

Replacement CRS (Complete Refrigeration System) module
(item# 01394444)

Additional shelf (item# 01394030)

NOTE: Maximum of six (6) shelves per unit.

Additional key, includes lock (item# 01394329)

NOTE: Accessories ship separately.

Specification

Nominal capacity	24.7 cu ft (699 L)
Ventilation clearance	15.00" (38.1 cm) top, 2.00" (5.08 cm) back

Exterior

W1 Width	28.35" (72.0 cm)
D1 Depth with handle	31.50" (80.0 cm)
H1 Height with casters	79.31" (201.4 cm)
Casters	(4) swiveling dual wheel casters (2) with toe locks
D2 Door swing	55.91" (142.0 cm)
Wall bracket, seismic anchoring	standard, factory installed

Interior

Height	59.84" (152.0 cm)
Lighting	(1) LED light from top of cabinet
Storage system	(4) full, epoxy-coated shelves, maximum of (6) shelves per unit
Shelf dimensions	20.87" W x 25.59" D (53.0 x 65.0 cm)
Max. load rating per shelf	100 lb (45 kg)

Door configurations

Door	stainless steel (non-field reversible)
Door lock	cylinder type with one key
Door handle	ADA-compliant, full length handle
Door hinges	torsion rod self-closing with 105° hold open feature
Gasket	magnetic dart style (replaceable)

Electrical

C1 Electrical 115 V/60/1 (103 - 132 V)	5.2 run load amps, hospital-grade NEMA 5-15P, 118" (3.0 m) cord
Maximum size of branch circuit overcurrent device	15 amps dedicated circuit


Controls

Temperature display	standard 3 digit, 7 segment LED
C2 3rd party probe access	soft access port on left side of cabinet
Temperature probe calibration	top probe calibration in 0.1° increments
Refrigeration and defrost probes	NTC thermistor type (± 1.0 C, ± 1.8 F)
Programmable operating range	-10 to -25 C (14 to -13 F)
Factory preset	-25 C

Alarming

High and low product temperature alarm	audible and visual (preprogrammed)
Door ajar alarm	audible and visual
Probe error alarm	audible and visual
Alarm mute	with press of key
Remote contacts	NO/NC standard, located on back of unit

Dimensional drawing

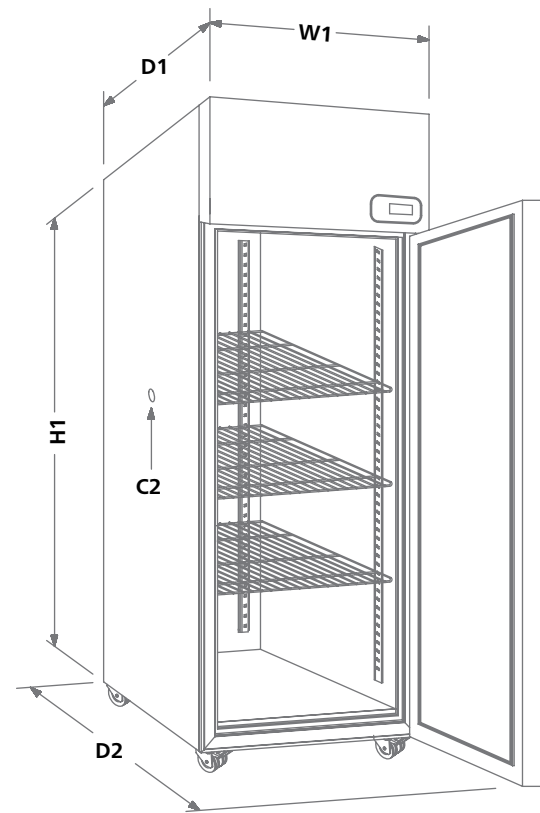

C1



ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. FOLLETT and FOLLETT HEALTHCARE are registered trademarks of Follett Products, LLC, registered in the US. Follett reserves the right to change specifications at any time without obligation.

System performance

Refrigeration system	integral top-mounted module with 1/2 hp compressor and air-cooled condenser
Refrigerant and charge	Low GWP R290 refrigerant, 3.9 oz
Air circulation system	evaporator with air-forced ventilation
Energy consumption	5.22 kWh/day (auto-off defrost)

Shipping

Shipping size 30.25" W x 34.50" D x 86.38" H
(76.8 x 87.6 x 219.4 cm)

Approximate refrigeration module net weight 71 lb (32 kg)

Approximate net weight 287 lb (130 kg)

Approximate ship weight 353 lb (160 kg)

NOTE: For indoor use only

SHORT FORM SPECIFICATION: ENERGY STAR certified 25 cu ft (699 L) upright -25C freezer with (4) adjustable epoxy-coated wire shelves. Low GWP R290 refrigeration system includes an integral top-mounted module with 1/2 hp compressor and air-cooled condenser. Microprocessor control with digital display in degrees C. High density foamed in place insulation (Kyoto Protocol compliant). Full suite of audible and visual alarms. 118" (3.0 m) power cord with NEMA 5-15P hospital-grade plug.

FZRADV25 upright laboratory freezers

