







| 2023

effective 01/01/23
revised 12/12/23



- medical-grade refrigerators 
- medical-grade freezers 
- ice and water dispensers 
- ice machines 
- slope front bins 

Contents

TERMS AND POLICIES	5
MEDICAL-GRADE REFRIGERATORS AND FREEZERS	6
Follett authorized installation services ¹	7
COUNTERTOP REFRIGERATORS	8
REF1 and REF2 countertop refrigerators	8
REFVAC2 countertop NSF 456 certified vaccine refrigerators	8
UNDERCOUNTER REFRIGERATORS	9
REF4P and REF5P Performance Plus undercounter refrigerators	9
REF4P and REF5P Performance Plus undercounter refrigerators with Wi-Fi remote monitoring	10
REFOMN4P and REFOMN5P Performance Plus Omnicell FlexLock-ready undercounter refrigerators	10
REFVAC4P and REFVAC5P Performance Plus undercounter NSF 456 certified vaccine refrigerators	10
REF5BBP-T Performance Plus undercounter blood bank refrigerators	11
REFNAT5 Edge Series undercounter refrigerators	11
REFADV5-SD Follett Advantage undercounter refrigerator	11
REF3-VAC undercounter refrigerator	11
INFINITY SERIES™ UPRIGHT REFRIGERATORS, VARIABLE SPEED	12
REF12i, REF20i, REF25i single door upright refrigerators	12
REF12i, REF20i, REF25i with Wi-Fi remote monitoring single door upright refrigerators	14
REF20i and REF25i Omnicell FlexLock-ready single door upright refrigerators	15
REF20i-BB and REF25i-BB blood bank single door upright refrigerators	16
UPRIGHT REFRIGERATORS, FIXED SPEED	17
REF12-LB, REF20-LB/PH and REF25-LB/PH single door upright refrigerators for laboratory and pharmacy	17
REF20-LB/PH and REF25-LB/PH single door upright refrigerators with Wi-Fi remote monitoring	18
REF20-LB/PH and REF25-LB/PH Omnicell FlexLock-ready single door upright refrigerators	18
REFVAC20 and REFVAC25 single door upright NSF 456 certified vaccine refrigerators	19
REF20-BB and REF25-BB single door upright refrigerators for blood banks	19
UPRIGHT REFRIGERATORS, FIXED SPEED	20
REF45-LB/PH double door upright refrigerators for laboratory and pharmacy	20
REFVAC45 double door upright NSF 456 certified vaccine refrigerators	21
REF45-BB double door upright refrigerators for blood banks	21
COUNTERTOP FREEZERS	22
FZR1 and FZR2 countertop freezers	22
FZRVAC2 countertop NSF 456 certified vaccine freezers	22
UNDERCOUNTER FREEZERS	23
FZR4P and FZR5P Performance Plus undercounter freezers	23
FZRVAC4P and FZRVAC5P Performance Plus undercounter NSF 456 certified vaccine freezers	24
FZR5PLP-T Performance Plus undercounter plasma freezer	24
FZRNAT5 Edge Series undercounter freezer	24
UPRIGHT FREEZERS	25
FZR20-LB and FZR25-LB single door upright freezers for laboratory and pharmacy	25
FZRVAC20-LB and FZRVAC25-LB single door upright NSF 456 certified vaccine freezers	25
FZRMD24 -30 C single door upright freezer for laboratory	26
FZR20 and FZR25 single door upright freezers for plasma	26
FZR8-PC plasma chiller	26
FZRDCMD17 dual chamber biomedical ECO upright freezer	27
COMBINATION REFRIGERATOR/FREEZER	28
REFFZR9 pharmaceutical combination refrigerator and freezer	28
REFFZR16 pharmaceutical combination refrigerator and freezer	28

REFZR21 pharmaceutical combination refrigerator and freezer	28
ULTRA-LOW CHEST FREEZERS	29
FZRC3-80 C ultra-low temperature chest freezer	29
FZRC25-86 C ultra-low temperature chest freezer.....	29
ULTRA-LOW UPRIGHT FREEZERS	30
FZR19 -86 C ultra-low temperature VIP ECO upright freezer	30
FZR26 -86 C ultra-low temperature VIP ECO upright freezer	30
FZR29 -86 C ultra-low temperature VIP ECO upright freezer	30
FZRDR13 -86 C ultra-low temperature TwinGuard upright freezer.....	31
FZRDR19 -86 C ultra-low temperature TwinGuard upright freezer.....	31
FZRDR26 -86 C ultra-low temperature TwinGuard upright freezer.....	31
CRYOGENIC FREEZERS AND CO2 INCUBATORS	32
FZRC8 -150 C cryogenic chest freezer	32
CO2INC30 Reach-In CO2 incubator	32
REFRIGERATOR AND FREEZER ACCESSORIES	33
Countertop refrigerator and freezer accessories and warranties	33
Undercounter refrigerator and freezer accessories and warranties	33
Upright refrigerator and freezer accessories and warranties	34
ICE AND WATER DISPENSERS.....	35
Symphony Plus ice and water dispensers – 12 series	36
Symphony Plus ice-only dispensers – 12 series	36
Symphony Plus ice and water dispensers with removable ice machine – 25 and 50 series	37
Symphony Plus series ice-only dispensers – 25 and 50 series	38
Symphony Plus ice and water dispensers with removable ice machine – 110 series	39
Symphony Plus manual load ice and water dispensers – 110 series	39
Symphony Plus ice-only dispensers – 110 series	40
Symphony Plus base stand options	40
ICE AND WATER DISPENSER ACCESSORIES	41
Water treatment accessories for Symphony Plus ice and water dispensers	41
Cleaning and sanitizing accessories for Symphony Plus ice and water dispensers.....	41
Other accessories for Symphony Plus ice and water dispensers.....	41
Replacement ice machine for use in existing Symphony and Symphony Plus dispensers	42
Replacement ice machine ordering matrix.....	42
ICE MACHINES	43
Maestro Plus ice machine bins – 400 series	44
Maestro Plus flake ice machines for ice storage bins – 400 series	45
Maestro Plus Chewblet ice machines for ice storage bins – 400 series.....	46
Maestro Plus Chewblet ice machines for countertop ice and beverage dispensers – 400 series	47
Top kits for top mount model Maestro Plus 400 series ice machines used with countertop ice and beverage dispensers	48
Top kits for RIDE model Maestro Plus and Horizon Elite series ice machines for use with countertop ice and beverage dispensers	48
Horizon Elite Chewblet ice machines for ice storage bins – 710 series.....	49
Horizon Elite Chewblet ice machines for countertop ice and beverage dispensers – 710 series	49
Top kits for Horizon Elite 710 RIDE ice machines for use with countertop ice and beverage dispensers....	50
Ice transport tube	50
Top kits for Horizon Elite 710 series ice machines for use with countertop ice and beverage dispensers ...	51
ICE MACHINE ACCESSORIES.....	52
Water treatment accessories for ice machines	52
Other accessories for ice machines.....	52

ICE STORAGE, ICE TRANSPORT AND ICE HANDLING 53
Slope front bins 53
Replacement stainless steel tops for slope front bins 53
Slope front bins 54
Replacement stainless steel tops for slope front bins 54

Terms and policies

Terms

- Products for sale meet all regulatory compliances as noted in the appropriate Follett Product Specification Sheet at the time of sale. Customer understands and accepts these products as meeting the designated regulatory compliances.
- Net 30 day terms on approved accounts
- Prices subject to change without notice
- Specifications subject to change without notice
- This price list supersedes all others
- **Pricing is in USD**
- **Products priced with EX Works (EXW) terms**
- **Other shipping terms available upon request**

Return Policy

Non-standard equipment cannot be returned. Orders for non-standard equipment cannot be cancelled.

Follett equipment may be returned for credit under the following conditions:

- The equipment is new and unused
- A return authorization number has been issued by customer service within 45 days after shipment
- Follett receives the equipment at the factory in Easton, PA within 30 days after issuance of the return authorization number
- The equipment must be returned in Follett packaging. If the packaging has been damaged or discarded, Follett will forward new packaging at the customer's expense.

Note: Return freight charges are the responsibility of the customer. If equipment is returned and is damaged because of improper packaging, Follett Products, LLC will not be held responsible.

Credit will be issued when the equipment has been inspected by Follett and deemed suitable to be returned to stock.

Note: A 20% restocking charge will be deducted from the credit. If the cost to return the product to stock exceeds 20%, the actual cost will be deducted.

Medical-grade refrigerators and freezers

Follett medical-grade refrigerators and freezers provide the consistent, stable temperatures and access security required for patient floor, lab and pharmacy applications. Heavy-duty compressors and powerful forced-air cooling provide exceptional temperature consistency, quick temperature pull down and rapid recovery following door openings.

Warranty

PHCbi co-branded models

Please visit <https://www.phchd.com/global/biomedical>.

Follett medical-grade countertop, undercounter (Performance Plus and Edge Series™) and upright refrigerators and freezers (including Infinity Series™)

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 2 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 2 year period are covered under this warranty.

The compressor shall be covered for an additional 3 years (parts only), for a total of 5 years from the date of installation.

Follett Advantage® undercounter refrigerators

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 1 year from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 1 year period are covered under this warranty.

FOLLETT WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond the control of Follett are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective upon examination.
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.

This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship.

Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.

Follett authorized installation services¹

Authorized installation


Equipment is shipped via Follett logistics partner, delivered to customer's facility, and positioned in final customer-designated location by certified technicians. Certified Follett technician will remove and discard all packaging material, install casters, make all electrical connections, and complete set up to ensure the unit is fully operational and ready to be used by customer.

For additional product information and terms and conditions, request form# 8620.


¹ Authorized services available only with Follett contracted logistics provider and does not include dock-to-dock common carrier freight charges.

Countertop and undercounter refrigerators and freezers

Item number	Description	Net price
AS1	Authorized installation, first unit	\$350
	Authorized installation, subsequent units of the same model to the same location	\$175



Countertop



Undercounter

Single door upright refrigerators and freezers


Item number	Description	Net price
AS2	Authorized installation, first unit	\$500
	Authorized installation, subsequent units of the same model to the same location	\$250



Single door upright


Double door upright refrigerators

Item number	Description	Net price
AS3	Authorized installation, first unit	\$800
	Authorized installation, subsequent units of the same model to the same location	\$375

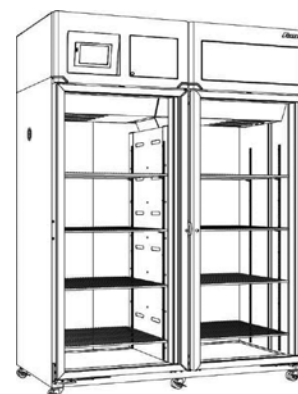


Double door upright

Countertop refrigerators



REF1



REF2/REFVAC2

REF1 and REF2 countertop refrigerators

Medical-grade forced air countertop refrigerators with external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.

For additional product information, request form# 6555 for REF1 or 6560 for REF2.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Front access condensate pan	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF1	1.0 (28)	right	no	no	18.60 (47.2)	24.00 (61.0)	17.93 (45.5)	109 (50)	\$4,330
REF1-KP	1.0 (28)	right	yes	no	18.60 (47.2)	24.00 (61.0)	17.93 (45.5)	109 (50)	\$5,105
REF1-PR	1.0 (28)	right	no	yes	18.60 (47.2)	24.00 (61.0)	17.93 (45.5)	109 (50)	\$4,480
REF2	1.8 (51)	right	no	no	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	132 (60)	\$4,610
REF2-KP	1.8 (51)	right	yes	no	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	132 (60)	\$5,385
REF2-PR	1.8 (51)	right	no	yes	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	132 (60)	\$4,760

REFVAC2 countertop NSF 456 certified vaccine refrigerators


Medical-grade NSF 456 certified refrigerators for vaccine storage. Forced air countertop refrigerators with external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.

For additional product information, request form# 9060.


See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Front access condensate pan	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REFVAC2	1.8 (51)	right	no	no	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	132 (60)	\$4,835


Undercounter refrigerators




Performance Plus
LED display




Performance Plus
7" LCD touchscreen display



REF3-VAC



Edge Series



Follett Advantage

REF4P and REF5P Performance Plus undercounter refrigerators

Medical-grade, undercounter refrigerators, freestanding or stackable, with external temperature display in F or C, integral high/low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REF4P fits below 34.00" (86.4cm) ADA-compatible counter and model REF5P fits below a standard 36.00" (91.4 cm) high counter. Ideal for heavy duty applications.

For additional product information, request form# 6455 for REF4P, 6460 for REF5P, 6505 for REF4P-T, or 6510 for REF5P-T.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
LED digital temperature display									
REF4P-OR-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$5,410
REF5P-OR-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$5,410
REF4P-OR-00-GD	3.9 (110)	right	no	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$5,960
REF5P-OR-00-GD	4.5 (127)	right	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$5,960
REF4P-OR-KP-00	3.9 (110)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,185
REF5P-OR-KP-00	4.5 (127)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,185
REF4P-OR-KP-GD	3.9 (110)	right	yes	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,735
REF5P-OR-KP-GD	4.5 (127)	right	yes	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,735
REF4P-OL-00-00	3.9 (110)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$5,410
REF5P-OL-00-00	4.5 (127)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$5,410
REF4P-OL-00-GD	3.9 (110)	left	no	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$5,960
REF5P-OL-00-GD	4.5 (127)	left	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$5,960
REF4P-OL-KP-00	3.9 (110)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,185
REF5P-OL-KP-00	4.5 (127)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,185
REF4P-OL-KP-GD	3.9 (110)	left	yes	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,735
REF5P-OL-KP-GD	4.5 (127)	left	yes	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,735
7" LCD touchscreen digital temperature display									
REF4P-TR-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,905
REF5P-TR-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,905
REF4P-TR-00-GD	3.9 (110)	right	no	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,455
REF5P-TR-00-GD	4.5 (127)	right	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,455
REF4P-TR-KP-00	3.9 (110)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,355
REF5P-TR-KP-00	4.5 (127)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,355
REF4P-TR-KP-GD	3.9 (110)	right	yes	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,905
REF5P-TR-KP-GD	4.5 (127)	right	yes	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,905
REF4P-TL-00-00	3.9 (110)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$6,905
REF5P-TL-00-00	4.5 (127)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$6,905
REF4P-TL-00-GD	3.9 (110)	left	no	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,455
REF5P-TL-00-GD	4.5 (127)	left	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,455
REF4P-TL-KP-00	3.9 (110)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,355
REF5P-TL-KP-00	4.5 (127)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,355
REF4P-TL-KP-GD	3.9 (110)	left	yes	glass	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,905
REF5P-TL-KP-GD	4.5 (127)	left	yes	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,905

REF4P and REF5P Performance Plus undercounter refrigerators with Wi-Fi remote monitoring

Medical-grade, undercounter refrigerators with Wi-Fi based cloud communication functionality for continuous temperature monitoring and remote alarming. Freestanding or stackable with LED control, integral high/low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REF4P fits below 34.00" (86.4 cm) ADA-compatible counter and model REF5P fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order. Ideal for heavy duty applications.

For additional product information, request form# 9020.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
LED digital temperature display									
REF4P-0R-00-00-N	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	Contact factory
REF5P-0R-00-00-N	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	Contact factory
REF4P-0L-00-00-N	3.9 (110)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	Contact factory
REF5P-0L-00-00-N	4.5 (127)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	Contact factory

REFOMN4P and REFOMN5P Performance Plus Omnicell FlexLock-ready undercounter refrigerators

Medical-grade, undercounter refrigerators with pre-drilled holes for installing Omnicell® XT FlexLock Refrigerator Lock and Temperature Monitor (not included). LED control or LCD touchscreen display, integral high/low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REFOMN4P fits below 34.00" (86.4 cm) ADA-compatible counter and model REFOMN5P fits below a standard 36.00" (91.4 cm) high counter. Ideal for heavy duty applications.

For additional product information, request form# 8970.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
LED digital temperature display									
REFOMN4P-0R-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	Contact factory
REFOMN5P-0R-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	Contact factory
7" LCD touchscreen digital temperature display									
REFOMN4P-TR-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	Contact factory
REFOMN5P-TR-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	Contact factory

REFVAC4P and REFVAC5P Performance Plus undercounter NSF 456 certified vaccine refrigerators

Medical-grade NSF/ANSI 456 certified undercounter refrigerators for vaccine storage. Freestanding or stackable, with external temperature display in F or C, integral high/low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REFVAC4P fits below 34.00" (86.4 cm) ADA-compatible counter and model REFVAC5P fits below a standard 36.00" (91.4 cm) high counter. Ideal for heavy duty applications.

For additional product information, request form# 9055.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
LED digital temperature display									
REFVAC4P-0R-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$5,635
REFVAC5P-0R-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$5,635
7" LCD touchscreen digital temperature display									
REFVAC4P-TR-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$7,130
REFVAC5P-TR-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$7,130

REF5BBP-T Performance Plus undercounter blood bank refrigerators

Medical-grade, undercounter blood bank refrigerators, freestanding or stackable, with 7" LCD touchscreen user interface with integral data and event logging. Stainless steel construction on interior/exterior with internal LED lighting. 115V/60/1 electrical. For undercounter applications: fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order. Two full extension, stainless drawers standard. Includes separate temperature surveillance module with audible/visual alarm, 7-day chart recorder and digital product temperature display. Meets AABB, FDA, ARC requirements for storage of blood products at 4 C. Ideal for heavy duty applications.

For additional product information, request form# 6475.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Bags (450 ml)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF5BBP-TR-00-00	4.5 (127)	60	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,380
REF5BBP-TR-00-GD	4.5 (127)	60	right	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,930
REF5BBP-TR-KP-00	4.5 (127)	60	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,830
REF5BBP-TR-KP-GD	4.5 (127)	60	right	yes	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$11,380
REF5BBP-TL-00-00	4.5 (127)	60	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,380
REF5BBP-TL-00-GD	4.5 (127)	60	left	no	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,930
REF5BBP-TL-KP-00	4.5 (127)	60	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,830
REF5BBP-TL-KP-GD	4.5 (127)	60	left	yes	glass	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$11,380

REFNAT5 Edge Series undercounter refrigerators

Medical-grade undercounter refrigerators with LED control, right-hinged door available in solid steel or dual-pane glass and electro galvanized steel, painted steel exterior, preset automatic alarm tracking around set point, 3 coated steel wire shelves, variable speed compressor, R600a natural refrigerant. 115V/60/1 electrical. Fits below standard 36.00" (91.4 cm) counter. Ideal for medium to heavy duty applications.

For additional product information, request form# 9045.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door styl	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	Net price
REFNAT5-SD	5.0 (142 L)	right	no	steel	23.84 (60.6)	24.50" (62.2)	34.10 (86.6)	130 (59)	\$1,779
REFNAT5-GD	5.0 (142 L)	right	no	glass	23.84 (60.6)	24.50" (62.2)	34.10 (86.6)	136 (62)	\$1,999

REFADV5-SD Follett Advantage undercounter refrigerator

Medical-grade undercounter refrigerator with LED control, right-hinged painted steel door, audible and visual high/low temperature alarms, 2 adjustable wire shelves. 115V/60/1 electrical. Fits below 34.00" (86.4 cm) ADA-compatible counter. Ideal for light to medium duty applications.

For additional product information, request form# 8455.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	Net price
REFADV5-SD	4.7 (132 L)	right	no	painted steel	23.30 (59.2)	25.40 (64.5)	31.93 (81.1)	120 (54)	\$899

REF3-VAC undercounter refrigerator

PHCbI brand high performance undercounter vaccine refrigerator, 3.0 cu ft capacity, +2 C to +8 C temperature range, glass door, 2 adjustable shelves, microprocessor controller with touchpad display. High/low temperature, power failure and door alarming. 115/60 electrical
ADA compliant. ENERGY STAR® certified.


For additional product information, request form# 12603.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	Net price
REF3-VAC	3.0 (85)	right	no	glass	22.50 (57.2)	22.10 (56.2)	29.60 (75.1)	120 (54)	\$1,812

Infinity Series™ upright refrigerators, variable speed



Shelves

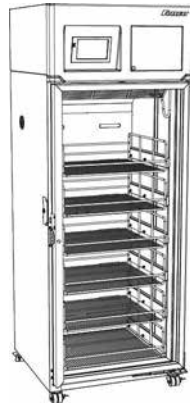

Baskets



Drawers



Blood Banks

REF12i, REF20i, REF25i single door upright refrigerators

Infinity Series upright refrigerator with variable capacity compressor, LCD touchscreen user interface, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, user-programmable temperature display and integral alarming functions, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Interchangeable storage options allow the interior cabinet space to be configured with shelves, baskets or drawers to your exact needs. Certified to meet NSF/ANSI 456 standard for vaccine storage.

For additional product information, request form# 1027.

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Vaccine storage capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF12i-4S-R00G	12.0 (340)	7.2 (204)	4 shelves	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-R0000G	19.7 (558)	12.7 (360)	4 shelves	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-R0000G	24.6 (697)	16.8 (476)	4 shelves	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-4S-R00S	12.0 (340)	7.2 (204)	4 shelves	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-R0000S	19.7 (558)	12.7 (360)	4 shelves	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-R0000S	24.6 (697)	16.8 (476)	4 shelves	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-4S-R00KPG	19.7 (558)	12.7 (360)	4 shelves	right	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-R00KPG	24.6 (697)	16.8 (476)	4 shelves	right	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-4S-R00KPS	19.7 (558)	12.7 (360)	4 shelves	right	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-R00KPS	24.6 (697)	16.8 (476)	4 shelves	right	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-4S-RHT00G	19.7 (558)	12.7 (360)	4 shelves	right	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-RHT00G	24.6 (697)	16.8 (476)	4 shelves	right	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-4S-RHTKPG	19.7 (558)	12.7 (360)	4 shelves	right	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-RHTKPG	24.6 (697)	16.8 (476)	4 shelves	right	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-4S-L00G	12.0 (340)	7.2 (204)	4 shelves	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-L0000G	19.7 (558)	12.7 (360)	4 shelves	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-L0000G	24.6 (697)	16.8 (476)	4 shelves	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-4S-L00S	12.0 (340)	7.2 (204)	4 shelves	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-L0000S	19.7 (558)	12.7 (360)	4 shelves	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-L0000S	24.6 (697)	16.8 (476)	4 shelves	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-4S-L00KPG	19.7 (558)	12.7 (360)	4 shelves	left	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-L00KPG	24.6 (697)	16.8 (476)	4 shelves	left	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-4S-L00KPS	19.7 (558)	12.7 (360)	4 shelves	left	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-L00KPS	24.6 (697)	16.8 (476)	4 shelves	left	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-4S-LHT00G	19.7 (558)	12.7 (360)	4 shelves	left	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-LHT00G	24.6 (697)	16.8 (476)	4 shelves	left	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-4S-LHTKPG	19.7 (558)	12.7 (360)	4 shelves	left	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-LHTKPG	24.6 (697)	16.8 (476)	4 shelves	left	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory

Item number	Cubic capacity cu ft (L)	Vaccine storage capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF12i-5B-R00G	12.0 (340)	7.6 (215)	5 baskets	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-R0000G	19.7 (558)	12.8 (362)	6 baskets	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-R0000G	24.6 (697)	16.4 (464)	6 baskets	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5B-R00S	12.0 (340)	7.6 (215)	5 baskets	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-R0000S	19.7 (558)	12.8 (362)	6 baskets	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-R0000S	24.6 (697)	16.4 (464)	6 baskets	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-6B-R00KPG	19.7 (558)	12.8 (362)	6 baskets	right	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-R00KPG	24.6 (697)	16.4 (464)	6 baskets	right	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-6B-R00KPS	19.7 (558)	12.8 (362)	6 baskets	right	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-R00KPS	24.6 (697)	16.4 (464)	6 baskets	right	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-6B-RHT00G	19.7 (558)	12.8 (362)	6 baskets	right	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-RHT00G	24.6 (697)	16.4 (464)	6 baskets	right	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-6B-RHTKPG	19.7 (558)	12.8 (362)	6 baskets	right	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-RHTKPG	24.6 (697)	16.4 (464)	6 baskets	right	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5B-L00G	12.0 (340)	7.6 (215)	5 baskets	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-L0000G	19.7 (558)	12.8 (362)	6 baskets	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-L0000G	24.6 (697)	16.4 (464)	6 baskets	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5B-L00S	12.0 (340)	7.6 (215)	5 baskets	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-L0000S	19.7 (558)	12.8 (362)	6 baskets	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-L0000S	24.6 (697)	16.4 (464)	6 baskets	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-6B-L00KPG	19.7 (558)	12.8 (362)	6 baskets	left	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-L00KPG	24.6 (697)	16.4 (464)	6 baskets	left	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-6B-L00KPS	19.7 (558)	12.8 (362)	6 baskets	left	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-L00KPS	24.6 (697)	16.4 (464)	6 baskets	left	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-6B-LHT00G	19.7 (558)	12.8 (362)	6 baskets	left	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-LHT00G	24.6 (697)	16.4 (464)	6 baskets	left	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-6B-LHTKPG	19.7 (558)	12.8 (362)	6 baskets	left	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-LHTKPG	24.6 (697)	16.4 (464)	6 baskets	left	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5D-R00G	12.0 (340)	7.5 (212)	5 drawers	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6D-R0000G	19.7 (558)	13.8 (391)	6 drawers	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6D-R0000G	24.6 (697)	18.2 (515)	6 drawers	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5D-R00S	12.0 (340)	7.5 (212)	5 drawers	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6D-R0000S	19.7 (558)	13.8 (391)	6 drawers	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6D-R0000S	24.6 (697)	18.2 (515)	6 drawers	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5D-L00G	12.0 (340)	7.5 (212)	5 drawers	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6D-L0000G	19.7 (558)	13.8 (391)	6 drawers	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6D-L0000G	24.6 (697)	18.2 (515)	6 drawers	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5D-L00S	12.0 (340)	7.5 (212)	5 drawers	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6D-L0000S	19.7 (558)	13.8 (391)	6 drawers	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6D-L0000S	24.6 (697)	18.2 (515)	6 drawers	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory

REF12i, REF20i, REF25i with Wi-Fi remote monitoring single door upright refrigerators

Infinity Series upright refrigerators with variable capacity compressor, Wi-Fi based cloud communication functionality, LCD touchscreen user interface, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, user-programmable temperature display and integral alarming functions, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Interchangeable storage options allow the interior cabinet space to be configured with shelves, baskets or drawers to your exact needs. Certified to meet NSF/ANSI 456 standard for vaccine storage.

For additional product information, request form# 1027.

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Vaccine storage capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF12i-4S-R00GN	12.0 (340)	7.2 (204)	4 shelves	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-R0000GN	19.7 (558)	12.7 (360)	4 shelves	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-R0000GN	24.6 (697)	16.8 (476)	4 shelves	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-4S-R00SN	12.0 (340)	7.2 (204)	4 shelves	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-R0000SN	19.7 (558)	12.7 (360)	4 shelves	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-R0000SN	24.6 (697)	16.8 (476)	4 shelves	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-4S-L00GN	12.0 (340)	7.2 (204)	4 shelves	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-L0000GN	19.7 (558)	12.7 (360)	4 shelves	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-L0000GN	24.6 (697)	16.8 (476)	4 shelves	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-4S-L00SN	12.0 (340)	7.2 (204)	4 shelves	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-4S-L0000SN	19.7 (558)	12.7 (360)	4 shelves	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-4S-L0000SN	24.6 (697)	16.8 (476)	4 shelves	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5B-R00GN	12.0 (340)	7.6 (215)	5 baskets	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-R0000GN	19.7 (558)	12.8 (362)	6 baskets	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-R0000GN	24.6 (697)	16.4 (464)	6 baskets	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5B-R00SN	12.0 (340)	7.6 (215)	5 baskets	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-R0000SN	19.7 (558)	12.8 (362)	6 baskets	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-R0000SN	24.6 (697)	16.4 (464)	6 baskets	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5B-L00GN	12.0 (340)	7.6 (215)	5 baskets	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-L0000GN	19.7 (558)	12.8 (362)	6 baskets	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-L0000GN	24.6 (697)	16.4 (464)	6 baskets	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5B-L00SN	12.0 (340)	7.6 (215)	5 baskets	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF20i-6B-L0000SN	19.7 (558)	12.8 (362)	6 baskets	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-6B-L0000SN	24.6 (697)	16.4 (464)	6 baskets	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF12i-5D-R00GN	12.0 (340)	7.5 (212)	5 drawers	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF12i-5D-R00SN	12.0 (340)	7.5 (212)	5 drawers	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF12i-5D-L00GN	12.0 (340)	7.5 (212)	5 drawers	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REF12i-5D-L00SN	12.0 (340)	7.5 (212)	5 drawers	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory

REF20i and REF25i Omnicell FlexLock-ready single door upright refrigerators

Infinity Series™ upright refrigerators designed for installation of Omnicell® XT FlexLock Refrigerator Lock and Temperature Monitor, with variable capacity compressor, LCD touchscreen user interface, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, user-programmable temperature display and integral alarming functions, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Interchangeable storage options allow the interior cabinet space to be configured with shelves, baskets or drawers to your exact needs. Certified to meet NSF/ANSI 456 standard for vaccine storage.

For additional product information, request form# 1027.

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Vaccine storage capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REFOMN12i-4S-R00G	12.0 (340)	7.2 (204)	4 shelves	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN20i-4S-R0000G	19.7 (558)	12.7 (360)	4 shelves	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REFOMN25i-4S-R0000G	24.6 (697)	16.8 (476)	4 shelves	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REFOMN12i-4S-R00S	12.0 (340)	7.2 (204)	4 shelves	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-4S-L00G	12.0 (340)	7.2 (204)	4 shelves	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN20i-4S-L0000G	19.7 (558)	12.7 (360)	4 shelves	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REFOMN25i-4S-L0000G	24.6 (697)	16.8 (476)	4 shelves	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REFOMN12i-4S-L00S	12.0 (340)	7.2 (204)	4 shelves	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5B-R00G	12.0 (340)	7.6 (215)	5 baskets	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN20i-6B-R0000G	19.7 (558)	12.8 (362)	6 baskets	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REFOMN25i-6B-R0000G	24.6 (697)	16.4 (464)	6 baskets	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REFOMN12i-5B-R00S	12.0 (340)	7.6 (215)	5 baskets	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5B-L00G	12.0 (340)	7.6 (215)	5 baskets	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN20i-6B-L0000G	19.7 (558)	12.8 (362)	6 baskets	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REFOMN25i-6B-L0000G	24.6 (697)	16.4 (464)	6 baskets	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REFOMN12i-5B-L00S	12.0 (340)	7.6 (215)	5 baskets	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5D-R00G	12.0 (340)	7.5 (212)	5 drawers	right	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5D-R00S	12.0 (340)	7.5 (212)	5 drawers	right	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5D-L00G	12.0 (340)	7.5 (212)	5 drawers	left	glass	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory
REFOMN12i-5D-L00S	12.0 (340)	7.5 (212)	5 drawers	left	stainless	no	no	23.75 (60.3)	26.60 (67.6)	72.00 (182.9)	420 (191)	Contact factory

REF20i-BB and REF25i-BB blood bank single door upright refrigerators


Infinity Series upright refrigerators with variable capacity compressor, LCD touchscreen user interface, six full-extension stainless steel drawers, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, user-programmable temperature display and integral alarming functions, integral 6.00" (15.24 cm) 7-day chart recorder standard with 50 Celsius charts, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Meets AABB, ARC and FDA standards for blood storage at 4 C.

For additional product information, request form# 1028.


See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Bags (450 ml)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF20i-BB-R0000G	19.7 (558)	312	6 drawers	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-BB-R0000G	24.6 (697)	432	6 drawers	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-BB-R00KPG	19.7 (558)	312	6 drawers	right	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-BB-R00KPG	24.6 (697)	432	6 drawers	right	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-BB-RHT00G	19.7 (558)	312	6 drawers	right	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-BB-RHT00G	24.6 (697)	432	6 drawers	right	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-BB-RHTKPG	19.7 (558)	312	6 drawers	right	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-BB-RHTKPG	24.6 (697)	432	6 drawers	right	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-BB-L0000G	19.7 (558)	312	6 drawers	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-BB-L0000G	24.6 (697)	432	6 drawers	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-BB-L00KPG	19.7 (558)	312	6 drawers	left	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-BB-L00KPG	24.6 (697)	432	6 drawers	left	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-BB-LHT00G	19.7 (558)	312	6 drawers	left	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-BB-LHT00G	24.6 (697)	432	6 drawers	left	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory
REF20i-BB-LHTKPG	19.7 (558)	312	6 drawers	left	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (216)	Contact factory
REF25i-BB-LHTKPG	24.6 (697)	432	6 drawers	left	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory

Upright refrigerators, fixed speed



REF12-LB



REF20/25-LB,
REFOMN20/25-LB



REF20/25-PH
REFOMN20/25-PH
REFVAC20/25-LB/PH



REFVAC20/25-PD



REF20/25-BB

REF12-LB, REF20-LB/PH and REF25-LB/PH single door upright refrigerators for laboratory and pharmacy

Medical-grade laboratory and pharmacy refrigerators for critical product storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged or left-hinged self-closing doors available in full-view, double pane glass with Low-E coating or solid stainless steel – must be specified at time of order. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves, 6 roll-out baskets or 12 full-extension stainless steel drawers.

For additional product information, request form# 8545 for REF12-LB, 8045 for REF20-LB/PH, 8050 for REF25-LB/PH or 8595 for REF20/25-PD

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF12-LB-R00G	11.8 (334)	4 shelves	right	glass	no	no	23.62 (60.0)	27.25 (69.2)	72.75 (184.8)	420 (191)	Contact factory
REF20-LB-R0000G	19.7 (558)	4 shelves	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-R0000G	24.6 (697)	4 shelves	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF12-LB-R00S	11.8 (334)	4 shelves	right	stainless	no	no	23.62 (60.0)	27.25 (69.2)	72.75 (184.8)	420 (191)	Contact factory
REF20-LB-R0000S	19.7 (558)	4 shelves	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-R0000S	24.6 (697)	4 shelves	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-LB-R00KPG	19.7 (558)	4 shelves	right	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-R00KPG	24.6 (697)	4 shelves	right	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-LB-R00KPS	19.7 (558)	4 shelves	right	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-R00KPS	24.6 (697)	4 shelves	right	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-LB-RHT00G	19.7 (558)	4 shelves	right	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-RHT00G	24.6 (697)	4 shelves	right	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-LB-RHTKPG	19.7 (558)	4 shelves	right	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-RHTKPG	24.6 (697)	4 shelves	right	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF12-LB-L00G	11.8 (334)	4 shelves	left	glass	no	no	23.62 (60.0)	27.25 (69.2)	72.75 (184.8)	420 (191)	Contact factory
REF20-LB-L0000G	19.7 (558)	4 shelves	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-L0000G	24.6 (697)	4 shelves	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-LB-L0000S	19.7 (558)	4 shelves	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-L0000S	24.6 (697)	4 shelves	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-LB-L00KPG	19.7 (558)	4 shelves	left	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-L00KPG	24.6 (697)	4 shelves	left	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-LB-L00KPS	19.7 (558)	4 shelves	left	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-L00KPS	24.6 (697)	4 shelves	left	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-LB-LHT00G	19.7 (558)	4 shelves	left	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-LHT00G	24.6 (697)	4 shelves	left	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-LB-LHTKPG	19.7 (558)	4 shelves	left	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-LHTKPG	24.6 (697)	4 shelves	left	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-PH-R0000G	19.7 (558)	6 baskets	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	473 (215)	Contact factory
REF25-PH-R0000G	24.6 (697)	6 baskets	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF20-PH-R0000S	19.7 (558)	6 baskets	right	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	473 (215)	Contact factory
REF25-PH-R0000S	24.6 (697)	6 baskets	right	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory
REF20-PH-R00KPG	19.7 (558)	6 baskets	right	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-PH-R00KPG	24.6 (697)	6 baskets	right	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-PH-R00KPS	19.7 (558)	6 baskets	right	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-PH-R00KPS	24.6 (697)	6 baskets	right	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-PH-RHT00G	19.7 (558)	6 baskets	right	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-PH-RHT00G	24.6 (697)	6 baskets	right	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-PH-RHTKPG	19.7 (558)	6 baskets	right	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-PH-RHTKPG	24.6 (697)	6 baskets	right	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-PH-L0000G	19.7 (558)	6 baskets	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	473 (215)	Contact factory
REF25-PH-L0000G	24.6 (697)	6 baskets	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory
REF20-PH-L0000S	19.7 (558)	6 baskets	left	stainless	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	473 (215)	Contact factory
REF25-PH-L0000S	24.6 (697)	6 baskets	left	stainless	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory
REF20-PH-L00KPG	19.7 (558)	6 baskets	left	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-PH-L00KPG	24.6 (697)	6 baskets	left	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-PH-L00KPS	19.7 (558)	6 baskets	left	stainless	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-PH-L00KPS	24.6 (697)	6 baskets	left	stainless	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-PH-LHT00G	19.7 (558)	6 baskets	left	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-PH-LHT00G	24.6 (697)	6 baskets	left	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-PH-LHTKPG	19.7 (558)	6 baskets	left	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-PH-LHTKPG	24.6 (697)	6 baskets	left	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-PD-R0000G	19.7 (558)	6 drawers	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-PD-R0000G	24.6 (697)	6 drawers	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory

REF20-LB/PH and REF25-LB/PH single door upright refrigerators with Wi-Fi remote monitoring

Medical-grade laboratory and pharmacy refrigerators with Wi-Fi based cloud communication functionality for continuous temperature monitoring and remote alarming for critical product storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged self-closing doors with full-view, double pane glass with Low-E coating. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves or 6 roll-out baskets standard in single door models.

For additional product information, request form# 9020.

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF20-LB-R0000G-N	19.7 (558)	4 shelves	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REF25-LB-R0000G-N	24.6 (697)	4 shelves	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REF20-PH-R0000G-N	19.7 (558)	6 baskets	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	473 (215)	Contact factory
REF25-PH-R0000G-N	24.6 (697)	6 baskets	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory

REF20-LB/PH and REF25-LB/PH Omnicell FlexLock-ready single door upright refrigerators

Medical-grade laboratory and pharmacy refrigerators designed for installation of Omnicell® XT FlexLock Refrigerator Lock and Temperature Monitor (not included). Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged self-closing doors with full-view, double pane glass with Low-E coating. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves or 6 roll-out baskets standard in single door models.

For additional product information, request form# 8970.

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REFOMN20-LB-R0000G	19.7 (558)	4 shelves	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REFOMN25-LB-R0000G	24.6 (697)	4 shelves	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REFOMN20-PH-R0000G	19.7 (558)	6 baskets	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	473 (215)	Contact factory
REFOMN25-PH-R0000G	24.6 (697)	6 baskets	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory

REFVAC20 and REFVAC25 single door upright NSF 456 certified vaccine refrigerators

Medical-grade NSF 456 certified refrigerators for vaccine storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged, self-closing door in full-view, double pane glass with Low-E coating. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves on REFVAC20/25-LB models, 6 roll-out baskets on REFVAC20/25-PH models or 6 stainless steel drawers on REFVAC20/25-PD models.

For additional product information, request form# 9010.

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REFVAC20-LB-R0000G	19.7 (558)	4 shelves	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	410 (186)	Contact factory
REFVAC25-LB-R0000G	24.6 (697)	4 shelves	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	447 (203)	Contact factory
REFVAC20-PH-R0000G	19.7 (558)	6 baskets	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	473 (215)	Contact factory
REFVAC25-PH-R0000G	24.6 (697)	6 baskets	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory
REFVAC20-PD-R0000G	19.7 (558)	6 drawers	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	475 (177)	Contact factory
REFVAC25-PD-R0000G	24.6 (697)	6 drawers	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	525 (238)	Contact factory

REF20-BB and REF25-BB single door upright refrigerators for blood banks


Blood bank refrigerators meet AABB and FDA requirements for storage of blood at 4 C. Stainless steel interior/exterior with top and bottom temperature probes and 16 oz bottle of glycerine. Right-hinged or left-hinged self-closing glass doors with full-view, double pane glass with Low-E coating – hinging must be specified at time of order. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 6.00" (15.24 cm) chart recorder. 115V/60/1 (103-132V) electrical. 6 stainless steel, full-extension drawers standard.

For additional product information, request form# 8055 for REF20 or 8060 for REF25.


See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Bags	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF20-BB-R0000G	19.7 (558)	312	6 drawers	right	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	487 (221)	Contact factory
REF25-BB-R0000G	24.6 (697)	432	6 drawers	right	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory
REF20-BB-R00KPG	19.7 (558)	312	6 drawers	right	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	487 (221)	Contact factory
REF25-BB-R00KPG	24.6 (697)	432	6 drawers	right	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory
REF20-BB-RHT00G	19.7 (558)	312	6 drawers	right	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	487 (221)	Contact factory
REF25-BB-RHT00G	24.6 (697)	432	6 drawers	right	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory
REF20-BB-RHTKPG	19.7 (558)	312	6 drawers	right	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	487 (221)	Contact factory
REF25-BB-RHTKPG	24.6 (697)	432	6 drawers	right	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory
REF20-BB-L0000G	19.7 (558)	312	6 drawers	left	glass	no	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	487 (221)	Contact factory
REF25-BB-L0000G	24.6 (697)	432	6 drawers	left	glass	no	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory
REF20-BB-L00KPG	19.7 (558)	312	6 drawers	left	glass	no	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	487 (221)	Contact factory
REF25-BB-L00KPG	24.6 (697)	432	6 drawers	left	glass	no	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory
REF20-BB-LHT00G	19.7 (558)	312	6 drawers	left	glass	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	487 (221)	Contact factory
REF25-BB-LHT00G	24.6 (697)	432	6 drawers	left	glass	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory
REF20-BB-LHTKPG	19.7 (558)	312	6 drawers	left	glass	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	487 (221)	Contact factory
REF25-BB-LHTKPG	24.6 (697)	432	6 drawers	left	glass	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	538 (244)	Contact factory


Upright refrigerators, fixed speed

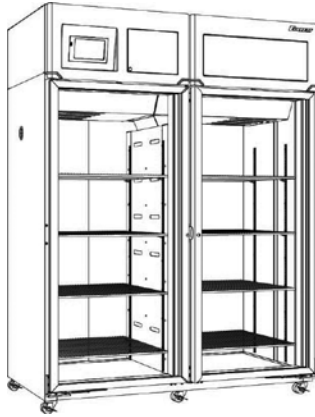


REF45-LB

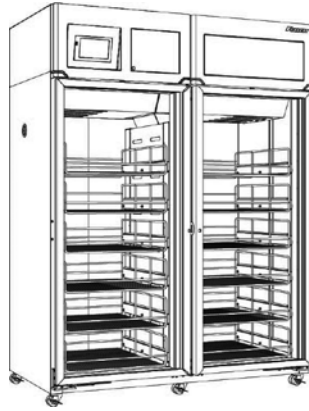

REF45-PH
REFVAC45-LB/PH

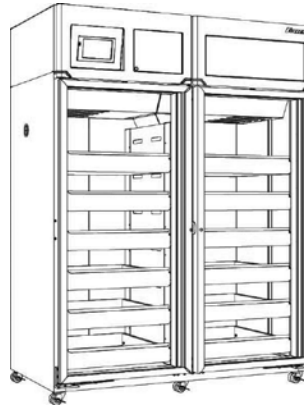

REFVAC45-PD

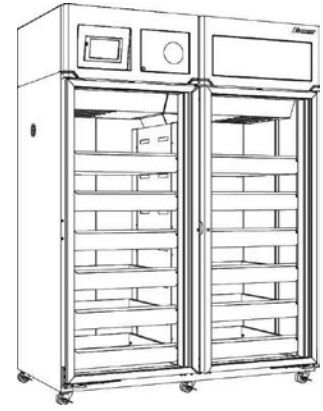

REF45-BB

REF45-LB/PH double door upright refrigerators for laboratory and pharmacy

Medical-grade laboratory and pharmacy refrigerators for critical product storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged, left-hinged or outer-hinged self-closing doors available in full-view, double pane glass with Low-E coating or solid stainless steel – must be specified at time of order. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 8 epoxy-coated shelves, 12 roll-out baskets or 12 full-extension stainless steel drawers.

For additional product information, request form# 8150 for REF45-LB, 8155 for REF45-PH or 8595 for REF45-PD.

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF45-LB-R0000G	45.0 (1274)	8 shelves	right	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-L0000G	45.0 (1274)	8 shelves	left	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-O0000G	45.0 (1274)	8 shelves	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-R0000S	45.0 (1274)	8 shelves	right	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-L0000S	45.0 (1274)	8 shelves	left	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-O0000S	45.0 (1274)	8 shelves	outer	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-000KPG	45.0 (1274)	8 shelves	outer	glass	no	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-000KPS	45.0 (1274)	8 shelves	outer	stainless	no	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-RHT00G	45.0 (1274)	8 shelves	right	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-LHT00G	45.0 (1274)	8 shelves	left	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-OHT00G	45.0 (1274)	8 shelves	outer	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-LB-OHTKPG	45.0 (1274)	8 shelves	outer	glass	yes	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REF45-PH-R0000G	45.0 (1274)	12 baskets	right	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-L0000G	45.0 (1274)	12 baskets	left	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-O0000G	45.0 (1274)	12 baskets	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-R0000S	45.0 (1274)	12 baskets	right	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-L0000S	45.0 (1274)	12 baskets	left	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-O0000S	45.0 (1274)	12 baskets	outer	stainless	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-000KPG	45.0 (1274)	12 baskets	outer	glass	no	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-000KPS	45.0 (1274)	12 baskets	outer	stainless	no	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-RHT00G	45.0 (1274)	12 baskets	right	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-LHT00G	45.0 (1274)	12 baskets	left	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-OHT00G	45.0 (1274)	12 baskets	outer	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PH-OHTKPG	45.0 (1274)	12 baskets	outer	glass	yes	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REF45-PD-00000G	45.0 (1274)	12 drawers	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory

REFVAC45 double door upright NSF 456 certified vaccine refrigerators

Medical-grade NSF 456 certified refrigerators for vaccine storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Outer hinges, self-closing door in full-view, double pane glass with Low-E coating. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 8 epoxy-coated shelves on REFVAC45-LB models, 12 roll-out baskets on REFVAC45-PH models or 12 stainless steel drawers on REFVAC45-PD models.

For additional product information, request form# 9010.

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Storage System	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REFVAC45-LB-00000G	45.0 (1274)	8 Shelves	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	750 (341)	Contact factory
REFVAC45-PH-00000G	45.0 (1274)	12 Baskets	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	890 (404)	Contact factory
REFVAC45-PD-00000G	45.0 (1274)	12 Drawers	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory

REF45-BB double door upright refrigerators for blood banks


Blood bank refrigerators meet AABB and FDA requirements for storage of blood at 4 C. Stainless steel interior/exterior with top and bottom temperature probes and 16 oz bottle of glycerine. Right-hinged, left-hinged or outer-hinged self-closing glass doors with full-view, double pane glass with Low-E coating – hinging must be specified at time of order. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 6.00" (15.24 cm) chart recorder. 115V/60/1 (103-132V) electrical. 12 stainless steel, full-extension drawers standard.

For additional product information, request form# 8160.


See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Bags (450 ml)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
REF45-BB-R0000G	45.0 (1274)	816	12 drawers	right	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-L0000G	45.0 (1274)	816	12 drawers	left	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-00000G	45.0 (1274)	816	12 drawers	outer	glass	no	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-000KPG	45.0 (1274)	816	12 drawers	outer	glass	no	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-RHT00G	45.0 (1274)	816	12 drawers	right	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-LHT00G	45.0 (1274)	816	12 drawers	left	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-0HT00G	45.0 (1274)	816	12 drawers	outer	glass	yes	no	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory
REF45-BB-0HTKPG	45.0 (1274)	816	12 drawers	outer	glass	yes	yes	59.75 (151.8)	33.55 (85.2)	79.54 (202.0)	930 (422)	Contact factory

Countertop freezers



FZR1



FZR2
FZRVAC2

FZR1 and FZR2 countertop freezers

Medical-grade forced air countertop freezers with external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.

For additional product information, request form# 6860 for FZR1 or 6865 for FZR2.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZR1	0.6 (16)	right	no	stainless	18.60 (47.2)	24.00 (61.0)	17.93 (45.5)	108 (49)	\$6,435
FZR1-KP	0.6 (16)	right	yes	stainless	18.60 (47.2)	24.00 (61.0)	17.93 (45.5)	108 (49)	\$7,210
FZR2	1.6 (44)	right	no	stainless	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	126 (57)	\$6,850
FZR2-KP	1.6 (44)	right	yes	stainless	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	126 (57)	\$7,625

FZRVAC2 countertop NSF 456 certified vaccine freezers


Medical-grade NSF 456 certified freezers for vaccine storage. Forced air countertop freezers with external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.

For additional product information, request form# 9125.


See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZRVAC2	1.6 (44)	right	no	stainless	18.60 (47.2)	24.00 (61.0)	27.93 (70.9)	126 (57)	\$7,075


Undercounter freezers



Performance Plus
LED display



Performance Plus
7" LCD touchscreen display



Edge Series

FZR4P and FZR5P Performance Plus undercounter freezers

Medical-grade -20 C (-4 F), undercounter freezers, freestanding or stackable, with external temperature display in F or C, integral alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model FZR4P fits below 34.00" (86.4 cm) ADA-compatible counter and model FZR5P fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order.

For additional product information, request form# 6465 for FZR4P, 6470 for FZR5P, 6515 for FZR4P-T, or 6520 for FZR5P-T.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
LED digital temperature display									
FZR4P-OR-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$8,565
FZR5P-OR-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$8,565
FZR4P-OR-KP-00	3.9 (110)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$9,340
FZR5P-OR-KP-00	4.5 (127)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$9,340
FZR4P-OL-00-00	3.9 (110)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$8,565
FZR5P-OL-00-00	4.5 (127)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$8,565
FZR4P-OL-KP-00	3.9 (110)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$9,340
FZR5P-OL-KP-00	4.5 (127)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$9,340
7" LCD touchscreen digital temperature display									
FZR4P-TR-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$10,065
FZR5P-TR-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,065
FZR4P-TR-KP-00	3.9 (110)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$10,515
FZR5P-TR-KP-00	4.5 (127)	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,515
FZR4P-TL-00-00	3.9 (110)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$10,065
FZR5P-TL-00-00	4.5 (127)	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,065
FZR4P-TL-KP-00	3.9 (110)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$10,515
FZR5P-TL-KP-00	4.5 (127)	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,515

FZRVAC4P and FZRVAC5P Performance Plus undercounter NSF 456 certified vaccine freezers

Medical-grade NSF 456 certified freezers for vaccine storage. -20 C (-4 F), undercounter freezers, freestanding or stackable, with external temperature display in F or C, integral alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model FZRVAC4P fits below 34.00" (86.4 cm) ADA-compatible counter and model FZRVAC5P fits below a standard 36.00" (91.4 cm) high counter. Right-hinged only.

For additional product information, request form# 9120.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
LED digital temperature display									
FZRVAC4P-OR-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$8,790
FZRVAC5P-OR-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$8,790
7" LCD touchscreen digital temperature display									
FZRVAC4P-TR-00-00	3.9 (110)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	31.38 (79.7)	205 (93)	\$10,290
FZRVAC5P-TR-00-00	4.5 (127)	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$10,290

FZR5PLP-T Performance Plus undercounter plasma freezer

High performance -30 C (-22 F), undercounter plasma freezer, freestanding or stackable, with 7" LCD touchscreen user interface with integral data and event logging. Stainless steel construction on interior/exterior with interior LED lighting. 115V/60/1 electrical. For undercounter applications: fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order. Two full extension stainless drawers standard. Includes separate temperature surveillance module with audible/visual alarm, 7-day chart recorder and digital product temperature display. Meets AABB, FDA, ARC requirements.

For additional product information, request form# 6480.

See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Plasma boxes (300 ml)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZR5PLP-TR-00-00	4.5 (127)	40	right	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$14,210
FZR5PLP-TR-KP-00	4.5 (127)	40	right	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$14,660
FZR5PLP-TL-00-00	4.5 (127)	40	left	no	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$14,210
FZR5PLP-TL-KP-00	4.5 (127)	40	left	yes	stainless	23.75 (60.3)	27.00 (68.6)	34.00 (86.4)	205 (93)	\$14,660

FZRNAT5 Edge Series undercounter freezer


Medical-grade undercounter freezer with LED control, right-hinged solid door, painted steel exterior, preset automatic alarm tracking around set point, 3 coated steel wire shelves, manual defrost, variable speed compressor, R600a natural refrigerant. 115V/60/1 electrical. Fits below standard 36.00" (91.4 cm) counter.

For additional product information, request form# 9050.


See page 33 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Hinging	Keypad	Door style	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	Net price
FZRNAT5-SD	5.0 (142 L)	right	no	painted steel	23.84 (60.6)	24.50" (62.2)	34.10 (86.6)	130 (59)	\$2,699


Upright freezers

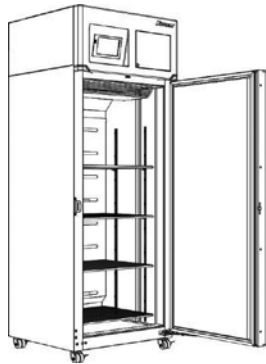


FZR20-LB

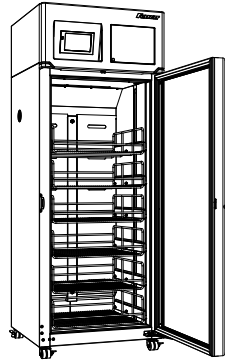


FZRVAC20/25-LB with additional shelf accessory



FZRMD24

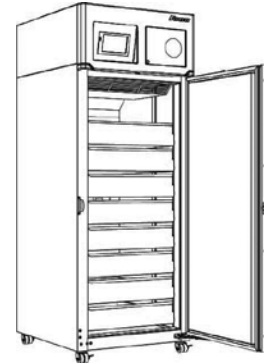

FZR25-PL



FZRDCMD17

FZR20-LB and FZR25-LB single door upright freezers for laboratory and pharmacy

Medical-grade -30 C laboratory and pharmacy freezers for critical product storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right or left-hinged, heavy-duty, insulated stainless steel door with ADA-compliant full length locking handle. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves standard.

For additional product information, request form# 8065 for FZR20 and 8070 for FZR25.

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZR20-LB-RHT00S	19.7 (558)	4 shelves	right	stainless	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	480 (218)	Contact factory
FZR25-LB-RHT00S	24.6 (697)	4 shelves	right	stainless	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	480 (218)	Contact factory
FZR20-LB-RHTKPS	19.7 (558)	4 shelves	right	stainless	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	480 (218)	Contact factory
FZR25-LB-RHTKPS	24.6 (697)	4 shelves	right	stainless	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	480 (218)	Contact factory
FZR20-LB-LHT00S	19.7 (558)	4 shelves	left	stainless	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	480 (218)	Contact factory
FZR25-LB-LHT00S	24.6 (697)	4 shelves	left	stainless	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	480 (218)	Contact factory
FZR20-LB-LHTKPS	19.7 (558)	4 shelves	left	stainless	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	480 (218)	Contact factory
FZR25-LB-LHTKPS	24.6 (697)	4 shelves	left	stainless	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	480 (218)	Contact factory

FZRVAC20-LB and FZRVAC25-LB single door upright NSF 456 certified vaccine freezers

Medical-grade NSF 456 certified -30 C laboratory and pharmacy freezers for vaccine storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged, heavy-duty, insulated stainless steel door with ADA-compliant full length locking handle. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves standard.

For additional product information, request form# 9035.

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZRVAC20-LB-RHT00S	19.7 (558)	4 shelves	right	stainless	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	480 (218)	Contact factory
FZRVAC25-LB-RHT00S	24.6 (697)	4 shelves	right	stainless	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	480 (218)	Contact factory

FZRMD24 -30 C single door upright freezer for laboratory

PHCbi brand high performance biomedical freezer, 24.4 cu ft capacity, -18 C to -40 C temperature range, solid door, 4 adjustable shelves, microprocessor controller with digital display. High/low temperature, power failure and door alarming. 115V/60/1 electrical. ENERGY STAR certified.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZRMD24	24.4 (690)	4 shelves	30.30 (77.0)	32.70 (83.0)	77.00 (195.5)	568 (258)	Contact factory

FZR20 and FZR25 single door upright freezers for plasma

Plasma freezers meet AABB and FDA requirements for storage of blood plasma at -30 C. Stainless steel interior/exterior with top and bottom temperature probes and 16 oz bottle of glycerine. Right-hinged, heavy-duty, insulated stainless steel door with ADA-compliant full length locking handle (left-hinged door available – must be specified at time of order). External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 6.00" (15.24 cm) chart recorder and 8 stainless steel, full-extension drawers standard.

For additional product information, request form# 8080.

See page 34 for additional accessory information.

Item number	Cubic capacity cu ft (L)	FFP ¹ cartons (5"x8"x1.13")	Storage system	Hinging	Door style	Heated door	Keypad	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZR20-PL-RHT00S	19.7 (558)	352	8 drawers	right	stainless	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	568 (258)	Contact factory
FZR25-PL-RHT00S	24.6 (697)	472	8 drawers	right	stainless	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	628 (285)	Contact factory
FZR20-PL-RHTKPS	19.7 (558)	352	8 drawers	right	stainless	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	568 (258)	Contact factory
FZR25-PL-RHTKPS	24.6 (697)	472	8 drawers	right	stainless	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	628 (285)	Contact factory
FZR20-PL-LHT00S	19.7 (558)	352	8 drawers	left	stainless	yes	no	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	568 (258)	Contact factory
FZR25-PL-LHT00S	24.6 (697)	472	8 drawers	left	stainless	yes	no	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	628 (285)	Contact factory
FZR20-PL-LHTKPS	19.7 (558)	352	8 drawers	left	stainless	yes	yes	29.75 (75.6)	30.50 (77.5)	79.50 (201.9)	568 (258)	Contact factory
FZR25-PL-LHTKPS	24.6 (697)	472	8 drawers	left	stainless	yes	yes	29.75 (75.6)	36.50 (92.7)	79.50 (201.9)	628 (285)	Contact factory


¹ Fresh frozen plasma.

FZR8-PC plasma chiller

High performance -40 C to -40 F plasma chiller with touchscreen temperature controller and alarms. Stainless steel AISI 304 interior and exterior construction. 220V/60/3 electrical. 4 casters and 8 shelves.

Intended for use as a rapid freezer. This is not intended for long-term storage.

For additional product information, request form# 8930.



FZR8-PC

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Approx. ship wt lb (kg)	List price
FZR8-PC	7.5 cu ft (212) (80) bags	8 shelves	31.50 (80.0)	32.88 (83.5)	77.31 (196.4)	645 (293)	Contact factory


FZRDCMD17 dual chamber biomedical ECO upright freezer

PHCbi brand -40 C biomedical ECO dual chamber freezer, 16.9 cu ft capacity (8.46 cu ft per chamber), -20 C to -40 C temperature range, solid doors, 6 shelves (4 adjustable), microprocessor controller with LED display. Manual defrost function. High/low temperature, power failure alarming. ENERGY STAR certified.


For additional product information, request form# 12618.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRDCMD17	16.9 (479)	6 shelves	31.20 (79.3)	30.30 (77.0)	70.90 (180.1)	115/60	410 (186)	Contact factory


Combination refrigerator/freezer



REFFZR9



REFFZR16

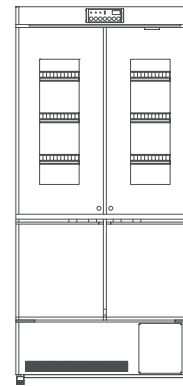

REFFZR21

REFFZR9 pharmaceutical combination refrigerator and freezer

Model REFFZR9-GS. PHCbi brand pharmaceutical combination 6.3 cu ft refrigerator (+2 C to +14 C) and 2.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, glass door on refrigerator, solid door on freezer, 3 glass shelves in refrigerator/1 coated wire shelf in freezer.

Model REFFZR9-SS. PHCbi brand pharmaceutical combination 6.3 cu ft refrigerator (+2 C to +14 C) and 2.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, solid door on refrigerator and freezer, 3 glass shelves in refrigerator/1 coated wire shelf in freezer.

For additional product information, request form# 12839.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
REFFZR9	6.3 (178) refrigerator 2.8 (79) freezer	3 glass shelves in refrigerator 1 wire shelf in freezer	20.00 (50.8)	25.00 (63.5)	71.20 (180.1)	115/60	210 (95)	Contact factory

REFFZR16 pharmaceutical combination refrigerator and freezer

Model REFFZR16-GS. PHCbi brand pharmaceutical combination 11.5 cu ft refrigerator (+2 C to +14 C) and 4.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, glass double doors on refrigerator, solid double doors on freezer, 3 adjustable shelves in refrigerator/2 shelves in freezer, microprocessor controller with softkey interface and OLED display. High/low temperature, power, sensor and door alarms.

Model REFFZR16-SS. PHCbi brand pharmaceutical combination 11.5 cu ft refrigerator (+2 C to +14 C) and 4.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, solid double doors on refrigerator and freezer, 3 adjustable shelves in refrigerator/2 shelves in freezer, microprocessor controller with LED display. High/low temperature, power, sensor and door alarms.

For additional product information, request form# 12507.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
REFFZR16	11.5 (326) refrigerator 4.8 (136) freezer	3 shelves in refrigerator 2 shelves in freezer	31.50 (80.0)	25.20 (64.0)	71.30 (181.1)	115/60	337 (153)	Contact factory


REFFZR21 pharmaceutical combination refrigerator and freezer

PHCbi brand pharmaceutical combination 14.7 cu ft refrigerator (+2 C to +14 C) and 6.2 cu ft freezer (-30 C to -20 C), independent refrigeration systems, glass double doors on refrigerator, solid double doors on freezer, 3 adjustable shelves in refrigerator/2 shelves in freezer, microprocessor controller with softkey interface and OLED display. High/low temperature, power, sensor and door alarms.


For additional product information, request form# 12620.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
REFFZR21-GS	14.7 (415) refrigerator 6.2 (176) freezer	3 shelves in refrigerator 2 shelves in freezer	35.40 (90.0)	28.10 (71.5)	75.20 (191.0)	115/60	439 (199)	Contact factory

Ultra-low chest freezers

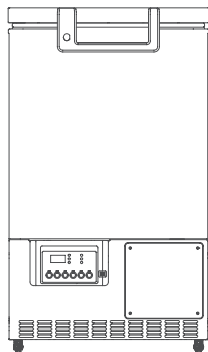

FZRC3

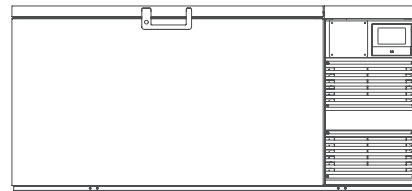

FZRC25

FZRC3-80 C ultra-low temperature chest freezer

PHCbi brand VIP Series -80 C ultra-low temperature chest freezer, 3.0 cu ft capacity, -60 C to -80 C temperature range, insulated locking lid with sub for additional temperature protection, microprocessor controller with LED display. High/low temperature, power failure alarming. ENERGY STAR certified.

For additional product information, request form# 12599.

Item number	Cubic capacity cu ft (L)	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRC3-ULT-115	3.0 (85)	21.70 (55.0)	27.00 (68.5)	37.20 (94.5)	115/60	190 (86)	Contact factory


FZRC25-86 C ultra-low temperature chest freezer

PHCbi brand TwinGuard Series -86 C ultra-low temperature chest freezer with dual cooling system, 25.3 cu ft capacity, -50 C to -86 C temperature range, insulated locking lid with sub lid for additional temperature protection, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12684.

Item number	Cubic capacity cu ft (L)	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRC25-ULT-220	25.3 (708)	90.60 (230.0)	37.60 (95.5)	42.10 (107.0)	220/60	807 (366)	Contact factory

Ultra-low upright freezers

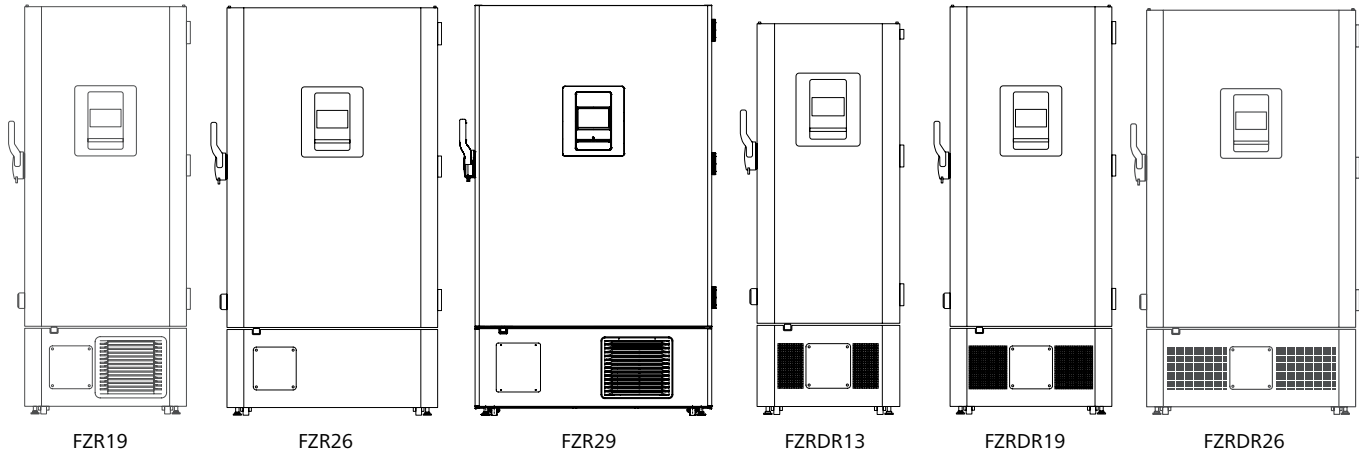

FZR19 -86 C ultra-low temperature VIP ECO upright freezer

PHCbi brand VIP ECO Series -86 C ultra-low temperature upright freezer, 18.6 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms. ENERGY STAR certified.

For additional product information, request form# 12600.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZR19-ULT-115	18.6 (528)	3 shelves	31.10 (79.0)	34.70 (88.2)	78.50 (199.3)	115/60	628 (285)	Contact factory
FZR19-ULT-220	18.6 (528)	3 shelves	31.10 (79.0)	34.70 (88.2)	78.50 (199.3)	220/60	628 (285)	Contact factory

FZR26 -86 C ultra-low temperature VIP ECO upright freezer

PHCbi brand VIP ECO Series -86 C ultra-low temperature upright freezer, 25.7 cu ft capacity, -40 C to -90 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms. ENERGY STAR certified.

For additional product information, request form# 12506.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZR26-ULT-115	25.7 (729)	3 shelves	25.7 (729)	36.80 (93.5)	78.50 (199.3)	115/60	827 (375)	Contact factory
FZR26-ULT-220	25.7 (729)	3 shelves	25.7 (729)	36.80 (93.5)	78.50 (199.3)	220/60	827 (375)	Contact factory

FZR29 -86 C ultra-low temperature VIP ECO upright freezer

PHCbi brand VIP ECO Series -86 C ultra-low temperature upright freezer, 29.8 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms. ENERGY STAR certified.

For additional product information, request form# 12601.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZR29-ULT-115	29.8 (845)	3 shelves	45.30 (115.0)	34.30 (87.0)	78.50 (199.3)	115/60	855 (387)	Contact factory

FZRDR13 -86 C ultra-low temperature TwinGuard upright freezer

PHCbi brand TwinGuard Series -86 C ultra-low temperature upright freezer with dual cooling system, 12.7 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 inner insulated doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12615.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRDR13-ULT-220	12.7 (360)	3 shelves	26.40 (67.0)	34.70 (88.2)	72.40 (184.0)	220/60	556 (252)	Contact factory

FZRDR19 -86 C ultra-low temperature TwinGuard upright freezer

PHCbi brand TwinGuard Series -86 C ultra-low temperature upright freezer with dual cooling system, 18.6 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12616.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRDR19-ULT-220	18.6 (528)	3 shelves	31.10 (79.0)	34.70 (88.2)	78.50 (199.3)	220/60	723 (328)	Contact factory


FZRDR26 -86 C ultra-low temperature TwinGuard upright freezer

PHCbi brand TwinGuard Series -86 C ultra-low temperature upright freezer with dual cooling system, -50 C to -86 C temperature range, 25.7 cu ft capacity, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.


For additional product information, request form# 12617.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRDR26-ULT-220	25.7 (729)	3 shelves	40.60 (103.0)	36.8 (93.5)	78.50 (199.3)	220/60	827 (375)	Contact factory

Cryogenic freezers and CO2 incubators

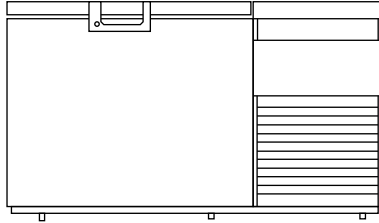

FZRC8

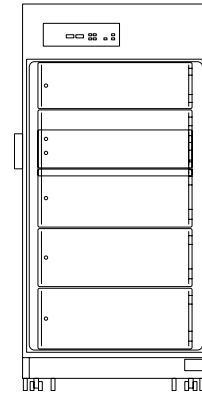

CO2INC30-G

FZRC8 -150 C cryogenic chest freezer

PHCbi brand -150 C cryogenic chest freezer with autocascade refrigeration system, 8.2 cu ft capacity, -125 C to -150 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, microprocessor controller with LCD display. High/low temperature, sensor, power, and lid alarms.

For additional product information, request form# 12602.

Item number	Cubic capacity cu ft (L)	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
FZRC8-220	8.2 (232.2)	68.10 (173.0)	30.10 (76.5)	39.80 (101.0)	220/60	961 (436)	Contact factory

CO2INC30 Reach-In CO2 incubator

PHCbi brand Reach-in CO2 incubator, 30.1 cu ft, glass door, normal (80% RH or above) or high (90% RH or above) humidity mode, microprocessor controller with 2 LED displays (temperature and CO2), 5 shelves. Comprehensive alarm system with audible and visual alarms

For additional product information, request form# 12621.

Item number	Cubic capacity cu ft (L)	Storage system	Width in (cm)	Depth in (cm)	Height in (cm)	Voltage	Approx. ship wt lb (kg)	List price
CO2INC30-G	30.1 (851)	5 shelves	38.60 (98.6)	37.2 (94.5)	80.3 (204.0)	115/60	694 (315)	Contact factory

Refrigerator and freezer accessories

Countertop refrigerator and freezer accessories and warranties

Item number	Description	Net price
00969931	Organizing bins, set of 6	\$65
00969956	Additional shelf (1)	\$65
00959296	Glycerine, 16 oz	\$50
00969949	Wall mount kit	\$410
01111947	Casters (set of 4)	\$235
01184845	Pedestal, 2.00" (5.08 cm)	\$370
01025899	Pedestal, fan-assist, 4.50" (11.43 cm)	\$270
01025881	Pedestal, 12.00" (30.5 cm)	\$270
01100742	Stacking kit (countertop on countertop)	\$375
01100759	Stacking kit (countertop on Performance Plus undercounter)	\$375
01142363	Stacking kit (countertop on REF/FZR Series undercounter)	\$375
01092022	NO/NC dry contacts for connection to remote alarm systems	\$40
00112185	Temperature alarm with dry contacts for remote alarming	\$415
00168674	Temperature surveillance module (includes alarm, 6.00" (15.24 cm) chart recorder, remote contacts)	\$1,340
01077841	Replacement NTC probe with certificate of NIST-traceable calibration	\$165
01528512	DicksonOne VFC-compliant freestanding display data logger with Wi-Fi and Ethernet capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$598
01528538	DicksonOne VFC-compliant freestanding touchscreen data logger with Power Over Ethernet and Wi-Fi capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$889
01539691	Ambient temperature and humidity sensor, right angle, for use with DicksonOne freestanding display and touchscreen data loggers	\$119
EW12	Optional extended one year warranty on parts and labor only (available with new equipment only)	\$150
EW36	Optional extended three year warranty on parts and labor only (available with new equipment only)	\$300

Undercounter refrigerator and freezer accessories and warranties

Item number	Description	Net price
01059484	Additional shelf (1), Performance Plus	\$100
01462316	Additional shelves (2), REFADV5-SD	\$50
01053644	Drawer accessory kit (1 drawer, glide hardware, flush front panel), Performance Plus. Not for use with VAC models.	\$210
01067750	Drawer accessory kit (2 drawers, glide hardware, flush front panel), Performance Plus. Not for use with VAC models.	\$280
00959296	Glycerine, 16 oz	\$50
00153700	Wall mount kit, Performance Plus	\$295
01059104	Seismic bracket kit, Performance Plus	\$250
01053636	Casters (set of 4 with spacers), Performance Plus	\$185
01059120	Pedestal base, 23.75" wide x 24.00" deep x 17.00" high (60.3 x 61.0 x 43.2 cm), stainless, Performance Plus	\$575
01528157	Stacking kit (Edge Series on Edge Series)	\$365
01054006	Stacking kit (Performance Plus on Performance Plus)	\$365
01067172	Stacking kit (REF/FZR Series on Performance Plus)	\$375
01059096	Universal ADC-compatible bracket (for all medication dispensing system locks), Performance Plus	\$85
01092022	NO/NC dry contacts for connection to remote alarm systems, Performance Plus	\$40
00112185	Temperature alarm with dry contacts for remote alarming	\$415
00168674	Temperature surveillance module (includes alarm, 6.00" (15.24 cm) chart recorder, remote contacts)	\$1,340
01077841	Replacement NTC probe with certificate of NIST-traceable calibration	\$165
01528512	DicksonOne VFC-compliant freestanding display data logger with Wi-Fi and Ethernet capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$598
01528538	DicksonOne VFC-compliant freestanding touchscreen data logger with Power Over Ethernet and Wi-Fi capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$889
01539691	Ambient temperature and humidity sensor, right angle, for use with DicksonOne freestanding display and touchscreen data loggers	\$119
EW12	Optional extended one year warranty on parts and labor only (available with new equipment only)	\$300
EW36	Optional extended three year warranty on parts and labor only (available with new equipment only)	\$600

Upright refrigerator and freezer accessories and warranties

Item number	Description	Net price
01548791	Replacement CRS (Complete Refrigeration System) module, all Infinty Series models (REF12i, REF20i, REF25i)	\$2,150
01312529	Replacement CRS (Complete Refrigeration System) module, REF12	\$1,320
00939785	Replacement CRS (Complete Refrigeration System) module, REF20/25, REFVAC20/25	\$2,095
01147891	Replacement high-side refrigeration module (complete condensing unit), REF45, REFVAC45	\$1,675
01007004	Replacement CRS (Complete Refrigeration System) module, FZR20/25	\$3,455
01059484	Additional shelf kit (includes 1 shelf and 4 screws), REF12i	\$100
01548809	Additional shelf kit (includes 1 shelf and 4 screws), REF20i	\$125
01548817	Additional shelf kit (includes 1 shelf and 4 screws), REF25i	\$125
01461268	Additional shelf (1), REFVAC20-LB, FZRVAC20-LB	\$95
01460708	Additional shelf (1), REFVAC25/45-LB, FZRVAC25-LB	\$95
01311976	Additional shelf (1), REF12-LB	\$95
00927251	Additional shelves (2), REF20-LB, FZR20-LB	\$185
00927269	Additional shelves (2), REF25/45-LB, FZR25-LB	\$185
01543925	Basket kit (includes 1 basket, 8 rollers, 4 screws and nuts and 2 slides), REF12i	\$200
01548825	Basket kit (includes 1 basket, 8 rollers, 8 screws and nuts and 2 slides), REF20i	\$200
01548833	Basket kit (includes 1 basket, 8 rollers, 8 screws and nuts and 2 slides), REF25i	\$200
01543933	Drawer kit (includes 1 drawer, 8 rollers, 4 screws and nuts and 2 slides), REF12i	\$210
01548841	Drawer kit (includes 1 drawer, 8 rollers, 8 screws and nuts and 2 slides), REF20i	\$210
01548858	Drawer kit (includes 1 drawer, 8 rollers, 8 screws and nuts and 2 slides), REF25i	\$210
00927202	Pyxis® compatible door bracket, REF20/25/45	\$210
00978296	medDISPENSE® compatible door bracket, REF20/25/45, FZR20/25	\$210
00966432	Omnicell® compatible door bracket, REF20/25/45	\$210
01319441	Wall bracket kit, seismic anchoring, REF12	\$160
01543883	Wall bracket kit, seismic anchoring, REF12i	\$160
00927194	Wall bracket kit, seismic anchoring, REF20i/25i, REF20/25/45, FZR20/25	\$160
01140458	Replacement "quick-connect" RTD probe with certificate of NIST-traceable calibration, REF12, REF20/25, REFVAC20/25, REF45 and REFVAC45 before serial number Q86639, FZR20/25 and FZRVAC20/25	\$280
01540640	Replacement "quick connect" RTD probe with certificate of NIST-traceable calibration, REF45 and REFVAC45 after serial number Q86638	\$280
01528512	DicksonOne VFC-compliant freestanding display data logger with Wi-Fi and Ethernet capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$598
01528538	DicksonOne VFC-compliant freestanding touchscreen data logger with Power Over Ethernet and Wi-Fi capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud.	\$889
01539691	Ambient temperature and humidity sensor, right angle, for use with DicksonOne freestanding display and touchscreen data loggers	\$119
EW12	Optional extended one year warranty on parts and labor only, REF12 (available with new equipment only)	\$450
EW36	Optional extended three year warranty on parts and labor only, REF12 (available with new equipment only)	\$900
EW12	Optional extended one year warranty on parts and labor only, REF20/25 (available with new equipment only)	\$450
EW36	Optional extended three year warranty on parts and labor only, REF20/25 (available with new equipment only)	\$900
EW12	Optional extended one year warranty on parts and labor only, REF45 (available with new equipment only)	\$600
EW36	Optional extended three year warranty on parts and labor only, REF45 (available with new equipment only)	\$1,300
EW12	Optional extended one year warranty on parts and labor only, FZR20/FZR25 (available with new equipment only)	\$600
EW36	Optional extended three year warranty on parts and labor, FZR20/FZR25 (available with new equipment only)	\$1,200

Ice and water dispensers

Follett ice and water dispensers are chosen by more healthcare facilities than any other brand for good reason. We offer the industry's largest selection, with more than 30 sizes and configurations to meet the needs of virtually any application. Designed specifically for healthcare, Follett dispensers offer 12, 25, 50 or 90 lb of storage in attractive, space-saving cabinets, with customer-valued features, exceptional reliability, and after-the-sale service and support.

Warranty

Symphony Plus™ ice and water dispensers

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 3 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 3 year period are covered under this warranty. For products sold outside of the U.S., the labor warranty will apply only to equipment sold and serviced through a Follett Authorized Distributor in its designated territory.

The compressor shall be covered for an additional 2 years (parts only), for a total of 5 years from the date of installation.

WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett.
- Customer has documented record of preventive maintenance and cleaning of the machine every 6 months according to the instructions in the dispenser Installation, Operations and Service Manual.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond the control of Follett are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective upon examination.
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.

This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship.

Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.

Symphony Plus ice and water dispensers – 12 series


Countertop and wall mount ice and water dispensers with 12 lb (5.4 kg) of storage. 12CI and C12CI integral ice machine uses R404a refrigerant and produces up to 425 lb (193 kg) of ice per day. E12CI integral ice machine uses R290 refrigerant and produces up to 388 lb (176 kg) of ice per day. C12CI and E12CI models are not for use in the United States.

All models feature stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing. Wall mount models only available with SensorSAFE infrared dispensing.


For additional product information, request form# 6620 for 12CI models, 6625 for 12HI models, 6940 for C12CI models or 1000 for E12CI.

12 series accessories **Net price**
 4.00" (10.16 cm) leg kit for 12CI (item# AF10LBLEGS) \$135

See page 41 for additional accessory information.



Countertop with integral ice machine



Wall mount with integral ice machine (SensorSAFE dispensing only)

Item number	Configuration	Dispenser	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
12CI425 series ice and water dispensers										
12CI425A-S	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	115/60/1	199 (90)	\$11,070
12CI425A-L	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	115/60/1	199 (90)	\$11,070
C12CI425A-S ¹	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	220/60/1	199 (90)	\$11,270
C12CI425A-L ¹	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	220/60/1	199 (90)	\$11,270
12HI425A-S0-00	Wall mount ²	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	115/60/1	179 (81)	\$14,045
12HI425A-S0-DP	Wall mount ²	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	115/60/1	184 (84)	\$14,475
E12CI414 series ice and water dispensers										
E12CI414A-S ¹	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	230/50/1	199 (90)	\$11,270
E12CI414A-L ¹	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	230/50/1	199 (90)	\$11,270

¹ Models not for use in the United States.

² 12HI425A-S0-DP wall mount unit configured with drain pan. 12HI425A-S0-00 wall mount unit configured without drain pan.

Symphony Plus ice-only dispensers – 12 series


Countertop ice dispensers with 12 lb (5.4 kg) of storage. Ice-only; no water. 12CI and C12CI integral ice machine uses R404a refrigerant and produces up to 425 lb (193 kg) of ice per day. E12CI integral ice machine uses R290 refrigerant and produces up to 388 lb (176 kg) of ice per day. C12CI and E12CI models are not for use in the United States.

All models feature stainless steel cabinet with accent trim. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.

For additional product information, request form# 6620 for 12CI models, 6625 for 12HI models, 6940 for C12CI models or 1000 for E12CI.

12 series accessories **Net price**
 4.00" (10.16 cm) leg kit for 12CI (item# AF10LBLEGS) \$135

See page 41 for additional accessory information.




Countertop with integral ice machine

Item number	Configuration	Dispenser	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
12CI425 series ice-only dispensers										
12CI425A-SI	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	115/60/1	199 (90)	\$11,070
12CI425A-LI	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	115/60/1	199 (90)	\$11,070
C12CI425A-SI ¹	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	220/60/1	199 (90)	\$11,270
C12CI425A-LI ¹	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	220/60/1	199 (90)	\$11,270
E12CI414 series ice-only dispensers										
E12CI414A-SI ¹	Countertop	SensorSAFE	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	230/50/1	199 (90)	\$11,270
E12CI414A-LI ¹	Countertop	Lever	16.12 (40.9)	23.50 (59.7)	32.50 (82.6)	air-cooled	integral	230/50/1	199 (90)	\$11,270

¹ Models not for use in the United States.


Symphony Plus ice and water dispensers with removable ice machine – 25 and 50 series



Countertop with removable ice machine behind splash panel



Wall mount with removable ice machine behind splash panel



Freestanding with removable ice machine in base

Countertop, freestanding and wall mount ice and water dispensers with 25 lb (11.3 kg) or 50 lb (22.7 kg) of storage. Removable icemaking module uses R404a refrigerant and produces up to 425 lb (193.0 kg) of ice per day. Stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing. Wall mount models only available with SensorSAFE infrared dispensing.

For additional product information, request form# 6630 for 25CI and 50CI models, 6635 for 25HI and 50HI models, 6650 for 25FB and 50FB models, or 7090 for C25CI and C50CI models.

25 and 50 series accessories

Net price

4.00" (10.16 cm) leg kit for 25CI and 50CI (item# 00188417) \$140
 Caster kit for 25FB and 50FB (item# AFCASTERKIT) \$305

See page 41 for additional accessory information.

Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
25 series ice and water dispensers										
25CI425A-S	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	115/60/1	240 (109)	\$15,265
25CI425A-L	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	115/60/1	240 (109)	\$15,265
C25CI425A-S ¹	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	220/60/1	240 (109)	\$15,465
C25CI425A-L ¹	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	220/60/1	240 (109)	\$15,465
25CI425W-S	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	water-cooled	behind splash panel	115/60/1	240 (109)	\$15,265
25CI425W-L	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	water-cooled	behind splash panel	115/60/1	240 (109)	\$15,265
25HI425A-S0-00	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	36.50 (92.7)	air-cooled	behind splash panel	115/60/1	230 (104)	\$17,840
25HI425A-S0-DP	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	36.50 (92.7)	air-cooled	behind splash panel	115/60/1	235 (107)	\$18,830
25FB425A-S	Freestanding ³	SensorSAFE	21.00 (53.3)	24.75 (62.9)	62.88 (159.7)	air-cooled	base mounted	115/60/1	250 (113)	\$16,725
25FB425A-L	Freestanding ³	Lever	21.00 (53.3)	24.75 (62.9)	62.88 (159.7)	air-cooled	base mounted	115/60/1	250 (113)	\$16,725
25FB425W-S	Freestanding ³	SensorSAFE	21.00 (53.3)	24.75 (62.9)	62.88 (159.7)	water-cooled	base mounted	115/60/1	250 (113)	\$16,725
25FB425W-L	Freestanding ³	Lever	21.00 (53.3)	24.75 (62.9)	62.88 (159.7)	water-cooled	base mounted	115/60/1	250 (113)	\$16,725
50 series ice and water dispensers										
50CI425A-S	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	115/60/1	245 (111)	\$16,375
50CI425A-L	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	115/60/1	245 (111)	\$16,375
C50CI425A-S ¹	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	220/60/1	245 (111)	\$16,575
C50CI425A-L ¹	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	220/60/1	245 (111)	\$16,575
50CI425W-S	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	water-cooled	behind splash panel	115/60/1	245 (111)	\$16,375
50CI425W-L	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	water-cooled	behind splash panel	115/60/1	245 (111)	\$16,375
50HI425A-S0-00	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	40.50 (102.9)	air-cooled	behind splash panel	115/60/1	234 (106)	\$19,270
50HI425A-S0-DP	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	40.50 (102.9)	air-cooled	behind splash panel	115/60/1	239 (108)	\$20,080
50FB425A-S	Freestanding ³	SensorSAFE	21.00 (53.3)	24.75 (62.9)	66.88 (169.9)	air-cooled	base mounted	115/60/1	253 (115)	\$17,985
50FB425A-L	Freestanding ³	Lever	21.00 (53.3)	24.75 (62.9)	66.88 (169.9)	air-cooled	base mounted	115/60/1	253 (115)	\$17,985
50FB425W-S	Freestanding ³	SensorSAFE	21.00 (53.3)	24.75 (62.9)	66.88 (169.9)	water-cooled	base mounted	115/60/1	253 (115)	\$17,985
50FB425W-L	Freestanding ³	Lever	21.00 (53.3)	24.75 (62.9)	66.88 (169.9)	water-cooled	base mounted	115/60/1	253 (115)	\$17,985

¹ Models not for use in the United States

² 25HI425A-S0-DP and 50HI425A-S0-DP wall mount units configured with drain pan. 25HI425A-S0-00 and 50HI425A-S0-00 wall mount units configured without drain pan.

³ Freestanding models include 6.00" (15.24 cm) adjustable legs.

Symphony Plus series ice-only dispensers – 25 and 50 series

Countertop and wall mount ice dispensers with 25 lb (11.3 kg) or 50 lb (22.7 kg) of storage. Integral ice machine uses R404a refrigerant and produces up to 425 lb (193.0 kg) of ice per day. Stainless steel cabinet with accent trim. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.


For additional product information, request form# 6630 for 25CI and 50CI models, 6635 for 25HI and 50HI models, or 7090 for C25CI and C50CI models.

25 and 50 series accessories


4.00" (10.16 cm) leg kit for 25CI and 50CI (item# 00188417) \$140

Net price

See page 41 for additional accessory information.



Countertop with integral ice machine



Wall mount with integral ice machine (SensorSAFE dispensing only)

Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
25 series ice-only dispensers										
25CI425A-SI	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	115/60/1	240 (109)	\$15,265
25CI425A-LI	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	115/60/1	240 (109)	\$15,265
C25CI425A-SI ¹	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	220/60/1	240 (109)	\$15,265
C25CI425A-LI ¹	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	air-cooled	behind splash panel	220/60/1	240 (109)	\$15,265
25CI425W-SI	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	water-cooled	behind splash panel	115/60/1	240 (109)	\$15,265
25CI425W-LI	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	36.00 (91.4)	water-cooled	behind splash panel	115/60/1	240 (109)	\$15,265
25HI425A-SI-00	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	36.50 (92.7)	air-cooled	behind splash panel	115/60/1	230 (104)	\$17,840
25HI425A-SI-DP	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	36.50 (92.7)	air-cooled	behind splash panel	115/60/1	235 (107)	\$18,830
50 series ice-only dispensers										
50CI425A-SI	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	115/60/1	245 (111)	\$16,375
50CI425A-LI	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	115/60/1	245 (111)	\$16,375
C50CI425A-SI ¹	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	220/60/1	245 (111)	\$16,575
C50CI425A-LI ¹	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	air-cooled	behind splash panel	220/60/1	245 (111)	\$16,575
50CI425W-SI	Countertop	SensorSAFE	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	water-cooled	behind splash panel	115/60/1	245 (111)	\$16,375
50CI425W-LI	Countertop	Lever	21.00 (53.3)	24.00 (61.0)	40.00 (101.6)	water-cooled	behind splash panel	115/60/1	245 (111)	\$16,375
50HI425A-SI-00	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	40.50 (102.9)	air-cooled	behind splash panel	115/60/1	234 (106)	\$19,270
50HI425A-SI-DP	Wall mount ²	SensorSAFE	21.50 (54.6)	24.50 (62.2)	40.50 (102.9)	air-cooled	behind splash panel	115/60/1	239 (108)	\$20,080

¹ Models not for use in the United States.

² 25HI425A-SI-DP and 50HI425A-SI-DP wall mount units configured with drain pan and 25HI425A-SI-00 and 50HI425A-SI-00 wall mount units configured without drain pan.


Symphony Plus ice and water dispensers with removable ice machine – 110 series

Countertop and freestanding ice and water dispensers with 90 lb (40.8 kg) of storage. Removable icemaking module produces up to 425 lb (193.0 kg) of ice per day. Stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.


For additional product information, request form# 6655 for 110CT models or 6670 for 110FB models.

110 series accessories **Net price**
 Caster kit for 110FB (item# AFCASTERKIT)..... \$305

See page 41 for additional accessory information.



Countertop with top mounted removable ice machine



Freestanding with removable ice machine in base

Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
110 series ice and water dispensers										
110CT425A-S	Countertop	SensorSAFE	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	air-cooled	top mounted	115/60/1	286 (130)	\$23,740
110CT425A-L	Countertop	Lever	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	air-cooled	top mounted	115/60/1	286 (130)	\$23,740
110CT425W-S	Countertop	SensorSAFE	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	water-cooled	top mounted	115/60/1	286 (130)	\$23,740
110CT425W-L	Countertop	Lever	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	water-cooled	top mounted	115/60/1	286 (130)	\$23,740
110FB425A-S	Freestanding ¹	SensorSAFE	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	air-cooled	base mounted	115/60/1	285 (129)	\$26,170
110FB425A-L	Freestanding ¹	Lever	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	air-cooled	base mounted	115/60/1	285 (129)	\$26,170
110FB425W-S	Freestanding ¹	SensorSAFE	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	water-cooled	base mounted	115/60/1	285 (129)	\$26,170
110FB425W-L	Freestanding ¹	Lever	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	water-cooled	base mounted	115/60/1	285 (129)	\$26,170


¹ Freestanding models include 6.00" (15.24 cm) adjustable legs.

Symphony Plus manual load ice and water dispensers – 110 series

Countertop manual fill ice and water dispensers with 110 lb (49.9 kg) of storage. Stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.

For additional product information, request form# 6660.

See page 41 for additional accessory information.



Countertop, manual fill

Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
Manual fill 110 series ice and water dispensers										
110CM-NI-S ¹	Countertop	SensorSAFE	25.00 (63.5)	28.25 (71.8)	34.75 (88.3)	N/A	N/A	115/60/1	138 (63)	\$7,570
110CM-NI-L ¹	Countertop	Lever	25.00 (63.5)	28.25 (71.8)	34.75 (88.3)	N/A	N/A	115/60/1	138 (63)	\$7,570

¹ Manual fill configuration, not equipped with ice machine.


Symphony Plus ice-only dispensers – 110 series

Countertop and freestanding ice dispensers with 90 lb (40.8 kg) of storage. Models equipped with integral ice machine produce up to 425 lb (193 kg) of ice per day. Stainless steel cabinet with accent trim. Water station not included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing, integral ice machine or manual fill and countertop or freestanding.


For additional product information, request form# 6655 for CT models, 6660 for CM models, or 6670 for FB models.



Countertop with top mounted removable ice machine



Freestanding with removable ice machine in base



Countertop, manual fill

110 series accessories

Caster kit for 110FB (item# AFCASTERKIT)..... \$305

Net price

See page 41 for additional accessory information.


Item number	Configuration	Dispense	Width in (cm)	Depth in (cm)	Height in (cm)	Condenser	Ice machine location	Voltage	Approx. ship wt lb (kg)	List price
110 series ice-only dispensers										
110CT425A-SI	Countertop	SensorSAFE	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	air-cooled	top mounted	115/60/1	286 (130)	\$23,740
110CT425A-LI	Countertop	lever	25.00 (63.5)	29.00 (73.7)	53.00 (134.6)	air-cooled	top mounted	115/60/1	286 (130)	\$23,740
110FB425A-SI	Freestanding	SensorSAFE	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	air-cooled	base mounted	115/60/1	285 (129)	\$26,170
110FB425A-LI	Freestanding	lever	25.00 (63.5)	28.25 (71.8)	68.12 (173.0)	air-cooled	base mounted	115/60/1	285 (129)	\$26,170
110CM-NI-SI ¹	Countertop	SensorSAFE	25.00 (63.5)	28.25 (71.8)	34.75 (88.3)	N/A	N/A	115/60/1	138 (63)	\$7,570
110CM-NI-LI ¹	Countertop	lever	25.00 (63.5)	28.25 (71.8)	34.75 (88.3)	N/A	N/A	115/60/1	138 (63)	\$7,570

¹ Manual fill configuration, not equipped with ice machine.


Symphony Plus base stand options

Stainless steel base stand transforms Follett® countertop dispensers into freestanding dispensers. All bases include stainless steel exterior, and stainless legs with 6.00" (15.24 cm) adjustable flanged feet. Available with or without factory installed water filter system.

For additional product information, request form# 7010.



12 Series



25, 50, 110 Series

Item number	Description	Approx. ship wt lb (kg)	List price
12BASE-00	Base for 12 CI Series, 17.50" (44.4 cm) W x 22.00" (55.9 cm) D x 33.00" (83.8 cm) H	74 (34)	\$1,835
12BASE-CF	12BASE-00 with standard capacity carbon filter system (00130229) installed	86 (39)	\$2,940
12BASE-HC	12BASE-00 with high capacity carbon filter system (00978957) installed	86 (39)	\$3,155
12BASE-CL	12BASE-00 with carbonless high capacity filter system (01050442) installed	86 (39)	\$3,020
25AND50BASE-00	Base for 25 and 50 CI series, 22.75" (57.8 cm) W x 24.38" (61.9 cm) D x 33.00"	78 (35)	\$1,910
25AND50BASE-CF	25AND50BASE-00 with standard capacity carbon filter system (00130229) installed	95 (43)	\$3,020
25AND50BASE-HC	25AND50BASE-00 with high capacity carbon filter system (00978957) installed	95 (43)	\$3,250
25AND50BASE-CL	25AND50BASE-00 with carbonless high capacity filter system (01050442) installed	95 (43)	\$3,105
110BASE-00	Base for 110 CT series, 26.00" (66.0 cm) W x 29.00" (73.7 cm) D x 33.00" (83.8 cm) H	96 (44)	\$3,055
110BASE-CF	110BASE-00 with standard capacity carbon filter system (00130229) installed	107 (49)	\$4,160
110BASE-HC	110BASE-00 with high capacity carbon filter system (00978957) installed	107 (49)	\$4,390
110BASE-CL	110BASE-00 with carbonless high capacity filter system (01050442) installed	107 (49)	\$4,285

Ice and water dispenser accessories

Water treatment accessories for Symphony Plus ice and water dispensers

Item number	Description	Net price
Follett bacterial-retentive filter system		
01233659	Bacterial-retentive filter system	\$555
01244615	Replacement filter kit for bacterial-retentive filter system	\$230
01233717	1 micron absolute rated pre-filter cartridge	\$50
01288034	Scale inhibitor pre-filter kit for bacterial-retentive filter system	\$195
01288042	Carbon with scale inhibitor pre-filter kit for bacterial-retentive filter system	\$195
01288067	Replacement filter for scale inhibitor pre-filter kit	\$75
01288059	Replacement filter for carbon and scale inhibitor pre-filter kit	\$75
Carbonless high capacity filter system		
01050442	Carbonless high capacity water filter system (one per ice machine)	\$560
01050426	Carbonless high capacity water filter cartridge – primary, single	\$135
01050434	Carbonless high capacity water filter cartridge – primary, carton of 6	\$645
00130211	Water pre-filter cartridge – pre-filter, single	\$45
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$190
Standard capacity carbon filter system		
00130229	Water filter system (one per ice machine)	\$525
00130245	Water filter cartridge – primary, single	\$120
00954297	Water filter cartridge – primary, carton of 6	\$550
00130211	Water pre-filter cartridge – pre-filter, single	\$45
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$190
High capacity carbon filter system		
00978957	High capacity water filter system (one per ice machine)	\$630
00978965	High capacity water filter cartridge – primary, single	\$215
00978973	High capacity water filter cartridge – primary, carton of 6	\$1,065
00130211	Water pre-filter cartridge – pre-filter, single	\$45
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$190

Cleaning and sanitizing accessories for Symphony Plus ice and water dispensers

Item number	Description	Net price
01089572	Pressurized water sanitizing kit for use with Follett dispensers that have a Follett water filtration system ¹ (includes dip tube and bypass plug)	\$55
01089580	Pressurized water sanitizing kit for use with Follett dispensers that do not have a Follett water filtration system (includes filter housing, dip tube and bypass plug)	\$115
01147826	SafeCLEAN Plus™, liquid – environmentally responsible ice machine cleaner (1 x 8 oz bottle)	\$30
01149954	SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (6 x 8 oz bottles)	\$80
01149962	SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (carton of 24 x 8 oz bottles)	\$245
00979674	Nu-Calgon® IMS-III sanitizer, single 16 oz bottle	\$30
01038652	Nu-Calgon IMS-III sanitizer, case of 12 x 16 oz bottles	\$185
01075431	SaniSponge™, 24 pack of sanitary sponges	\$55

¹ Applicable Follett water filter systems include 00130229, 00978957, 01050442

Other accessories for Symphony Plus ice and water dispensers

01049790	Symphony Plus external drain kit (includes 10 ft (3 m) clear tubing and fitting)	\$60
AFCONDPUMP	Condensate pump	\$275

Replacement ice machine for use in existing Symphony and Symphony Plus dispensers

Item number	Width in (cm)	Depth in (cm)	Height in (cm)	Production per 24 hr lb (kg)	Condenser	Voltage	Ship wt lb (kg)	List price
R425A	18.84 (47.9)	20.00 (50.8)	17.00 (43.2)	400 (181)	air-cooled	115/60/1	127 (58)	\$10,650
R425W	18.84 (47.9)	22.06 (56.0)	17.00 (43.2)	400 (181)	water-cooled	115/60/1	127 (58)	\$10,650
P425A	15.30 (38.9)	19.90 (50.5)	16.80 (42.7)	425 (193)	air-cooled	115/60/1	117 (53)	\$10,155
CP425A	15.30 (38.9)	19.90 (50.5)	16.80 (42.7)	425 (193)	air-cooled	220/60/1	117 (53)	\$10,355
P425W	15.30 (38.9)	19.90 (50.5)	16.80 (42.7)	425 (193)	water-cooled	115/60/1	122 (55)	\$10,155
CP425W	15.30 (38.9)	19.90 (50.5)	16.80 (42.7)	425 (193)	water-cooled	220/60/1	122 (55)	\$10,355

Refer to matrix below for correct replacement ice machine.

Replacement ice machine ordering matrix

Dispenser series	Replacement ice machine item number	Ice machine panel finish
Countertop and wall mount dispensers with top mounted ice machines		
25CT400A, 25HT400A, 50CT400A, 50HT400A	P425A	no panels
25CT400W, 25HT400W, 50CT400W, 50HT400W	P425W	no panels
110CT400A	P425A	no panels
110CT425A	P425A	no panels
110CT400W	P425W	no panels
110CT425W	P425W	no panels
Countertop and wall mount dispensers with ice machine behind front splash panel		
25CI400A, 50CI400A, 25HI400A, 50HI400A	P425A	no panels
25CI400W, 50CI400W	P425W	no panels
25CI425A, 50CI425A, 25HI425A, 50HI425A	P425A	no panels
25CI425W, 50CI425W	P425W	no panels
Countertop and wall mount dispensers with RIDE model ice machines		
C25R5A, H25R5A, C50R5A, H50R5A	R425A	stainless
C25R5W, H25R5W, C50R5W, H50R5W	R425W	stainless
25CR400A, 25HR400A, 50CR400A, 50HR400A	R425A	stainless
25CR400W, 25HR400W, 50CR400W, 50HR400W	R425W	stainless
25CR425A, 25HR425A, 50CR425A, 50HR425A	R425A	stainless
25CR425W, 25HR425W, 50CR425W, 50HR425W	R425W	stainless
C110R5A	R425A	stainless
C110R5W	R425W	stainless
110CR400A	R425A	stainless
110CR400W	R425W	stainless
110CR425A	R425A	stainless
110CR425W	R425W	stainless
Freestanding dispensers with ice machine in base		
25FB400A, 50FB400A	P425A	no panels
25FB400W, 50FB400W	P425W	no panels
25FB425A, 50FB425A	P425A	no panels
25FB425W, 50FB425W	P425W	no panels
110FB400A	P425A	no panels
110FB400W	P425W	no panels
110FB425A	P425A	no panels
110FB425W	P425W	no panels

Ice machines

Compact, reliable Chewblet® extruded ice and flake ice machines in a variety of sizes to meet your needs. Choose from top mount or RIDE model configurations (extruded only).

Warranty

Maestro Plus™ and Horizon Elite™ series ice machines

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 3 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 3 year period are covered under this warranty. For products sold outside of the U.S., the labor warranty will apply only to equipment sold and serviced through a Follett Authorized Distributor in its designated territory.

The compressor shall be covered for an additional 2 years (parts only), for a total of 5 years from the date of installation.

WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett.
- Customer has documented record of preventive maintenance and cleaning of the machine every 6 months according to the instructions in the dispenser Installation, Operations and Service Manual.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond the control of Follett are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective upon examination.
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.

This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship.

Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.


Maestro Plus ice machine bins – 400 series

Flake (UF) or Micro Chewblet™ (UM) ice machines with 75 lb (34 kg) of bin storage for undercounter or freestanding applications.

Ice machines use R290a refrigerant. Stainless steel exterior with moderate production and storage capacity in a small footprint.

For additional product information, request form# 1005 for UFD and UMD models or 1006 for UFE and UME models.

See page 52 for additional accessory information.



undercounter ice machine bin

Item number	Width in (cm)	Depth in (cm)	Height ² in (cm)	Production capacity lb (kg)		Condensing unit ³	Voltage	Approx. ship wt lb (kg)	List price
				90 F air 70 F water (32/21 C)	70 F air 50 F water (21/10 C)				
UFD414A80	23.50 (59.7)	26.00 (66.0)	33.00 (83.8)	325 (148)	425 (193)	A – SC	115/60/1	194 (88)	\$12,525
UFE414A80 ¹	23.50 (59.7)	26.00 (66.0)	33.00 (83.8)	325 (148)	425 (193)	A – SC	230/50/1 ¹	194 (88)	\$12,725
UMD414A80 ¹	23.50 (59.7)	26.00 (66.0)	33.00 (83.8)	325 (148)	425 (193)	A – SC	115/60/1	194 (88)	\$12,525
UME414A80 ¹	23.50 (59.7)	26.00 (66.0)	33.00 (83.8)	325 (148)	425 (193)	A – SC	230/50/1 ¹	194 (88)	\$12,725

[†] ENERGY STAR® certified.

¹ Models not for use in the United States.

² 33.00" (83.8 cm) with leveling feet for undercounter use. 39.00" (99.1 cm) with bullet legs for freestanding application.

³ Condensing unit: A – SC = Air – self-contained

Ice Machine Model Number Configurations

MC D 425 A B T

Ice machine	Voltage	Series	Condenser	Application	Configuration
MC Maestro Plus Chewblet (414/425)	C 208-230/60/1 (icemaking head) <i>Self-contained only.</i>	400 up to (414/425) 425 lb (193 kg)	A Air-cooled, self-contained W Water-cooled, self-contained	H Harmony™ (Countertop ice and beverage dispenser)	S RIDE® (remote ice delivery equipment)
MF Maestro Plus Flake (414/425)	D 115/60/1 (icemaking head) <i>Self-contained and remote. If remote unit, outdoor condensing unit is 208-230/60/1.</i>	710 up to 759 lb (345 kg)		B Ice storage bin	T Top-mount
HC Horizon Elite Chewblet (710)	E 230/50/1 (icemaking head) <i>Self-contained only.</i>				
HM Horizon Elite Micro Chewblet† (710)					

† Micro Chewblet™ – For smaller Chewblet ice (approximately 3/8" long), replace second character of Horizon Elite model number with "M". Example HCD710ABS becomes HMD710ABS. Add \$235 to list price.


Maestro Plus flake ice machines for ice storage bins – 400 series

Flake ice machines for top mount on ice storage bins.

MFD425 and MFC425 models use R404a refrigerant. MFE414 models use R290a refrigerant. MFC425 and MFE414 models are not for use in the United States.

For additional product information, request form# 7015 for MFD425 models, 6950 or 6955 for MFC425 models or 1003 for MFE414 models.

See page 52 for additional accessory information.



Top mount

Item number	Configuration	Width in (cm)	Depth in (cm)	Height in (cm)	Production capacity lb (kg)		Condensing unit ¹	Voltage	Approx. ship wt lb (kg)	List price
					90 F air 70 F water (32/21 C)	70 F air 50 F water (21/10 C)				
425 series										
MFD425ABT	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	115/60/1	170 (77)	\$10,520
MFC425ABT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	220/60/1	170 (77)	\$10,720
MFD425WBT	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W – SC	115/60/1	170 (77)	\$10,520
MFC425WBT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W – SC	220/60/1	170 (77)	\$10,720
414 series										
MFE414ABT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	230/50/1	170 (77)	\$10,720

¹ Condensing unit: A – SC = Air – self-contained W – SC = Water – self-contained

² Models not for use in the United States.

Maestro Plus Chewblet ice machines for ice storage bins – 400 series

Ice machines for top mount or RIDE (ice-through-a-tube) configurations.

MCD425 and MCC425 models use R404a refrigerant. MCE414 and MME414 models use R290a refrigerant. MCC425 and MCE414 models are not for use in the United States.

RIDE ice machines include 10' (3 m) of insulated ice transport tube. Factory approval required for lengths over 20' (6.1 m).

For additional product information, request form# 6690 or 6695 for MCD models or 1001, 1002 or 1003 for MCE and MCC models.

Refer to page 53 of the price list for capacities and sizes of bins available.

See page 52 for additional accessory information.



Top mount



RIDE model

Item number	Configuration	Width in (cm)	Depth in (cm)	Height in (cm)	Production capacity lb (kg)		Condensing unit ¹	Voltage	Approx. ship wt lb (kg)	List price
					90 F air 70 F water (32/21 C)	70 F air 50 F water (21/10 C)				
425 series										
MCD425ABT [†]	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	115/60/1	170 (77)	\$10,520
MCD425ABS [†]	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	115/60/1	170 (77)	\$11,320
MCC425ABT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	220/60/1 ²	170 (77)	\$10,720
MCC425ABS ²	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	220/60/1 ²	170 (77)	\$11,520
MMC425ABT ^{2,3}	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	220/60/1 ²	170 (77)	\$10,955
MMC425ABS ^{2,3}	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	220/60/1 ²	170 (77)	\$11,755
MCD425WBT	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W – SC	115/60/1	170 (77)	\$10,520
MCD425WBS	RIDE	18.80 (47.8)	20.75 (52.7)	17.10 (43.4)	408 (185)	486 (221)	W – SC	115/60/1	170 (77)	\$11,320
MCC425WBT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W – SC	220/60/1 ²	170 (77)	\$10,720
MCC425WBS ²	RIDE	18.80 (47.8)	20.75 (52.7)	17.10 (43.4)	408 (185)	486 (221)	W – SC	220/60/1 ²	170 (77)	\$11,520
MMC425WBT ^{2,3}	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W – SC	220/60/1 ²	170 (77)	\$10,955
MMC425WBS ^{2,3}	RIDE	18.80 (47.8)	20.75 (52.7)	17.10 (43.4)	408 (185)	486 (221)	W – SC	220/60/1 ²	170 (77)	\$11,755
414 series										
MCE414ABT ²	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	230/50/1 ²	170 (77)	\$10,720
MCE414ABS ²	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	230/50/1 ²	170 (77)	\$11,520
MME414ABT ^{2,3}	Top mount	22.70 (57.7)	24.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	230/50/1 ²	170 (77)	\$10,955

[†] ENERGY STAR[®] certified.

¹ Condensing unit: A – SC = Air – self-contained W – SC = Water – self-contained

² Models not for use in the United States.

³ Produces Micro Chewblet ice approximately 3/8" long.

Maestro Plus Chewblet ice machines for countertop ice and beverage dispensers – 400 series

Ice machines for top mount or RIDE (ice-through-a-tube) configurations.

MCD425 and MCC425 models use R404a refrigerant. MCE414 models use R290a refrigerant. MCC425 and MCE414 models are not for use in the United States.


Top mount ice machine **requires stainless steel top kit**, sold separately. See top kit charts on page 48 for top kit numbers.

RIDE ice machines include 10' (3 m) of insulated ice transport tube and universal RIDE model adapter kit (item# 01054444). Factory approval required for ice transport tube lengths over 20' (6.1 m). See page 48 for approved dispensers.

All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required.

For additional product information, request form# 7015 for MCD425 models, 6945, 6950 or 6955 for MCC425 models or 1001, 1002 or 1003 for MCE414 models.

See page 52 for additional accessory information.

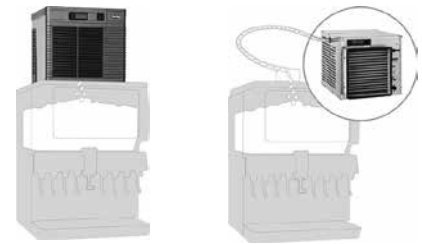

Top mount

RIDE model

Item number	Configuration	Width in (cm)	Depth in (cm)	Height in (cm)	Production capacity lb (kg)		Condensing unit ¹	Voltage	Approx. ship wt lb (kg)	List price
					90 F air 70 F water (32/21 C)	70 F air 50 F water (21/10 C)				
425 series										
MCD425AHT [†]	Top mount	22.70 (57.7)	22.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	115/60/1	170 (77)	\$10,520
MCD425AHS [†]	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	115/60/1	170 (77)	\$11,320
MCC425AHT ²	Top mount	22.70 (57.7)	22.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	220/60/1 ²	170 (77)	\$10,720
MCC425AHS ²	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	220/60/1 ²	170 (77)	\$11,520
MCD425WHT	Top mount	22.70 (57.7)	22.25 (61.6)	21.25 (54.0)	408 (185)	486 (221)	W – SC	115/60/1	170 (77)	\$10,520
MCD425WHS	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	408 (185)	486 (221)	W – SC	115/60/1	170 (77)	\$11,320
414 series										
MCE414AHT ²	Top mount	22.70 (57.7)	22.25 (61.6)	21.25 (54.0)	325 (148)	425 (193)	A – SC	230/50/1 ²	170 (77)	\$10,720
MCE414AHS ²	RIDE	18.80 (47.8)	22.75 (57.8)	17.10 (43.4)	325 (148)	425 (193)	A – SC	230/50/1 ²	170 (77)	\$11,520

[†] ENERGY STAR[®] certified.

¹ Condensing unit: A – SC = Air – self-contained W – SC = Water – self-contained.

² Models not for use in the United States.

Approved for RIDE model – ice and beverage dispensers manufactured by others¹

Coca-Cola Freestyle 7000 ^{2,4} / 7100 ^{3,4} / 9000 ⁴ / 9100 ⁴	Lancer 4500-22N	Servend MD175
Cornelius DB/DF/ED150BC Series	Lancer 4500-30N	Servend MD200
Cornelius DB/DF/ED175BC Series	Lancer FS-16N	Servend MD250
Cornelius DB/DF/ED200BC Series	Lancer FS-22N	Servend MDH302
Cornelius DB/DF/ED250BC Series	Lancer FS-30N	Servend MDH402
Cornelius DB/DF/ED300BC Series	Lancer FS-44N	Servend SV175
Cornelius IDC215/255 and Pro Fast Gate	Lancer Sensation and TouchPoint	Servend SV200
Cornelius IDC Pro	Pepsi Spire 3.0 ⁵ / 5.0 ⁵ / 4.1 ⁵	Servend SV250
Cornelius Flavor Fusion/Overload	Servend MD150	

Top kits for top mount model Maestro Plus 400 series ice machines used with countertop ice and beverage dispensers

Top kit accessory item number	Ice machine model	Dispenser	Dispenser model number	Dispenser series width	List price	Specification sheet form number
Maestro Plus top mount applications¹						
MTF24SCP ^{4,6}	MCD425AHT	Coca-Cola	Freestyle 9000	24"	\$910	6690
MTF26SCP ⁴	MCD425AHT	Coca-Cola	Freestyle 9100	26"	\$910	6690
MTF30SCP ^{4,7}	MCD425AHT	Coca-Cola	Freestyle 7000	30"	\$1,100	6690
MTF30SCP ^{4,8}	MCD425AHT	Coca-Cola	Freestyle 7100	30"	\$1,100	6690
MTC22SCP	MCD425AHT	Cornelius	DB/DF/ED150BC	22"	\$905	6690
MTC24SCP	MCD425AHT	Cornelius	DB/DF/ED175BC	24"	\$905	6690
MTC30SCP	MCD425AHT	Cornelius	DB/DF/ED200/250	30"	\$1,100	6690
MTL22SCP	MCD425AHT	Lancer	FS-22N/4500-22N	22"	\$895	6690
MTL30SCP	MCD425AHT	Lancer	4500-30N	30"	\$1,100	6690
MTL30SCP-STP	MCD425AHT	Lancer	Sensation/TouchPoint	30"	\$1,100	6690
MTP24SCP	MCD425AHT	Pepsi	Spire 3.0	24"	\$905	6690
MTP30SCP	MCD425AHT	Pepsi	Spire 5.0 / 4.1	30"	\$1,100	6690

Top kits for RIDE model Maestro Plus and Horizon Elite series ice machines for use with countertop ice and beverage dispensers

Top kit accessory item number	Ice machine model	Dispenser	Dispenser model number	Dispenser series width	List price
Required Maestro Plus series RIDE model stainless steel adapter kits¹					
MSF30SC ^{2,4}	Available for all models that end in HS.	Coca-Cola	Freestyle 7000	30"	\$540
MSF26SC ⁴		Coca-Cola	Freestyle 9100	26"	\$510
MSP24SC ⁵	Example: MCD425AHS MCE414AHS	Pepsi	Spire 3.0	24"	\$510
MSP30SC ⁵		Pepsi	Spire 5.0 / 4.1	30"	\$540

Optional Maestro Plus and Horizon Elite series RIDE model stainless steel adapter kits¹

MSC22SC	Available for all models that end in HS.	Cornelius	DB/DF/ED150BC	22"	\$2,185
MSC24SC		Cornelius	DB/DF/ED175BC	24"	\$2,285
MSC30SC		Cornelius	DB/DF/ED200BC	30"	\$2,385
MSC30SC		Cornelius	DB/DF/ED250BC	30"	\$2,385
MSC44SC	Example: MCD425AHS MCE414AHS HCD710AHS	Cornelius	DB/DF/ED300BC	44"	\$2,435
MSL22SC		Lancer	FS-22N	22"	\$2,185
MSL30SC		Lancer	4500-30N	30"	\$2,385
MSL30SC		Lancer	FS-30N	30"	\$2,385

¹ All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required. Approved dispensers for top mount ice machine applications are listed above.

² Top kit MSF30SC required with Coca-Cola Freestyle 7000. Top adapter IC Code 46412 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

³ Top kit MSF30SC required with Coca-Cola Freestyle 7100. Top adapter IC Code 46751 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁴ Consult with Coca-Cola and Follett to qualify application prior to ordering.

⁵ RIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

⁶ Adapter must also be ordered from Coca-Cola. IC Code: 46010 (Silver), 46011 (Red) or 46012 (Black).

⁷ Top adapter IC Code 46412 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁸ Top adapter IC Code 46753 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

Horizon Elite Chewblet ice machines for ice storage bins – 710 series

Ice machines for top mount or RIDE (ice-through-a-tube) configurations.


RIDE ice machines include 10' (3 m) of insulated ice transport tube. For additional tube lengths, see page 50. Maximum run length of ice transport tube is 75' (22.8 m).

Micro Chewblet ice – For smaller Chewblet ice (approximately 3/8" long), replace second character of Horizon Elite number with "M". Example HCD710ABT becomes HMD710ABT. Add \$235 to list price.

For additional product information, request form# 8225.

Refer to page 54 of the price list for capacities and sizes of bins available.

See page 52 for additional accessory information.

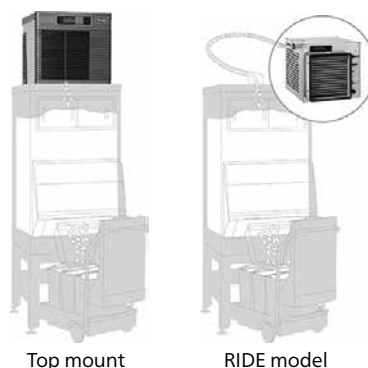

Top mount

RIDE model

Item number	Configuration	Width in (cm)	Depth in (cm)	Height in (cm)	Production capacity lb (kg)		Condensing unit ¹	Voltage	Approx. ship wt lb (kg)	List price
					90 F air 70 F water (32/21 C)	70 F air 50 F water (21/10 C)				
710 series										
HCD710ABT [†]	Top mount	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	115/60/1	190 (87)	\$14,410
HCD710ABS [†]	RIDE	22.70 (57.7)	24.50(62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	115/60/1	190 (87)	\$15,210
HCE710ABT ²	Top mount	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	230/50/1 ²	190 (87)	\$14,610
HCE710ABS ²	RIDE	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	230/50/1 ²	190 (87)	\$15,410

[†] ENERGY STAR[®] certified.

¹ Condensing unit: A – SC = Air – self-contained

² Models not for use in the United States.

Horizon Elite Chewblet ice machines for countertop ice and beverage dispensers – 710 series

Top mount ice machines **require stainless steel top kit**, sold separately. See top kit charts on page 50.


RIDE ice machines that automatically fill countertop ice and beverage dispensers, **no stainless steel top required***. All parts required for installation are included with the ice machine. Refer to specification sheet, form# 8225, for approved applications. See page 51 for approved dispensers.

RIDE rice machines include 10' (3 m) of insulated ice transport tube. For additional tube lengths, see page 50. Maximum run length of ice transport tube is 75' (22.8 m).

All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required.

Micro Chewblet ice – For smaller Chewblet ice (approximately 3/8" long), replace second character of Horizon Elite number with "M". Example HCD710AHT becomes HMD710AHT. Add \$235 to list price.

For additional product information, request form# 8225

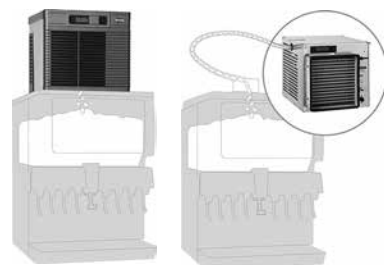

Top mount

RIDE model

Accessory for models ending in HS and HT	Net price
Sleep cycle kit for improved energy efficiency and component life	\$100

See page 52 for additional accessory information.

Item number	Configuration	Width in (cm)	Depth in (cm)	Height in (cm)	Production capacity lb (kg)		Condensing unit ¹	Voltage	Approx. ship wt lb (kg)	List price
					90 F air 70 F water (32/21 C)	70 F air 50 F water (21/10 C)				
710 series										
HCD710AHT [†]	Top mount	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	115/60/1	190 (87)	\$14,410
HCD710AHS [†]	RIDE	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	115/60/1	190 (87)	\$15,210
HCE710AHT ²	Top mount	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	230/50/1 ²	190 (87)	\$14,610
HCE710AHS ²	RIDE	22.70 (57.7)	24.50 (62.2)	21.25 (54.0)	586 (266)	759 (345)	A – SC	230/50/1 ²	190 (87)	\$15,410

[†] ENERGY STAR[®] certified.

* Coca-Cola Freestyle and Pepsi Spire 3.0 and 5.0 require top kit, see "Top kits for Horizon Elite 710 series ice machines for use with countertop ice and beverage dispensers" on page 51.

¹ Condensing unit: A – SC = Air – self-contained

² Models not for use in the United States.

Approved for RIDE model – ice and beverage dispensers manufactured by others¹

Coca-Cola Freestyle 7000 ² / 7100 ^{2,3} / 9000 ² / 9100 ²	Follett Symphony Plus™ 110CM	Pepsi Spire 3.0 ⁴ / 5.0 ⁴ / 4.1 ⁴	Servend SV250
Cornelius DB/DF/ED150BC Series	Lancer 4500-22N		Servend MD150
Cornelius DB/DF/ED175BC Series	Lancer 4500-30N		Servend MD175
Cornelius DB/DF/ED200BC Series	Lancer FS-16N		Servend MD200
Cornelius DB/DF/ED250BC Series	Lancer FS-22N		Servend MD250
Cornelius DB/DF/ED300BC Series	Lancer FS-30N		Servend MDH302
Cornelius IDC215/255 and Pro Fast Gate	Lancer FS-44N		Servend MDH402
Cornelius IDC Pro	Lancer Sensation/TouchPoint		Servend SV175
Cornelius Flavor Fusion/Overload	Lancer Bevariety		Servend SV200

¹ All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required. See table below for table of approved dispensers for top mount ice machines.

² Consult with Coca-Cola and Follett to qualify application prior to ordering.

³ Top kit MSF30SC required with Coca-Cola Freestyle 7100. Top adapter IC Code 46751 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁴ RIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

Top kits for Horizon Elite 710 RIDE ice machines for use with countertop ice and beverage dispensers

Top kit accessory item number	Ice machine model	Dispenser	Dispenser model number	Dispenser series width	List price
Required Horizon Elite series RIDE model stainless steel adapter kits¹					
HSF26SC ²	Available for all models that end in HS.	Coca-Cola	Freestyle 9100	26"	\$540
MSP24SC ³		Pepsi	Spire 3.0	24"	\$510
MSP30SC ³	Example: HCC1010AHS	Pepsi	Spire 5.0	30"	\$540

¹ All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required. See table below for table of approved dispensers for top mount ice machines.

² Consult with Coca-Cola and Follett to qualify application prior to ordering.

³ RIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

Ice transport tube

Insulated polywire transport tube for RIDE ice machine installations requiring more than the standard 10' (3 m) length.

Item number	Description	Net price
01252477	Ice transport tube kit, 15 ft (4.6 m)	\$160
01252485	Ice transport tube kit, 20 ft (6.1 m)	\$325
01252493	Ice transport tube kit, 30 ft (9.2 m)	\$645
01252501	Ice transport tube kit, 40 ft (12.2 m)	\$965
01252519	Ice transport tube kit, 50 ft (15.3 m)	\$1,285
01252527	Ice transport tube kit, 60 ft (18.3 m)	\$1,610
01413053	Ice transport tube kit, 75 ft (22.9 m)	\$1,930
01252543	Ice transport tube kit, 100 ft (30.5 m)	\$2,895

Top kits for Horizon Elite 710 series ice machines for use with countertop ice and beverage dispensers

Top kit accessory item number	Ice machine model series	Dispenser manufacturer	Dispenser model number	Dispenser series width	Installation orientation – Front or Back ¹	List price	Specification sheet form number
Horizon top mount applications – 22 - 44 inch dispensers²							
H22F24-F ^{3,4}	710A	Coca-Cola	Freestyle 9000	24"	F only	\$950	8225
H22F26-F ³	710A	Coca-Cola	Freestyle 9100	26"	F only	\$950	8225
H22F30-F ^{3,5}	710A	Coca-Cola	Freestyle 7000	30"	F only	\$1,150	8225
H22F30-F ^{3,7}	710A	Coca-Cola	Freestyle 7100	30"	F only	\$1,150	8225
H22C22-F	710A	Cornelius	DB/DF/ED150 series	22"	F only	\$935	8225
H22C24-F	710A	Cornelius	DB/DF/ED175 series	24.5"	F only	\$950	8225
H22C30-F	710A	Cornelius	DB/DF/ED200 series	30"	F only	\$1,150	8225
H22C30-X ⁸	710A	Cornelius	DB/DF/ED200 series	30"	F and B	\$1,065	8225
H22C30-F	710A	Cornelius	DB/DF/ED250 series	30"	F only	\$1,150	8225
H22C30-X ⁸	710A	Cornelius	DB/DF/ED250 series	30"	F and B	\$1,065	8225
H22C30-F-FF	710A	Cornelius	Flavor Fusion/Overload	30"	F only	\$1,525	8225
H22C30-F-IDC	710A	Cornelius	IDC 215/255 and Pro Fast Gate	30"	F only	\$1,525	8225
H22C30-X-PRO	710A	Cornelius	IDC Pro	30"	F and B	\$770	8225
H22C44- _	710A	Cornelius	DB/DF/ED300 series	44"	F or B	\$1,320	8225
H22L22-F	710A	Lancer	FS-22N	22"	F only	\$935	8225
H22L30-F	710A	Lancer	4500-30N	30"	F only	\$1,150	8225
H22L30-F	710A	Lancer	FS-30N	30"	F only	\$1,150	8225
H22L30-F-STP	710A	Lancer	Bevariety	30"	F only	\$1,150	8225
H22L30-F-STP	710A	Lancer	30" Sensation/Touchpoint	30"	F only	\$1,150	8225
H22L44-F-STP	710A	Lancer	44" Sensation	44"	F only	\$1,150	8225
H22P24-F ⁹	710A	Pepsi	Spire 3.0	24"	F only	\$950	8225
H22P30-F ⁹	710A	Pepsi	Spire 5.0 / 4.1	30"	F only	\$1,150	8225
H22S30-F	710A	Servend	SV200	30"	F only	\$1,065	8225
H22S44- _	710A	Servend	MDH-302	44"	F or B	\$1,320	8225
H22S60- _	710A	Servend	MDH-402	60"	DF, DB	\$1,590	8225
H22S60- _	710A	Servend	MDH-402	60"	RF, LF, RB, LB	\$1,150	8225

¹ Installation orientations available:

DF – 2 front facing Horizon Elite ice machines

LF – 1 Horizon Elite ice machine - left side - front facing

RF – 1 Horizon Elite ice machine - right side - front facing

DB – 2 back facing Horizon Elite ice machines

LB – 1 Horizon Elite ice machine - left side - back facing

RF – 1 Horizon Elite ice machine - right side - front facing

DB – 2 back facing Horizon Elite ice machines

LB – 1 Horizon Elite ice machine - left side - back facing

Note: For any other installation orientations, contact factory.

² All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required.

³ Consult with Coca-Cola and Follett to qualify application prior to ordering.

⁴ Adapter must also be ordered from Coca-Cola. IC Code: 46010 (Silver), 46011 (Red) or 46012 (Black).

⁵ Top adapter IC Code 46412 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁶ Top adapter IC Code 46753 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁷ Top adapter IC Code 46751 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁸ Top designed with flexibility to accommodate front or back mounting.

⁹ RIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

Ice machine accessories

Water treatment accessories for ice machines

Item number	Description	Net price
Follett bacterial-retentive filter system		
01233659	Bacterial-retentive filter system	\$555
01244615	Replacement filter kit for bacterial-retentive filter system	\$230
01233717	1 micron absolute rated pre-filter cartridge	\$50
01288034	Scale inhibitor pre-filter kit for bacterial-retentive filter system	\$195
01288042	Carbon with scale inhibitor pre-filter kit for bacterial-retentive filter system	\$195
01288067	Replacement filter for scale inhibitor pre-filter kit	\$75
01288059	Replacement filter for carbon and scale inhibitor pre-filter kit	\$75

Carbonless high capacity filter system		
01050442	Carbonless high capacity water filter system (one per ice machine) – Horizon Elite and Maestro Plus series ice machines	\$560
01050426	Carbonless high capacity water filter cartridge – primary, single	\$135
01050434	Carbonless high capacity water filter cartridge – primary, carton of 6	\$645
00130211	Water pre-filter cartridge – pre-filter, single	\$45
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$190

Standard capacity carbon filter system		
00130229	Water filter system (one per ice machine) – Maestro Plus series ice machines	\$525
00130245	Water filter cartridge – primary, single	\$120
00954297	Water filter cartridge – primary, carton of 6	\$550
00130211	Water pre-filter cartridge – pre-filter, single	\$45
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$190

High capacity carbon filter system		
00978957	High capacity water filter system (one per ice machine) – Horizon Elite series ice machines	\$630
00978965	High capacity water filter cartridge – primary, single	\$215
00978973	High capacity water filter cartridge – primary, carton of 6	\$1,065
00130211	Water pre-filter cartridge – pre-filter, single	\$45
00954305	Water pre-filter cartridge – pre-filter, carton of 12	\$190

Cleaning and sanitizing accessories for ice machines		
Item number	Description	Net price
01147826	SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (1 x 8 oz bottle)	\$30
01149954	SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (6 x 8 oz bottles)	\$80
01149962	SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (carton of 24 x 8 oz bottles)	\$245
00979674	Nu-Calgon IMS-III sanitizer, single 16 oz bottle	\$30
01038652	Nu-Calgon IMS-III sanitizer, case of 12 x 16 oz bottles	\$185

Other accessories for ice machines

Item number	Description	Net price
01068477	Slide-out ice machine accessory for air- and water-cooled ice machines (Harmony applications only) – allows air- and water-cooled RIDE model Maestro Plus 425 series ice machine to slide-out without disconnecting utilities	\$680
AFWALLMTBRKT	Wall mount bracket for Maestro Plus 425 series RIDE model ice machines	\$240
00997098	Wall mount bracket for Horizon Elite 710 series RIDE model ice machines	\$325
AFR400STND	Ice machine stand for Maestro Plus 425A/W series – height adjustable from 6.80" (17.27 cm) to 8.30" (21.08 cm)	\$500
00997080	Ice machine stand for Horizon Elite 710 series – height adjustable from 6.80" (17.27 cm) to 8.30" (21.08 cm)	\$505

Item number	Description	List price
Micro Chewblet ice	For smaller Chewblet ice (approx. 3/8" long), replace second character of Horizon model numbers with "M". Example: HCD710ABS becomes HMD710ABS.	\$235

Ice storage, ice transport and ice handling

Follett offers ice storage, dispensing and transport solutions in capacities and sizes to meet nearly every need. All with features that can make your ice management easier, safer, and more sanitary than you ever thought possible. Please visit www.follettice.com for more bin models than listed here.

Warranty

Slope front bins

Follett Products, LLC warrants to the original end user that the cabinet exterior, including the top and trim, and the interior liner will be free of corrosion for 3 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for corrosion repair within this 3 year period are covered under this warranty.

All other integral components are covered against defects in material and workmanship under normal use and service for 2 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 2 year period are covered under this warranty. For products sold outside of the U.S., the labor warranty will apply only to equipment sold and serviced through a Follett Authorized Distributor in its designated territory.

Removal of ice machine to service bin and any labor costs incurred are expressly excluded from this warranty.

WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett. All 3rd party ice machines must be installed and operated in accordance with the manufacturer's instructions.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond Follett's control are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective upon examination.
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.


This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship.

Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.

Slope front bins

Small to medium capacity ice storage bins. Bin exterior for all models includes stainless steel front and sides. Bin interior includes polyethylene-lined walls and stainless steel bottom. All bins include stainless top, which is custom cut for ice machine(s) and 6.00" (15.24 cm) plastic adjustable legs.

For additional product information, request form# 9135.



Slope front bin

Item number †	Max. bin cap. lb (kg)	Width in (cm)	Depth in (cm)	Height w/ legs in (cm)	Req'd door access in (cm)	Approx. ship wt lb (kg)	List price
300-22 ¹	300 (136)	22.00 (55.9)	31.50 (80.0)	40.00 (101.6)	23.00 (58.4)	120 (54)	\$3,085
425-30	430 (195)	30.00 (76.2)	31.50 (80.0)	40.00 (101.6)	31.00 (78.7)	144 (65)	\$4,290
650-44	660 (299)	44.00 (111.8)	31.50 (80.0)	40.00 (101.6)	32.00 (81.2)	178 (81)	\$5,930
950-48	950 (431)	48.00 (121.9)	31.50 (80.0)	50.00 (127.0)	32.00 (81.2)	207 (94)	\$6,080
1025-52	1030 (467)	52.00 (132.1)	31.50 (80.0)	50.00 (127.0)	32.00 (81.2)	217 (98)	\$6,245

† Purchase orders must clearly indicate the make and model of the ice machine(s) being used with the bin to properly prepare the bin top. Lack of this information will result in a delay in order processing.

¹ Model 300-22 only for use with Follett® Maestro Plus 425 and Horizon Elite 710 series ice machines. Additional bin types available. Contact factory.

Replacement stainless steel tops for slope front bins

Order must include complete model number of ice machine to be used in conjunction with bin.

Bin model	Width in (cm)	Depth (at top) in (cm)	Replacement top item number	Approx. ship wt lb (kg)	Net price
425-30	30.00 (76.2)	27.50 (69.8)	AB425TOP00	36 (16)	\$535
650-44	44.00 (111.8)	27.50 (69.8)	AB650TOP00	45 (20)	\$725
950-48	48.00 (121.9)	27.50 (69.8)	AB725TOP00	70 (32)	\$795
1025-52	52.00 (132.1)	27.50 (69.8)	AB750TOP00	72 (33)	\$845

Incoterms is a trademark of the International Chamber of Commerce.
ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency.
Pyxis is a registered trademark of CareFusion in the United States and other countries.
Omnicell is a registered trademark of Omnicell, Inc. in the United States.
medDISPENSE is a registered trademark of InterMetro Industries Corp. in the United States and other countries.
EDGE SERIES, HORIZON ELITE, INFINITY SERIES, MAESTRO PLUS, MICRO CHEWBLET, SAFECLEAN PLUS, SANISPONGE, SENSORSAFE, and SYMPHONY PLUS are trademarks of Follett Products, LLC.
CHEWBLET, FOLLETT, FOLLETT HEALTHCARE and RIDE are registered trademarks of Follett Products, LLC, registered in the US.



801 Church Lane | Easton, PA 18040, USA
+1 610.252.7301 | 800.523.9361 | folletthealthcare.com

2155-20231212 | © Follett Products, LLC