



# Follett Advantage®

medical-grade undercounter refrigerator

## Features

Ideal for light to medium duty applications

Convenience and security

- fits below ADA countertops
- exterior temperature display in C
- factory refrigeration set point at 4 C, adjustable through front controls
- maintains 4 C (39 F) temperature set point and  $\pm 2$  C uniformity
- audible and visual high/low temperature alarms
- cylinder door lock – bottom mounted with two keys
- access port for external monitoring probes

Durability and construction

- front-breathing (no top, back or side clearance required)
- painted steel exterior
- right-hinged door with replaceable magnetic door gasket
- two wire shelves, adjustable in 1.375" (3.49 cm) increments, 9 positions

Sustainable

- uses natural refrigerant R600a for climate-friendly operation

Warranty

- 1 year parts and labor

Certifications



Model configurations			
Controls	Hinge location <sup>1</sup>	Door configuration	Item number
<b>LED</b>	right	painted steel	<b>REFADV5-SD</b>

<sup>1</sup> As facing the unit.

## Options and accessories

Glycerine, 16 oz (item# 00959296)

## Specification

Nominal capacity	4.7 cu ft (132 L)
Ventilation clearance	zero clearance for top, side and back

## Exterior

<b>W1</b> Width	23.30" (59.2 cm)
<b>D1</b> Depth cabinet	25.40" (64.5 cm)
<b>H1</b> Height	31.93" (81.1 cm)
Exterior finish	painted steel
Door Swing	24.00" (61.0 cm) from front of cabinet

## Interior

Width	18.80" (47.8 cm)
Depth	20.10" (51.0 cm)
Height	25.20" (64.1 cm)
Interior finish	white formed plastic
Storage system	(2) wire shelves, adjustable in 1.375" (3.49 cm) increments, 9 positions
Shelf dimensions	19.00" x 18.00" (48.3 x 45.7 cm)
Max. load rating per shelf	34 lb (15.4 kg)

## Door configurations

Door	painted steel 23.00" x 28.4" x 1.94" (58.4 x 72.1 x 4.9 cm)
Door lock	cylinder lock, bottom mounted, 2 keys
Door handle	top center of door
Door hinge	right-hinge only
Gasket	magnetic

## Electrical

115 V/60/1	1.2 run load amps, 4.67' (1.42 m) cord with NEMA 5-15P plug
Maximum size of branch circuit overcurrent device	15 amps dedicated circuit

## Controls

Temperature display	LED at base of unit
<b>C1</b> 3rd party probe access	left side access
Factory preset	4 C
Programmable operating range	2 to 8 C (35.6 to 46.4 F)
Product simulation bottle size	30 ml

## Alarming

High and low product temperature alarm	visual and audible
--	--------------------

## System performance

Refrigeration system	forced air circulation
Compressor	fixed speed
Refrigerant and charge	R600a, 1 oz (28 g)
Air circulation system	evaporator fan
Energy consumption	0.63 kWh/24 hours
Nominal heat rejection	369 BTU/hr (108 W)
Max heat rejection	553 BTU/hr (162 W)
Sound level	45 dBA



Defrost	forced off cycle
---------	------------------

## Shipping

Approximate net weight	82 lb (37 kg)
Approximate ship weight	120 lb (54 kg)
Note: For indoor use only	

SHORT FORM SPECIFICATION: Follett Advantage undercounter refrigerator with painted steel door fits under 34.00" (86.4 cm) ADA height counters with 4.7 cu ft (132 L) of nominal capacity. Includes (2) wire shelves, adjustable in 1.375" (3.49 cm) increments, 9 positions. R600a refrigerant forced-air cooled refrigeration system. Bottom-mounted controls display air temperature in C. Integral high and low temperature alarming. 4.67' (1.42 m) power cord with NEMA 5-15P plug. UL and ETL listed.

## Dimensional drawing

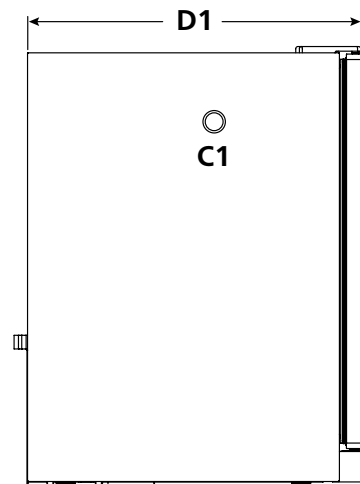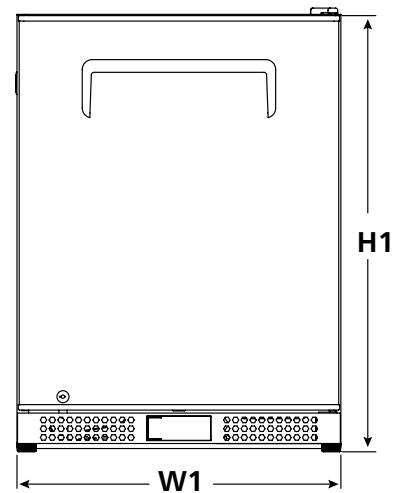

FOLLETT and FOLLETT ADVANTAGE are registered trademark of Follett Products, LLC, registered in the US. Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

## REFADV5 undercounter refrigerator