







| 2024

effective 04/01/24
revised 04/02/24



- medical-grade refrigerators 
- medical-grade freezers 
- ice and water dispensers 
- ice machines 
- slope front bins 

Contents

| | |
|---|-----------|
| TERMS AND POLICIES | 5 |
| MEDICAL-GRADE REFRIGERATORS AND FREEZERS | 6 |
| Follett authorized installation services ¹ | 7 |
| COUNTERTOP REFRIGERATORS | 8 |
| REF1 and REF2 countertop refrigerators | 8 |
| REFVAC2 countertop NSF 456 certified vaccine refrigerators | 8 |
| UNDERCOUNTER REFRIGERATORS | 9 |
| REF4P and REF5P Performance Plus undercounter refrigerators | 9 |
| REF4P and REF5P Performance Plus undercounter refrigerators with Wi-Fi remote monitoring | 10 |
| REFOMN4P and REFOMN5P Performance Plus Omnicell FlexLock-ready undercounter refrigerators | 10 |
| REFVAC4P and REFVAC5P Performance Plus undercounter NSF 456 certified vaccine refrigerators | 10 |
| REF5BBP-T Performance Plus undercounter blood bank refrigerators | 11 |
| REFNAT5 Edge Series undercounter refrigerators | 11 |
| REFADV5-SD Follett Advantage undercounter refrigerator | 11 |
| REF3-VAC undercounter refrigerator | 11 |
| INFINITY SERIES™ UPRIGHT REFRIGERATORS, VARIABLE SPEED | 12 |
| REF12i, REF20i, REF25i single door upright refrigerators | 12 |
| REF12i, REF20i, REF25i with Wi-Fi remote monitoring single door upright refrigerators | 14 |
| REF20i and REF25i Omnicell FlexLock-ready single door upright refrigerators | 15 |
| REF20i-BB and REF25i-BB blood bank single door upright refrigerators | 16 |
| UPRIGHT REFRIGERATORS, FIXED SPEED | 17 |
| REF12-LB single door upright refrigerators for laboratory and pharmacy | 17 |
| UPRIGHT REFRIGERATORS, FIXED SPEED | 18 |
| REF45-LB/PH double door upright refrigerators for laboratory and pharmacy | 18 |
| REFVAC45 double door upright NSF 456 certified vaccine refrigerators | 19 |
| REF45-BB double door upright refrigerators for blood banks | 19 |
| COUNTERTOP FREEZERS | 20 |
| FZR1 and FZR2 countertop freezers | 20 |
| FZRVAC2 countertop NSF 456 certified vaccine freezers | 20 |
| UNDERCOUNTER FREEZERS | 21 |
| FZR4P and FZR5P Performance Plus undercounter freezers | 21 |
| FZRVAC4P and FZRVAC5P Performance Plus undercounter NSF 456 certified vaccine freezers | 22 |
| FZR5PLP-T Performance Plus undercounter plasma freezer | 22 |
| FZRNAT5 Edge Series undercounter freezer | 22 |
| UPRIGHT FREEZERS | 23 |
| FZR20-LB and FZR25-LB single door upright freezers for laboratory and pharmacy | 23 |
| FZRVAC20-LB and FZRVAC25-LB single door upright NSF 456 certified vaccine freezers | 23 |
| FZRMD24 -30 C single door upright freezer for laboratory | 24 |
| FZR20 and FZR25 single door upright freezers for plasma | 24 |
| FZR8-PC plasma chiller | 24 |
| FZRDCMD17 dual chamber biomedical ECO upright freezer | 24 |
| COMBINATION REFRIGERATOR/FREEZER | 25 |
| REFFZR9 pharmaceutical combination refrigerator and freezer | 25 |
| REFFZR16 pharmaceutical combination refrigerator and freezer | 25 |
| REFFZR21 pharmaceutical combination refrigerator and freezer | 25 |

| | |
|---|-----------|
| ULTRA-LOW CHEST FREEZERS | 26 |
| FZRC3-80 C ultra-low temperature chest freezer | 26 |
| FZRC25-86 C ultra-low temperature chest freezer..... | 26 |
| ULTRA-LOW UPRIGHT FREEZERS | 27 |
| FZR19 -86 C ultra-low temperature VIP ECO upright freezer | 27 |
| FZR26 -86 C ultra-low temperature VIP ECO upright freezer | 27 |
| FZR29 -86 C ultra-low temperature VIP ECO upright freezer | 27 |
| FZRDR13 -86 C ultra-low temperature TwinGuard upright freezer..... | 28 |
| FZRDR19 -86 C ultra-low temperature TwinGuard upright freezer..... | 28 |
| FZRDR26 -86 C ultra-low temperature TwinGuard upright freezer..... | 28 |
| CRYOGENIC FREEZERS AND CO2 INCUBATORS | 29 |
| FZRC8 -150 C cryogenic chest freezer | 29 |
| CO2INC30 Reach-In CO2 incubator | 29 |
| REFRIGERATOR AND FREEZER ACCESSORIES | 30 |
| Countertop refrigerator and freezer accessories and warranties | 30 |
| Undercounter refrigerator and freezer accessories and warranties | 30 |
| Upright refrigerator and freezer accessories and warranties | 31 |
| ICE AND WATER DISPENSERS | 32 |
| Symphony Plus ice and water dispensers – 12 series | 33 |
| Symphony Plus ice-only dispensers – 12 series | 33 |
| Symphony Plus ice and water dispensers with removable ice machine – 25 and 50 series | 34 |
| Symphony Plus series ice-only dispensers – 25 and 50 series | 35 |
| Symphony Plus ice and water dispensers with removable ice machine – 110 series | 36 |
| Symphony Plus manual load ice and water dispensers – 110 series | 36 |
| Symphony Plus ice-only dispensers – 110 series | 37 |
| Symphony Plus base stand options | 37 |
| ICE AND WATER DISPENSER ACCESSORIES | 37 |
| Water treatment accessories for Symphony Plus ice and water dispensers | 37 |
| Cleaning and sanitizing accessories for Symphony Plus ice and water dispensers..... | 38 |
| Other accessories for Symphony Plus ice and water dispensers..... | 38 |
| Replacement ice machine for use in existing Symphony and Symphony Plus dispensers | 39 |
| Replacement ice machine ordering matrix..... | 39 |
| ICE MACHINES | 40 |
| Maestro Plus ice machine bins – 400 series | 41 |
| Maestro Plus flake ice machines for ice storage bins – 400 series | 42 |
| Maestro Plus Chewblet ice machines for ice storage bins – 400 series..... | 43 |
| Maestro Plus Chewblet ice machines for countertop ice and beverage dispensers – 400 series | 44 |
| Top kits for top mount model Maestro Plus 400 series ice machines used with countertop ice and beverage dispensers | 45 |
| Top kits for RIDE model Maestro Plus and Horizon Elite series ice machines for use with countertop ice and beverage dispensers | 45 |
| Horizon Elite Chewblet ice machines for ice storage bins – 710 series..... | 46 |
| Horizon Elite Chewblet ice machines for countertop ice and beverage dispensers – 710 series | 46 |
| Top kits for Horizon Elite 710 RIDE ice machines for use with countertop ice and beverage dispensers... .. | 47 |
| Ice transport tube | 47 |
| Top kits for Horizon Elite 710 series ice machines for use with countertop ice and beverage dispensers... .. | 48 |
| ICE MACHINE ACCESSORIES | 49 |
| Water treatment accessories for ice machines | 49 |
| Cleaning and sanitizing accessories for ice machines | 49 |
| Other accessories for ice machines..... | 49 |

| | |
|---|----|
| ICE STORAGE, ICE TRANSPORT AND ICE HANDLING | 50 |
| Slope front bins | 51 |
| Replacement stainless steel tops for slope front bins | 51 |

Terms and policies

Terms

- Products for sale meet all regulatory compliances as noted in the appropriate Follett Product Specification Sheet at the time of sale. Customer understands and accepts these products as meeting the designated regulatory compliances.
- Net 30 day terms on approved accounts
- Prices subject to change without notice
- Specifications subject to change without notice
- This price list supersedes all others
- **Pricing is in USD**
- **Products priced with EX Works (EXW) terms**
- **Other shipping terms available upon request**

Return Policy

Non-standard equipment cannot be returned. Orders for non-standard equipment cannot be cancelled.

Follett equipment may be returned for credit under the following conditions:

- The equipment is new and unused
- A return authorization number has been issued by customer service within 45 days after shipment
- Follett receives the equipment at the factory in Easton, PA within 30 days after issuance of the return authorization number
- The equipment must be returned in Follett packaging. If the packaging has been damaged or discarded, Follett will forward new packaging at the customer's expense.

Note: Return freight charges are the responsibility of the customer. If equipment is returned and is damaged because of improper packaging, Follett Products, LLC will not be held responsible.

Credit will be issued when the equipment has been inspected by Follett and deemed suitable to be returned to stock.

Note: A 20% restocking charge will be deducted from the credit. If the cost to return the product to stock exceeds 20%, the actual cost will be deducted.

Medical-grade refrigerators and freezers

Follett medical-grade refrigerators and freezers provide the consistent, stable temperatures and access security required for patient floor, lab and pharmacy applications. Heavy-duty compressors and powerful forced-air cooling provide exceptional temperature consistency, quick temperature pull down and rapid recovery following door openings.

Warranty

PHCbi co-branded models

Please visit <https://www.phchd.com/global/biomedical>.

Follett medical-grade countertop, undercounter (Performance Plus and Edge Series™) and upright refrigerators and freezers (including Infinity Series™)

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 2 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 2 year period are covered under this warranty.

The compressor shall be covered for an additional 3 years (parts only), for a total of 5 years from the date of installation.

Follett Advantage® undercounter refrigerators

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 1 year from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 1 year period are covered under this warranty.

FOLLETT WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond the control of Follett are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective upon examination.
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.

This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship.

Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.

Follett authorized installation services¹

Authorized installation


Equipment is shipped via Follett logistics partner, delivered to customer's facility, and positioned in final customer-designated location by certified technicians. Certified Follett technician will remove and discard all packaging material, install casters, make all electrical connections, and complete set up to ensure the unit is fully operational and ready to be used by customer.

For additional product information and terms and conditions, request form# 8620.


¹ Authorized services available only with Follett contracted logistics provider and does not include dock-to-dock common carrier freight charges.

Countertop and undercounter refrigerators and freezers

| Item number | Description | Net price |
|-------------|--|-----------|
| AS1 | Authorized installation, first unit | \$350 |
| | Authorized installation, subsequent units of the same model to the same location | \$175 |



Countertop



Undercounter

Single door upright refrigerators and freezers


| Item number | Description | Net price |
|-------------|--|-----------|
| AS2 | Authorized installation, first unit | \$500 |
| | Authorized installation, subsequent units of the same model to the same location | \$250 |



Single door upright


Double door upright refrigerators

| Item number | Description | Net price |
|-------------|--|-----------|
| AS3 | Authorized installation, first unit | \$800 |
| | Authorized installation, subsequent units of the same model to the same location | \$375 |

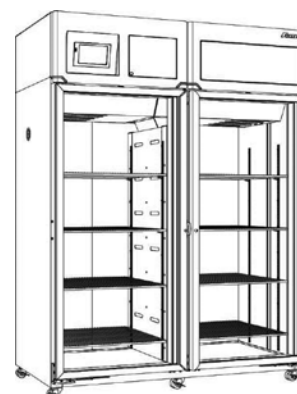


Double door upright

Countertop refrigerators



REF1



REF2/REFVAC2

REF1 and REF2 countertop refrigerators

Medical-grade countertop refrigerators for small storage needs. Forced air, external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.

For additional product information, request form# 6555 for REF1 or 6560 for REF2.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Front access condensate pan | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|-------------|-----------------------------|---------|--------|--------------------------------|------------------|------------------|-------------------|----------------------------|------------|
| REF1 | 1.0 (28) | right | no | no | 18.60 (47.2) | 24.00 (61.0) | 17.93 (45.5) | 109 (50) | \$4,480 |
| REF1-KP | 1.0 (28) | right | yes | no | 18.60 (47.2) | 24.00 (61.0) | 17.93 (45.5) | 109 (50) | \$5,255 |
| REF1-PR | 1.0 (28) | right | no | yes | 18.60 (47.2) | 24.00 (61.0) | 17.93 (45.5) | 109 (50) | \$4,630 |
| REF2 | 1.8 (51) | right | no | no | 18.60 (47.2) | 24.00 (61.0) | 27.93 (70.9) | 132 (60) | \$4,770 |
| REF2-KP | 1.8 (51) | right | yes | no | 18.60 (47.2) | 24.00 (61.0) | 27.93 (70.9) | 132 (60) | \$5,545 |
| REF2-PR | 1.8 (51) | right | no | yes | 18.60 (47.2) | 24.00 (61.0) | 27.93 (70.9) | 132 (60) | \$4,920 |

REFVAC2 countertop NSF 456 certified vaccine refrigerators


Medical-grade countertop NSF/ANSI 456 certified vaccine refrigerators for small storage needs. Forced air, external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.

For additional product information, request form# 9060.


See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Front access condensate pan | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|-------------|-----------------------------|---------|--------|--------------------------------|------------------|------------------|-------------------|----------------------------|------------|
| REFVAC2 | 1.8 (51) | right | no | no | 18.60 (47.2) | 24.00 (61.0) | 27.93 (70.9) | 132 (60) | \$4,995 |


Undercounter refrigerators




Performance Plus
LED display




Performance Plus
7" LCD touchscreen display



REF3-VAC



Edge Series



Follett Advantage

REF4P and REF5P Performance Plus undercounter refrigerators

Medical-grade undercounter refrigerators, freestanding or stackable, with external temperature display in F or C, integral high/low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REF4P fits below 34.00" (86.4 cm) ADA-compatible counter and model REF5P fits below a standard 36.00" (91.4 cm) high counter. Ideal for heavy duty applications.

For additional product information, request form# 6455 for REF4P, 6460 for REF5P, 6505 for REF4P-T, or 6510 for REF5P-T.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|---|-----------------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|------------|
| LED digital temperature display | | | | | | | | | |
| REF4P-OR-00-00 | 3.9 (110) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$5,600 |
| REF5P-OR-00-00 | 4.5 (127) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$5,600 |
| REF4P-OR-00-GD | 3.9 (110) | right | no | glass | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$6,150 |
| REF5P-OR-00-GD | 4.5 (127) | right | no | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$6,150 |
| REF4P-OR-KP-00 | 3.9 (110) | right | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$6,375 |
| REF5P-OR-KP-00 | 4.5 (127) | right | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$6,375 |
| REF4P-OR-KP-GD | 3.9 (110) | right | yes | glass | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$6,925 |
| REF5P-OR-KP-GD | 4.5 (127) | right | yes | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$6,925 |
| REF4P-OL-00-00 | 3.9 (110) | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$5,600 |
| REF5P-OL-00-00 | 4.5 (127) | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$5,600 |
| REF4P-OL-00-GD | 3.9 (110) | left | no | glass | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$6,150 |
| REF5P-OL-00-GD | 4.5 (127) | left | no | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$6,150 |
| REF4P-OL-KP-00 | 3.9 (110) | left | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$6,375 |
| REF5P-OL-KP-00 | 4.5 (127) | left | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$6,375 |
| REF4P-OL-KP-GD | 3.9 (110) | left | yes | glass | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$6,925 |
| REF5P-OL-KP-GD | 4.5 (127) | left | yes | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$6,925 |
| 7" LCD touchscreen digital temperature display | | | | | | | | | |
| REF4P-TR-00-00 | 3.9 (110) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$7,145 |
| REF5P-TR-00-00 | 4.5 (127) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$7,145 |
| REF4P-TR-00-GD | 3.9 (110) | right | no | glass | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$7,695 |
| REF5P-TR-00-GD | 4.5 (127) | right | no | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$7,695 |
| REF4P-TR-KP-00 | 3.9 (110) | right | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$7,595 |
| REF5P-TR-KP-00 | 4.5 (127) | right | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$7,595 |
| REF4P-TR-KP-GD | 3.9 (110) | right | yes | glass | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$8,145 |
| REF5P-TR-KP-GD | 4.5 (127) | right | yes | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$8,145 |
| REF4P-TL-00-00 | 3.9 (110) | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$7,145 |
| REF5P-TL-00-00 | 4.5 (127) | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$7,145 |
| REF4P-TL-00-GD | 3.9 (110) | left | no | glass | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$7,695 |
| REF5P-TL-00-GD | 4.5 (127) | left | no | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$7,695 |
| REF4P-TL-KP-00 | 3.9 (110) | left | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$7,595 |
| REF5P-TL-KP-00 | 4.5 (127) | left | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$7,595 |
| REF4P-TL-KP-GD | 3.9 (110) | left | yes | glass | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$8,145 |
| REF5P-TL-KP-GD | 4.5 (127) | left | yes | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$8,145 |

REF4P and REF5P Performance Plus undercounter refrigerators with Wi-Fi remote monitoring

Medical-grade, undercounter refrigerators with Wi-Fi based cloud communication functionality for continuous temperature monitoring and remote alarming. Freestanding or stackable with LED control, integral high/low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REF4P fits below 34.00" (86.4 cm) ADA-compatible counter and model REF5P fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order. Ideal for heavy duty applications.

For additional product information, request form# 9020.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|--|-----------------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|-----------------|
| LED digital temperature display | | | | | | | | | |
| REF4P-0R-00-00-N | 3.9 (110) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | Contact factory |
| REF5P-0R-00-00-N | 4.5 (127) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | Contact factory |
| REF4P-0L-00-00-N | 3.9 (110) | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | Contact factory |
| REF5P-0L-00-00-N | 4.5 (127) | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | Contact factory |

REFOMN4P and REFOMN5P Performance Plus Omnicell FlexLock-ready undercounter refrigerators

Medical-grade, undercounter refrigerators with pre-drilled holes for installing Omnicell® XT FlexLock Refrigerator Lock and Temperature Monitor (not included). LED control or LCD touchscreen display, integral high/low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REFOMN4P fits below 34.00" (86.4 cm) ADA-compatible counter and model REFOMN5P fits below a standard 36.00" (91.4 cm) high counter. Ideal for heavy duty applications.

For additional product information, request form# 8970.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|---|-----------------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|-----------------|
| LED digital temperature display | | | | | | | | | |
| REFOMN4P-0R-00-00 | 3.9 (110) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | Contact factory |
| REFOMN5P-0R-00-00 | 4.5 (127) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | Contact factory |
| 7" LCD touchscreen digital temperature display | | | | | | | | | |
| REFOMN4P-TR-00-00 | 3.9 (110) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | Contact factory |
| REFOMN5P-TR-00-00 | 4.5 (127) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | Contact factory |

REFVAC4P and REFVAC5P Performance Plus undercounter NSF 456 certified vaccine refrigerators

Medical-grade undercounter NSF/ANSI 456 certified vaccine refrigerators. Freestanding or stackable, with external temperature display in F or C, integral high/low alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model REFVAC4P fits below 34.00" (86.4 cm) ADA-compatible counter and model REFVAC5P fits below a standard 36.00" (91.4 cm) high counter. Ideal for heavy duty applications.

For additional product information, request form# 9055.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|---|-----------------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|------------|
| LED digital temperature display | | | | | | | | | |
| REFVAC4P-0R-00-00 | 3.9 (110) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$5,825 |
| REFVAC5P-0R-00-00 | 4.5 (127) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$5,825 |
| 7" LCD touchscreen digital temperature display | | | | | | | | | |
| REFVAC4P-TR-00-00 | 3.9 (110) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$7,370 |
| REFVAC5P-TR-00-00 | 4.5 (127) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$7,380 |

REF5BBP-T Performance Plus undercounter blood bank refrigerators

Medical-grade, undercounter blood bank refrigerators, freestanding or stackable, with 7" LCD touchscreen user interface with integral data and event logging. Stainless steel construction on interior/exterior with internal LED lighting. 115V/60/1 electrical. For undercounter applications: fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order. Two full extension, stainless drawers standard. Includes separate temperature surveillance module with audible/visual alarm, 7-day chart recorder and digital product temperature display. Meets AABB, FDA, ARC requirements for storage of blood products at 4 C. Ideal for heavy duty applications.

For additional product information, request form# 6475.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Bags (450 ml) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|------------------|-----------------------------|------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|------------|
| REF5BBP-TR-00-00 | 4.5 (127) | 60 | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$10,745 |
| REF5BBP-TR-00-GD | 4.5 (127) | 60 | right | no | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$11,295 |
| REF5BBP-TR-KP-00 | 4.5 (127) | 60 | right | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$11,195 |
| REF5BBP-TR-KP-GD | 4.5 (127) | 60 | right | yes | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$11,745 |
| REF5BBP-TL-00-00 | 4.5 (127) | 60 | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$10,745 |
| REF5BBP-TL-00-GD | 4.5 (127) | 60 | left | no | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$11,295 |
| REF5BBP-TL-KP-00 | 4.5 (127) | 60 | left | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$11,195 |
| REF5BBP-TL-KP-GD | 4.5 (127) | 60 | left | yes | glass | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$11,745 |

REFNAT5 Edge Series undercounter refrigerators

Medical-grade undercounter refrigerators with LED control, right-hinged door available in solid steel or dual-pane glass and electro galvanized steel, painted steel exterior, preset automatic alarm tracking around set point, 3 coated steel wire shelves, variable speed compressor, R600a natural refrigerant. 115V/60/1 electrical. Fits below standard 36.00" (91.4 cm) counter. Ideal for medium to heavy duty applications.

For additional product information, request form# 9045.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | Net price |
|-------------|-----------------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|-----------|
| REFNAT5-SD | 5.0 (142 L) | right | no | steel | 23.84 (60.6) | 24.50" (62.2) | 34.10 (86.6) | 130 (59) | \$1,840 |
| REFNAT5-GD | 5.0 (142 L) | right | no | glass | 23.84 (60.6) | 24.50" (62.2) | 34.10 (86.6) | 136 (62) | \$2,070 |

REFADV5-SD Follett Advantage undercounter refrigerator

Medical-grade undercounter refrigerator with LED control, right-hinged painted steel door, audible and visual high/low temperature alarms, 2 adjustable wire shelves. 115V/60/1 electrical. Fits below 34.00" (86.4 cm) ADA-compatible counter. Ideal for light to medium duty applications.

For additional product information, request form# 8455.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | Net price |
|-------------|-----------------------------|---------|--------|---------------|------------------|------------------|-------------------|----------------------------|-----------|
| REFADV5-SD | 4.7 (132 L) | right | no | painted steel | 23.30 (59.2) | 25.40 (64.5) | 31.93 (81.1) | 120 (54) | \$930 |

REF3-VAC undercounter refrigerator

PHCbi brand high performance undercounter vaccine refrigerator, 3.0 cu ft capacity, +2 C to +8 C temperature range, glass door, 2 adjustable shelves, microprocessor controller with touchpad display. High/low temperature, power failure and door alarming. 115/60 electrical. ADA compliant. ENERGY STAR® certified.

For additional product information, request form# 12603.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | Net price |
|-------------|-----------------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|-----------|
| REF3-VAC | 3.0 (85) | right | no | glass | 22.50 (57.2) | 22.10 (56.2) | 29.60 (75.1) | 120 (54) | \$1,875 |

Infinity Series™ upright refrigerators, variable speed



Shelves



Baskets



Drawers



Blood Banks

REF12i, REF20i, REF25i single door upright refrigerators

Infinity Series upright refrigerator with variable capacity compressor, LCD touchscreen user interface, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, user-programmable temperature display and integral alarming functions, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Interchangeable storage options allow the interior cabinet space to be configured with shelves, baskets or drawers to your exact needs. Certified to meet NSF/ANSI 456 standard for vaccine storage.

For additional product information, request form# 1027.

See page 31 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Vaccine storage capacity cu ft (L) | Storage system | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|------------------|--------------------------|------------------------------------|----------------|---------|------------|-------------|--------|---------------|---------------|----------------|-------------------------|-----------------|
| REF12i-4S-R00G | 12.0 (340) | 7.2 (204) | 4 shelves | right | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-4S-R0000G | 19.7 (558) | 12.7 (360) | 4 shelves | right | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-R0000G | 24.6 (697) | 16.8 (476) | 4 shelves | right | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF12i-4S-R00S | 12.0 (340) | 7.2 (204) | 4 shelves | right | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-4S-R0000S | 19.7 (558) | 12.7 (360) | 4 shelves | right | stainless | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-R0000S | 24.6 (697) | 16.8 (476) | 4 shelves | right | stainless | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF20i-4S-R00KPG | 19.7 (558) | 12.7 (360) | 4 shelves | right | glass | no | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-R00KPG | 24.6 (697) | 16.8 (476) | 4 shelves | right | glass | no | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF20i-4S-R00KPS | 19.7 (558) | 12.7 (360) | 4 shelves | right | stainless | no | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-R00KPS | 24.6 (697) | 16.8 (476) | 4 shelves | right | stainless | no | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF20i-4S-RHT00G | 19.7 (558) | 12.7 (360) | 4 shelves | right | glass | yes | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-RHT00G | 24.6 (697) | 16.8 (476) | 4 shelves | right | glass | yes | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF20i-4S-RHTKPG | 19.7 (558) | 12.7 (360) | 4 shelves | right | glass | yes | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-RHTKPG | 24.6 (697) | 16.8 (476) | 4 shelves | right | glass | yes | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF12i-4S-L00G | 12.0 (340) | 7.2 (204) | 4 shelves | left | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-4S-L0000G | 19.7 (558) | 12.7 (360) | 4 shelves | left | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-L0000G | 24.6 (697) | 16.8 (476) | 4 shelves | left | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF12i-4S-L00S | 12.0 (340) | 7.2 (204) | 4 shelves | left | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-4S-L0000S | 19.7 (558) | 12.7 (360) | 4 shelves | left | stainless | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-L0000S | 24.6 (697) | 16.8 (476) | 4 shelves | left | stainless | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF20i-4S-L00KPG | 19.7 (558) | 12.7 (360) | 4 shelves | left | glass | no | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-L00KPG | 24.6 (697) | 16.8 (476) | 4 shelves | left | glass | no | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF20i-4S-L00KPS | 19.7 (558) | 12.7 (360) | 4 shelves | left | stainless | no | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-L00KPS | 24.6 (697) | 16.8 (476) | 4 shelves | left | stainless | no | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF20i-4S-LHT00G | 19.7 (558) | 12.7 (360) | 4 shelves | left | glass | yes | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-LHT00G | 24.6 (697) | 16.8 (476) | 4 shelves | left | glass | yes | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF20i-4S-LHTKPG | 19.7 (558) | 12.7 (360) | 4 shelves | left | glass | yes | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-LHTKPG | 24.6 (697) | 16.8 (476) | 4 shelves | left | glass | yes | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |

| Item number | Cubic capacity cu ft (L) | Vaccine storage capacity cu ft (L) | Storage system | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|------------------|--------------------------|------------------------------------|----------------|---------|------------|-------------|--------|---------------|---------------|----------------|-------------------------|-----------------|
| REF12i-5B-R00G | 12.0 (340) | 7.6 (215) | 5 baskets | right | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6B-R0000G | 19.7 (558) | 12.8 (362) | 6 baskets | right | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-R0000G | 24.6 (697) | 16.4 (464) | 6 baskets | right | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF12i-5B-R00S | 12.0 (340) | 7.6 (215) | 5 baskets | right | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6B-R0000S | 19.7 (558) | 12.8 (362) | 6 baskets | right | stainless | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-R0000S | 24.6 (697) | 16.4 (464) | 6 baskets | right | stainless | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF20i-6B-R00KPG | 19.7 (558) | 12.8 (362) | 6 baskets | right | glass | no | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-R00KPG | 24.6 (697) | 16.4 (464) | 6 baskets | right | glass | no | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF20i-6B-R00KPS | 19.7 (558) | 12.8 (362) | 6 baskets | right | stainless | no | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-R00KPS | 24.6 (697) | 16.4 (464) | 6 baskets | right | stainless | no | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF20i-6B-RHT00G | 19.7 (558) | 12.8 (362) | 6 baskets | right | glass | yes | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-RHT00G | 24.6 (697) | 16.4 (464) | 6 baskets | right | glass | yes | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF20i-6B-RHTKPG | 19.7 (558) | 12.8 (362) | 6 baskets | right | glass | yes | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-RHTKPG | 24.6 (697) | 16.4 (464) | 6 baskets | right | glass | yes | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF12i-5B-L00G | 12.0 (340) | 7.6 (215) | 5 baskets | left | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6B-L0000G | 19.7 (558) | 12.8 (362) | 6 baskets | left | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-L0000G | 24.6 (697) | 16.4 (464) | 6 baskets | left | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF12i-5B-L00S | 12.0 (340) | 7.6 (215) | 5 baskets | left | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6B-L0000S | 19.7 (558) | 12.8 (362) | 6 baskets | left | stainless | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-L0000S | 24.6 (697) | 16.4 (464) | 6 baskets | left | stainless | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF20i-6B-L00KPG | 19.7 (558) | 12.8 (362) | 6 baskets | left | glass | no | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-L00KPG | 24.6 (697) | 16.4 (464) | 6 baskets | left | glass | no | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF20i-6B-L00KPS | 19.7 (558) | 12.8 (362) | 6 baskets | left | stainless | no | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-L00KPS | 24.6 (697) | 16.4 (464) | 6 baskets | left | stainless | no | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF20i-6B-LHT00G | 19.7 (558) | 12.8 (362) | 6 baskets | left | glass | yes | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-LHT00G | 24.6 (697) | 16.4 (464) | 6 baskets | left | glass | yes | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF20i-6B-LHTKPG | 19.7 (558) | 12.8 (362) | 6 baskets | left | glass | yes | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-LHTKPG | 24.6 (697) | 16.4 (464) | 6 baskets | left | glass | yes | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF12i-5D-R00G | 12.0 (340) | 7.5 (212) | 5 drawers | right | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6D-R0000G | 19.7 (558) | 13.8 (391) | 6 drawers | right | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-6D-R0000G | 24.6 (697) | 18.2 (515) | 6 drawers | right | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |
| REF12i-5D-R00S | 12.0 (340) | 7.5 (212) | 5 drawers | right | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6D-R0000S | 19.7 (558) | 13.8 (391) | 6 drawers | right | stainless | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-6D-R0000S | 24.6 (697) | 18.2 (515) | 6 drawers | right | stainless | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |
| REF12i-5D-L00G | 12.0 (340) | 7.5 (212) | 5 drawers | left | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6D-L0000G | 19.7 (558) | 13.8 (391) | 6 drawers | left | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-6D-L0000G | 24.6 (697) | 18.2 (515) | 6 drawers | left | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |
| REF12i-5D-L00S | 12.0 (340) | 7.5 (212) | 5 drawers | left | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6D-L0000S | 19.7 (558) | 13.8 (391) | 6 drawers | left | stainless | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-6D-L0000S | 24.6 (697) | 18.2 (515) | 6 drawers | left | stainless | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |

REF12i, REF20i, REF25i with Wi-Fi remote monitoring single door upright refrigerators

Infinity Series upright refrigerators with variable capacity compressor, Wi-Fi based cloud communication functionality, LCD touchscreen user interface, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, user-programmable temperature display and integral alarming functions, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Interchangeable storage options allow the interior cabinet space to be configured with shelves, baskets or drawers to your exact needs. Certified to meet NSF/ANSI 456 standard for vaccine storage.

For additional product information, request form# 1027.

See page 31 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Vaccine storage capacity cu ft (L) | Storage system | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|-------------------|--------------------------|------------------------------------|----------------|---------|------------|-------------|--------|---------------|---------------|----------------|-------------------------|-----------------|
| REF12i-4S-R00GN | 12.0 (340) | 7.2 (204) | 4 shelves | right | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-4S-R0000GN | 19.7 (558) | 12.7 (360) | 4 shelves | right | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-R0000GN | 24.6 (697) | 16.8 (476) | 4 shelves | right | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF12i-4S-R00SN | 12.0 (340) | 7.2 (204) | 4 shelves | right | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-4S-R0000SN | 19.7 (558) | 12.7 (360) | 4 shelves | right | stainless | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-R0000SN | 24.6 (697) | 16.8 (476) | 4 shelves | right | stainless | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF12i-4S-L00GN | 12.0 (340) | 7.2 (204) | 4 shelves | left | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-4S-L0000GN | 19.7 (558) | 12.7 (360) | 4 shelves | left | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-L0000GN | 24.6 (697) | 16.8 (476) | 4 shelves | left | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF12i-4S-L00SN | 12.0 (340) | 7.2 (204) | 4 shelves | left | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-4S-L0000SN | 19.7 (558) | 12.7 (360) | 4 shelves | left | stainless | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REF25i-4S-L0000SN | 24.6 (697) | 16.8 (476) | 4 shelves | left | stainless | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REF12i-5B-R00GN | 12.0 (340) | 7.6 (215) | 5 baskets | right | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6B-R0000GN | 19.7 (558) | 12.8 (362) | 6 baskets | right | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-R0000GN | 24.6 (697) | 16.4 (464) | 6 baskets | right | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF12i-5B-R00SN | 12.0 (340) | 7.6 (215) | 5 baskets | right | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6B-R0000SN | 19.7 (558) | 12.8 (362) | 6 baskets | right | stainless | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-R0000SN | 24.6 (697) | 16.4 (464) | 6 baskets | right | stainless | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF12i-5B-L00GN | 12.0 (340) | 7.6 (215) | 5 baskets | left | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6B-L0000GN | 19.7 (558) | 12.8 (362) | 6 baskets | left | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-L0000GN | 24.6 (697) | 16.4 (464) | 6 baskets | left | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF12i-5B-L00SN | 12.0 (340) | 7.6 (215) | 5 baskets | left | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF20i-6B-L0000SN | 19.7 (558) | 12.8 (362) | 6 baskets | left | stainless | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REF25i-6B-L0000SN | 24.6 (697) | 16.4 (464) | 6 baskets | left | stainless | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REF12i-5D-R00GN | 12.0 (340) | 7.5 (212) | 5 drawers | right | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF12i-5D-R00SN | 12.0 (340) | 7.5 (212) | 5 drawers | right | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF12i-5D-L00GN | 12.0 (340) | 7.5 (212) | 5 drawers | left | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REF12i-5D-L00SN | 12.0 (340) | 7.5 (212) | 5 drawers | left | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |

REF20i and REF25i Omnicell FlexLock-ready single door upright refrigerators

Infinity Series upright refrigerators designed for installation of Omnicell® XT FlexLock Refrigerator Lock and Temperature Monitor, with variable capacity compressor, LCD touchscreen user interface, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, user-programmable temperature display and integral alarming functions, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Interchangeable storage options allow the interior cabinet space to be configured with shelves, baskets or drawers to your exact needs. Certified to meet NSF/ANSI 456 standard for vaccine storage.

For additional product information, request form# 1027.

See page 31 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Vaccine storage capacity cu ft (L) | Storage system | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|---------------------|--------------------------|------------------------------------|----------------|---------|------------|-------------|--------|---------------|---------------|----------------|-------------------------|-----------------|
| REFOMN12i-4S-R00G | 12.0 (340) | 7.2 (204) | 4 shelves | right | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REFOMN20i-4S-R0000G | 19.7 (558) | 12.7 (360) | 4 shelves | right | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REFOMN25i-4S-R0000G | 24.6 (697) | 16.8 (476) | 4 shelves | right | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REFOMN12i-4S-R00S | 12.0 (340) | 7.2 (204) | 4 shelves | right | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REFOMN12i-4S-L00G | 12.0 (340) | 7.2 (204) | 4 shelves | left | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REFOMN20i-4S-L0000G | 19.7 (558) | 12.7 (360) | 4 shelves | left | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 431 (196) | Contact factory |
| REFOMN25i-4S-L0000G | 24.6 (697) | 16.8 (476) | 4 shelves | left | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 477 (217) | Contact factory |
| REFOMN12i-4S-L00S | 12.0 (340) | 7.2 (204) | 4 shelves | left | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REFOMN12i-5B-R00G | 12.0 (340) | 7.6 (215) | 5 baskets | right | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REFOMN20i-6B-R0000G | 19.7 (558) | 12.8 (362) | 6 baskets | right | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REFOMN25i-6B-R0000G | 24.6 (697) | 16.4 (464) | 6 baskets | right | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REFOMN12i-5B-R00S | 12.0 (340) | 7.6 (215) | 5 baskets | right | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REFOMN12i-5B-L00G | 12.0 (340) | 7.6 (215) | 5 baskets | left | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REFOMN20i-6B-L0000G | 19.7 (558) | 12.8 (362) | 6 baskets | left | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 489 (222) | Contact factory |
| REFOMN25i-6B-L0000G | 24.6 (697) | 16.4 (464) | 6 baskets | left | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 467 (212) | Contact factory |
| REFOMN12i-5B-L00S | 12.0 (340) | 7.6 (215) | 5 baskets | left | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REFOMN12i-5D-R00G | 12.0 (340) | 7.5 (212) | 5 drawers | right | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REFOMN12i-5D-R00S | 12.0 (340) | 7.5 (212) | 5 drawers | right | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REFOMN12i-5D-L00G | 12.0 (340) | 7.5 (212) | 5 drawers | left | glass | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |
| REFOMN12i-5D-L00S | 12.0 (340) | 7.5 (212) | 5 drawers | left | stainless | no | no | 23.75 (60.3) | 26.60 (67.6) | 72.00 (182.9) | 420 (191) | Contact factory |

REF20i-BB and REF25i-BB blood bank single door upright refrigerators

Infinity Series upright refrigerators with variable capacity compressor, LCD touchscreen user interface, six full-extension stainless steel drawers, ADA-compliant full length locking handle, stainless steel interior/exterior, integral data and event logging, user-programmable temperature display and integral alarming functions, integral 6.00" (15.24 cm) 7-day chart recorder standard with 50 Celsius charts, quick-connect RTD probe with 1 year certificate of NIST-traceable calibration, heavy-duty dual casters. 115V/60/1 (103-132V) electrical. Meets AABB, ARC and FDA standards for blood storage at 4 C.

For additional product information, request form# 1028.

See page 31 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Bags (450 ml) | Storage system | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|------------------|--------------------------|---------------|----------------|---------|------------|-------------|--------|---------------|---------------|----------------|-------------------------|-----------------|
| REF20i-BB-R0000G | 19.7 (558) | 312 | 6 drawers | right | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-BB-R0000G | 24.6 (697) | 432 | 6 drawers | right | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |
| REF20i-BB-R00KPG | 19.7 (558) | 312 | 6 drawers | right | glass | no | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-BB-R00KPG | 24.6 (697) | 432 | 6 drawers | right | glass | no | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |
| REF20i-BB-RHT00G | 19.7 (558) | 312 | 6 drawers | right | glass | yes | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-BB-RHT00G | 24.6 (697) | 432 | 6 drawers | right | glass | yes | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |
| REF20i-BB-RHTKPG | 19.7 (558) | 312 | 6 drawers | right | glass | yes | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-BB-RHTKPG | 24.6 (697) | 432 | 6 drawers | right | glass | yes | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |
| REF20i-BB-L0000G | 19.7 (558) | 312 | 6 drawers | left | glass | no | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-BB-L0000G | 24.6 (697) | 432 | 6 drawers | left | glass | no | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |
| REF20i-BB-L00KPG | 19.7 (558) | 312 | 6 drawers | left | glass | no | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-BB-L00KPG | 24.6 (697) | 432 | 6 drawers | left | glass | no | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |
| REF20i-BB-LHT00G | 19.7 (558) | 312 | 6 drawers | left | glass | yes | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-BB-LHT00G | 24.6 (697) | 432 | 6 drawers | left | glass | yes | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |
| REF20i-BB-LHTKPG | 19.7 (558) | 312 | 6 drawers | left | glass | yes | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 519 (236) | Contact factory |
| REF25i-BB-LHTKPG | 24.6 (697) | 432 | 6 drawers | left | glass | yes | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 541 (246) | Contact factory |


Upright refrigerators, fixed speed

REF12-LB single door upright refrigerators for laboratory and pharmacy

Medical-grade laboratory and pharmacy refrigerators for critical product storage. Stainless steel interior/ exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged or left-hinged self-closing doors available in full-view, double pane glass with Low-E coating or solid stainless steel – must be specified at time of order. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves.

For additional product information, request form# 8545.


See page 31 for additional accessory information.




REF12-LB

| Item number | Cubic capacity cu ft (L) | Storage system | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|---------------|-----------------------------|-------------------|---------|---------------|----------------|--------|------------------|------------------|-------------------|-------------------------------|-----------------|
| REF12-LB-R00G | 11.8 (334) | 4 shelves | right | glass | no | no | 23.62 (60.0) | 27.25 (69.2) | 72.75 (184.8) | 420 (191) | Contact factory |
| REF12-LB-R00S | 11.8 (334) | 4 shelves | right | stainless | no | no | 23.62 (60.0) | 27.25 (69.2) | 72.75 (184.8) | 420 (191) | Contact factory |
| REF12-LB-L00G | 11.8 (334) | 4 shelves | left | glass | no | no | 23.62 (60.0) | 27.25 (69.2) | 72.75 (184.8) | 420 (191) | Contact factory |


Upright refrigerators, fixed speed

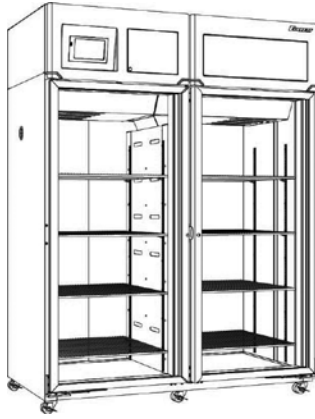


REF45-LB

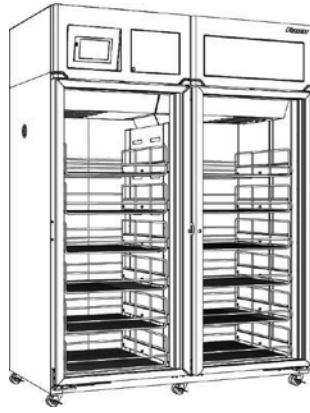

REF45-PH
REFVAC45-LB/PH

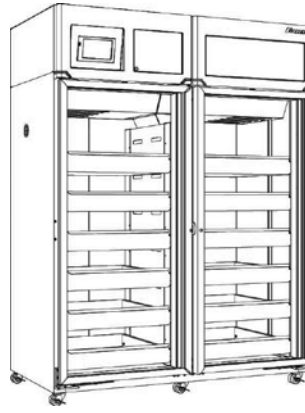

REFVAC45-PD

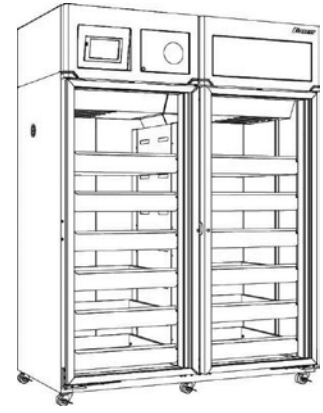

REF45-BB

REF45-LB/PH double door upright refrigerators for laboratory and pharmacy

Medical-grade laboratory and pharmacy refrigerators for critical product storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged, left-hinged or outer-hinged self-closing doors available in full-view, double pane glass with Low-E coating or solid stainless steel – must be specified at time of order. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 8 epoxy-coated shelves, 12 roll-out baskets or 12 full-extension stainless steel drawers.

For additional product information, request form# 8150 for REF45-LB, 8155 for REF45-PH, or 8595 for REF45-PD.

See page 31 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Storage system | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|-----------------|-----------------------------|-------------------|---------|---------------|----------------|--------|------------------|------------------|-------------------|-------------------------------|-----------------|
| REF45-LB-R0000G | 45.0 (1274) | 8 shelves | right | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-LB-L0000G | 45.0 (1274) | 8 shelves | left | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-LB-00000G | 45.0 (1274) | 8 shelves | outer | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-LB-R0000S | 45.0 (1274) | 8 shelves | right | stainless | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-LB-L0000S | 45.0 (1274) | 8 shelves | left | stainless | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-LB-00000S | 45.0 (1274) | 8 shelves | outer | stainless | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-LB-000KPG | 45.0 (1274) | 8 shelves | outer | glass | no | yes | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-LB-000KPS | 45.0 (1274) | 8 shelves | outer | stainless | no | yes | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-LB-RHT00G | 45.0 (1274) | 8 shelves | right | glass | yes | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-LB-LHT00G | 45.0 (1274) | 8 shelves | left | glass | yes | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-LB-OHT00G | 45.0 (1274) | 8 shelves | outer | glass | yes | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-LB-OHTKPG | 45.0 (1274) | 8 shelves | outer | glass | yes | yes | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REF45-PH-R0000G | 45.0 (1274) | 12 baskets | right | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PH-L0000G | 45.0 (1274) | 12 baskets | left | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PH-00000G | 45.0 (1274) | 12 baskets | outer | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PH-R0000S | 45.0 (1274) | 12 baskets | right | stainless | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PH-L0000S | 45.0 (1274) | 12 baskets | left | stainless | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PH-00000S | 45.0 (1274) | 12 baskets | outer | stainless | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PH-000KPG | 45.0 (1274) | 12 baskets | outer | glass | no | yes | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PH-000KPS | 45.0 (1274) | 12 baskets | outer | stainless | no | yes | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PH-RHT00G | 45.0 (1274) | 12 baskets | right | glass | yes | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PH-LHT00G | 45.0 (1274) | 12 baskets | left | glass | yes | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PH-OHT00G | 45.0 (1274) | 12 baskets | outer | glass | yes | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PH-OHTKPG | 45.0 (1274) | 12 baskets | outer | glass | yes | yes | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REF45-PD-00000G | 45.0 (1274) | 12 drawers | outer | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |

REFVAC45 double door upright NSF 456 certified vaccine refrigerators

Medical-grade NSF/ANSI 456 certified refrigerators for vaccine storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Outer hinges, self-closing door in full-view, double pane glass with Low-E coating. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 8 epoxy-coated shelves on REFVAC45-LB models, 12 roll-out baskets on REFVAC45-PH models or 12 stainless steel drawers on REFVAC45-PD models.

For additional product information, request form# 9010.

See page 31 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Storage System | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|--------------------|--------------------------|----------------|---------|------------|-------------|--------|---------------|---------------|----------------|-------------------------|-----------------|
| REFVAC45-LB-00000G | 45.0 (1274) | 8 Shelves | outer | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 750 (341) | Contact factory |
| REFVAC45-PH-00000G | 45.0 (1274) | 12 Baskets | outer | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 890 (404) | Contact factory |
| REFVAC45-PD-00000G | 45.0 (1274) | 12 Drawers | outer | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 930 (422) | Contact factory |

REF45-BB double door upright refrigerators for blood banks


Blood bank refrigerators meet AABB and FDA requirements for storage of blood at 4 C. Stainless steel interior/exterior with top and bottom temperature probes and 16 oz bottle of glycerine. Right-hinged, left-hinged or outer-hinged self-closing glass doors with full-view, double pane glass with Low-E coating – hinging must be specified at time of order. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 6.00" (15.24 cm) chart recorder. 115V/60/1 (103-132V) electrical. 12 stainless steel, full-extension drawers standard.

For additional product information, request form# 8160.


See page 31 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Bags (450 ml) | Storage system | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|-----------------|--------------------------|---------------|----------------|---------|------------|-------------|--------|---------------|---------------|----------------|-------------------------|-----------------|
| REF45-BB-R0000G | 45.0 (1274) | 816 | 12 drawers | right | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 930 (422) | Contact factory |
| REF45-BB-L0000G | 45.0 (1274) | 816 | 12 drawers | left | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 930 (422) | Contact factory |
| REF45-BB-00000G | 45.0 (1274) | 816 | 12 drawers | outer | glass | no | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 930 (422) | Contact factory |
| REF45-BB-000KPG | 45.0 (1274) | 816 | 12 drawers | outer | glass | no | yes | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 930 (422) | Contact factory |
| REF45-BB-RHT00G | 45.0 (1274) | 816 | 12 drawers | right | glass | yes | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 930 (422) | Contact factory |
| REF45-BB-LHT00G | 45.0 (1274) | 816 | 12 drawers | left | glass | yes | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 930 (422) | Contact factory |
| REF45-BB-0HT00G | 45.0 (1274) | 816 | 12 drawers | outer | glass | yes | no | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 930 (422) | Contact factory |
| REF45-BB-0HTKPG | 45.0 (1274) | 816 | 12 drawers | outer | glass | yes | yes | 59.75 (151.8) | 33.55 (85.2) | 79.54 (202.0) | 930 (422) | Contact factory |

Countertop freezers



FZR1



FZR2
FZRVAC2

FZR1 and FZR2 countertop freezers

Medical-grade countertop freezers for small storage needs. Forced air, external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.

For additional product information, request form# 6860 for FZR1 or 6865 for FZR2.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|-------------|-----------------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|------------|
| FZR1 | 0.6 (16) | right | no | stainless | 18.60 (47.2) | 24.00 (61.0) | 17.93 (45.5) | 108 (49) | \$6,660 |
| FZR1-KP | 0.6 (16) | right | yes | stainless | 18.60 (47.2) | 24.00 (61.0) | 17.93 (45.5) | 108 (49) | \$7,435 |
| FZR2 | 1.6 (44) | right | no | stainless | 18.60 (47.2) | 24.00 (61.0) | 27.93 (70.9) | 126 (57) | \$7,090 |
| FZR2-KP | 1.6 (44) | right | yes | stainless | 18.60 (47.2) | 24.00 (61.0) | 27.93 (70.9) | 126 (57) | \$7,865 |

FZRVAC2 countertop NSF 456 certified vaccine freezers


Medical-grade countertop NSF/ANSI 456 certified vaccine freezers. Forced air, external temperature display in F or C, integral high/low alarming and epoxy-coated shelving. Stainless steel construction on interior/exterior. 115V/60/1 electrical.

For additional product information, request form# 9125.


See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|-------------|-----------------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|------------|
| FZRVAC2 | 1.6 (44) | right | no | stainless | 18.60 (47.2) | 24.00 (61.0) | 27.93 (70.9) | 126 (57) | \$7,315 |


Undercounter freezers



Performance Plus
LED display



Performance Plus
7" LCD touchscreen display



Edge Series

FZR4P and FZR5P Performance Plus undercounter freezers

Medical-grade -20 C (-4 F), undercounter freezers, freestanding or stackable, with external temperature display in F or C, integral alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model FZR4P fits below 34.00" (86.4 cm) ADA-compatible counter and model FZR5P fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order.

For additional product information, request form# 6465 for FZR4P, 6470 for FZR5P, 6515 for FZR4P-T, or 6520 for FZR5P-T.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|---|-----------------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|------------|
| LED digital temperature display | | | | | | | | | |
| FZR4P-OR-00-00 | 3.9 (110) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$8,865 |
| FZR5P-OR-00-00 | 4.5 (127) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$8,865 |
| FZR4P-OR-KP-00 | 3.9 (110) | right | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$9,640 |
| FZR5P-OR-KP-00 | 4.5 (127) | right | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$9,640 |
| FZR4P-OL-00-00 | 3.9 (110) | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$8,865 |
| FZR5P-OL-00-00 | 4.5 (127) | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$8,865 |
| FZR4P-OL-KP-00 | 3.9 (110) | left | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$9,640 |
| FZR5P-OL-KP-00 | 4.5 (127) | left | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$9,640 |
| 7" LCD touchscreen digital temperature display | | | | | | | | | |
| FZR4P-TR-00-00 | 3.9 (110) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$10,415 |
| FZR5P-TR-00-00 | 4.5 (127) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$10,415 |
| FZR4P-TR-KP-00 | 3.9 (110) | right | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$10,865 |
| FZR5P-TR-KP-00 | 4.5 (127) | right | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$10,865 |
| FZR4P-TL-00-00 | 3.9 (110) | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$10,415 |
| FZR5P-TL-00-00 | 4.5 (127) | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$10,415 |
| FZR4P-TL-KP-00 | 3.9 (110) | left | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$10,865 |
| FZR5P-TL-KP-00 | 4.5 (127) | left | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$10,865 |

FZRVAC4P and FZRVAC5P Performance Plus undercounter NSF 456 certified vaccine freezers

Medical-grade undercounter NSF/ANSI 456 certified vaccine freezers. -20 C (-4 F), undercounter freezers, freestanding or stackable, with external temperature display in F or C, integral alarming and 2 epoxy-coated shelves. Stainless steel construction on interior/exterior. 115V/60/1 electrical. For undercounter applications: model FZRVAC4P fits below 34.00" (86.4 cm) ADA-compatible counter and model FZRVAC5P fits below a standard 36.00" (91.4 cm) high counter. Right-hinged only.

For additional product information, request form# 9120.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|---|-----------------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|------------|
| LED digital temperature display | | | | | | | | | |
| FZRVAC4P-OR-00-00 | 3.9 (110) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$9,090 |
| FZRVAC5P-OR-00-00 | 4.5 (127) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$9,090 |
| 7" LCD touchscreen digital temperature display | | | | | | | | | |
| FZRVAC4P-TR-00-00 | 3.9 (110) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 31.38 (79.7) | 205 (93) | \$10,640 |
| FZRVAC5P-TR-00-00 | 4.5 (127) | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$10,640 |

FZR5PLP-T Performance Plus undercounter plasma freezer

High performance -30 C (-22 F), undercounter plasma freezer, freestanding or stackable, with 7" LCD touchscreen user interface with integral data and event logging. Stainless steel construction on interior/exterior with interior LED lighting. 115V/60/1 electrical. For undercounter applications: fits below a standard 36.00" (91.4 cm) high counter. Right-hinged or left-hinged door must be specified at time of order. Two full extension stainless drawers standard. Includes separate temperature surveillance module with audible/visual alarm, 7-day chart recorder and digital product temperature display. Meets AABB, FDA, ARC requirements.

For additional product information, request form# 6480.

See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Plasma boxes (300 ml) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|------------------|-----------------------------|-----------------------------|---------|--------|------------|------------------|------------------|-------------------|----------------------------|------------|
| FZR5PLP-TR-00-00 | 4.5 (127) | 40 | right | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$14,705 |
| FZR5PLP-TR-KP-00 | 4.5 (127) | 40 | right | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$15,155 |
| FZR5PLP-TL-00-00 | 4.5 (127) | 40 | left | no | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$14,705 |
| FZR5PLP-TL-KP-00 | 4.5 (127) | 40 | left | yes | stainless | 23.75 (60.3) | 27.00 (68.6) | 34.00 (86.4) | 205 (93) | \$15,155 |

FZRNAT5 Edge Series undercounter freezer


Medical-grade undercounter freezer with LED control, right-hinged solid door, painted steel exterior, preset automatic alarm tracking around set point, 3 coated steel wire shelves, manual defrost, variable speed compressor, R600a natural refrigerant. 115V/60/1 electrical. Fits below standard 36.00" (91.4 cm) counter.

For additional product information, request form# 9050.


See page 30 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Hinging | Keypad | Door style | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | Net price |
|-------------|-----------------------------|---------|--------|---------------|------------------|------------------|-------------------|----------------------------|-----------|
| FZRNAT5-SD | 5.0 (142 L) | right | no | painted steel | 23.84 (60.6) | 24.50" (62.2) | 34.10 (86.6) | 130 (59) | \$2,795 |


Upright freezers

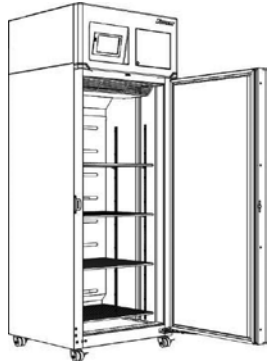


FZR20-LB

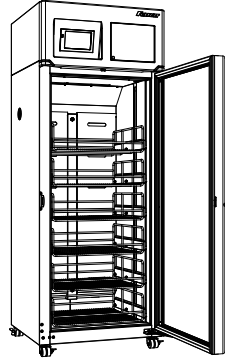


FZRVAC20/25-LB with additional shelf accessory



FZRMD24

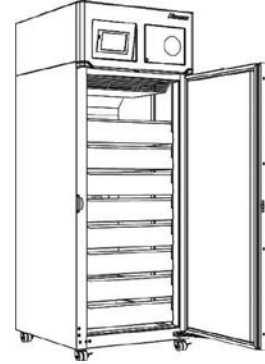

FZR25-PL



FZRDCMD17

FZR20-LB and FZR25-LB single door upright freezers for laboratory and pharmacy

Medical-grade -30 C laboratory and pharmacy freezers for critical product storage. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right or left-hinged, heavy-duty, insulated stainless steel door with ADA-compliant full length locking handle. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves standard.

For additional product information, request form# 8065 for FZR20 and 8070 for FZR25.

See page 31 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Storage system | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|-----------------|--------------------------|----------------|---------|------------|-------------|--------|---------------|---------------|----------------|-------------------------|-----------------|
| FZR20-LB-RHT00S | 19.7 (558) | 4 shelves | right | stainless | yes | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 480 (218) | Contact factory |
| FZR25-LB-RHT00S | 24.6 (697) | 4 shelves | right | stainless | yes | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 480 (218) | Contact factory |
| FZR20-LB-RHTKPS | 19.7 (558) | 4 shelves | right | stainless | yes | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 480 (218) | Contact factory |
| FZR25-LB-RHTKPS | 24.6 (697) | 4 shelves | right | stainless | yes | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 480 (218) | Contact factory |
| FZR20-LB-LHT00S | 19.7 (558) | 4 shelves | left | stainless | yes | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 480 (218) | Contact factory |
| FZR25-LB-LHT00S | 24.6 (697) | 4 shelves | left | stainless | yes | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 480 (218) | Contact factory |
| FZR20-LB-LHTKPS | 19.7 (558) | 4 shelves | left | stainless | yes | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 480 (218) | Contact factory |
| FZR25-LB-LHTKPS | 24.6 (697) | 4 shelves | left | stainless | yes | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 480 (218) | Contact factory |

FZRVAC20-LB and FZRVAC25-LB single door upright NSF 456 certified vaccine freezers

Medical-grade NSF/ANSI 456 certified vaccine -30 C freezers for laboratory and pharmacy. Stainless steel interior/exterior with top temperature probe and 16 oz bottle of glycerine. Right-hinged, heavy-duty, insulated stainless steel door with ADA-compliant full length locking handle. External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 4 epoxy-coated shelves standard.

For additional product information, request form# 9035.

See page 31 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | Storage system | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|--------------------|--------------------------|----------------|---------|------------|-------------|--------|---------------|---------------|----------------|-------------------------|-----------------|
| FZRVAC20-LB-RHT00S | 19.7 (558) | 4 shelves | right | stainless | yes | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 480 (218) | Contact factory |
| FZRVAC25-LB-RHT00S | 24.6 (697) | 4 shelves | right | stainless | yes | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 480 (218) | Contact factory |

FZRMD24 -30 C single door upright freezer for laboratory

PHCbi brand high performance biomedical freezer, 24.4 cu ft capacity, -18 C to -40 C temperature range, solid door, 4 adjustable shelves, microprocessor controller with digital display. High/low temperature, power failure and door alarming. 115V/60/1 electrical. ENERGY STAR certified.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|-------------|--------------------------|----------------|---------------|---------------|----------------|-------------------------|-----------------|
| FZRMD24 | 24.4 (690) | 4 shelves | 30.30 (77.0) | 32.70 (83.0) | 77.00 (195.5) | 568 (258) | Contact factory |

FZR20 and FZR25 single door upright freezers for plasma

Plasma freezers meet AABB and FDA requirements for storage of blood plasma at -30 C. Stainless steel interior/exterior with top and bottom temperature probes and 16 oz bottle of glycerine. Right-hinged, heavy-duty, insulated stainless steel door with ADA-compliant full length locking handle (left-hinged door available – must be specified at time of order). External 7" touchscreen LCD user interface with integral data and event logging, user-programmable temperature display and integral alarming functions. 115V/60/1 (103-132V) electrical. 6.00" (15.24 cm) chart recorder and 8 stainless steel, full-extension drawers standard.

For additional product information, request form# 8080.

See page 31 for additional accessory information.

| Item number | Cubic capacity cu ft (L) | FFP ¹ cartons (5"x8"x1.13") | Storage system | Hinging | Door style | Heated door | Keypad | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|-----------------|--------------------------|--|----------------|---------|------------|-------------|--------|---------------|---------------|----------------|-------------------------|-----------------|
| FZR20-PL-RHT00S | 19.7 (558) | 352 | 8 drawers | right | stainless | yes | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 568 (258) | Contact factory |
| FZR25-PL-RHT00S | 24.6 (697) | 472 | 8 drawers | right | stainless | yes | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 628 (285) | Contact factory |
| FZR20-PL-RHTKPS | 19.7 (558) | 352 | 8 drawers | right | stainless | yes | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 568 (258) | Contact factory |
| FZR25-PL-RHTKPS | 24.6 (697) | 472 | 8 drawers | right | stainless | yes | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 628 (285) | Contact factory |
| FZR20-PL-LHT00S | 19.7 (558) | 352 | 8 drawers | left | stainless | yes | no | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 568 (258) | Contact factory |
| FZR25-PL-LHT00S | 24.6 (697) | 472 | 8 drawers | left | stainless | yes | no | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 628 (285) | Contact factory |
| FZR20-PL-LHTKPS | 19.7 (558) | 352 | 8 drawers | left | stainless | yes | yes | 29.75 (75.6) | 30.50 (77.5) | 79.50 (201.9) | 568 (258) | Contact factory |
| FZR25-PL-LHTKPS | 24.6 (697) | 472 | 8 drawers | left | stainless | yes | yes | 29.75 (75.6) | 36.50 (92.7) | 79.50 (201.9) | 628 (285) | Contact factory |


¹ Fresh frozen plasma.

FZR8-PC plasma chiller

High performance -40 C to -40 F plasma chiller with touchscreen temperature controller and alarms. Stainless steel AISI 304 interior and exterior construction. 220V/60/3 electrical. 4 casters and 8 shelves.

Intended for use as a rapid freezer. This is not intended for long-term storage.

For additional product information, request form# 8930.



FZR8-PC

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Approx. ship wt lb (kg) | List price |
|-------------|------------------------------|----------------|---------------|---------------|----------------|-------------------------|-----------------|
| FZR8-PC | 7.5 cu ft (212) (72) bags | 8 shelves | 31.50 (80.0) | 32.88 (83.5) | 77.31 (196.4) | 541 (245) | Contact factory |


FZRDCMD17 dual chamber biomedical ECO upright freezer

PHCbi brand -40 C biomedical ECO dual chamber freezer, 16.9 cu ft capacity (8.46 cu ft per chamber), -20 C to -40 C temperature range, solid doors, 6 shelves (4 adjustable), microprocessor controller with LED display. Manual defrost function. High/low temperature, power failure alarming. ENERGY STAR certified.


For additional product information, request form# 12618.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|-------------|--------------------------|----------------|---------------|---------------|----------------|---------|-------------------------|-----------------|
| FZRDCMD17 | 16.9 (479) | 6 shelves | 31.20 (79.3) | 30.30 (77.0) | 70.90 (180.1) | 115/60 | 410 (186) | Contact factory |


Combination refrigerator/freezer



REFFZR9



REFFZR16

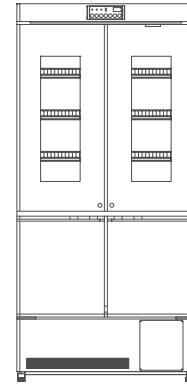

REFFZR21

REFFZR9 pharmaceutical combination refrigerator and freezer

Model REFFZR9-GS. PHCbi brand pharmaceutical combination 6.3 cu ft refrigerator (+2 C to +14 C) and 2.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, glass door on refrigerator, solid door on freezer, 3 glass shelves in refrigerator/1 coated wire shelf in freezer.

Model REFFZR9-SS. PHCbi brand pharmaceutical combination 6.3 cu ft refrigerator (+2 C to +14 C) and 2.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, solid door on refrigerator and freezer, 3 glass shelves in refrigerator/1 coated wire shelf in freezer.

For additional product information, request form# 12839.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|-------------|--|--|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| REFFZR9 | 6.3 (178) refrigerator 2.8 (79) freezer | 3 glass shelves in refrigerator 1 wire shelf in freezer | 20.00 (50.8) | 25.00 (63.5) | 71.20 (180.1) | 115/60 | 210 (95) | Contact factory |

REFFZR16 pharmaceutical combination refrigerator and freezer

Model REFFZR16-GS. PHCbi brand pharmaceutical combination 11.5 cu ft refrigerator (+2 C to +14 C) and 4.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, glass double doors on refrigerator, solid double doors on freezer, 3 adjustable shelves in refrigerator/2 shelves in freezer, microprocessor controller with softkey interface and OLED display. High/low temperature, power, sensor and door alarms.

Model REFFZR16-SS. PHCbi brand pharmaceutical combination 11.5 cu ft refrigerator (+2 C to +14 C) and 4.8 cu ft freezer (-30 C to -20 C), independent refrigeration systems, solid double doors on refrigerator and freezer, 3 adjustable shelves in refrigerator/2 shelves in freezer, microprocessor controller with LED display. High/low temperature, power, sensor and door alarms.

For additional product information, request form# 12507.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|-------------|--|---|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| REFFZR16 | 11.5 (326) refrigerator 4.8 (136) freezer | 3 shelves in refrigerator 2 shelves in freezer | 31.50 (80.0) | 25.20 (64.0) | 71.30 (181.1) | 115/60 | 337 (153) | Contact factory |


REFFZR21 pharmaceutical combination refrigerator and freezer

PHCbi brand pharmaceutical combination 14.7 cu ft refrigerator (+2 C to +14 C) and 6.2 cu ft freezer (-30 C to -20 C), independent refrigeration systems, glass double doors on refrigerator, solid double doors on freezer, 3 adjustable shelves in refrigerator/2 shelves in freezer, microprocessor controller with softkey interface and OLED display. High/low temperature, power, sensor and door alarms.


For additional product information, request form# 12620.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|-------------|--|---|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| REFFZR21-GS | 14.7 (415) refrigerator 6.2 (176) freezer | 3 shelves in refrigerator 2 shelves in freezer | 35.40 (90.0) | 28.10 (71.5) | 75.20 (191.0) | 115/60 | 439 (199) | Contact factory |

Ultra-low chest freezers

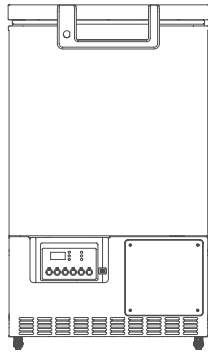

FZRC3

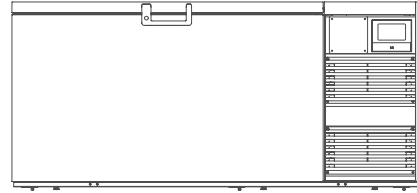

FZRC25

FZRC3-80 C ultra-low temperature chest freezer

PHCbi brand VIP Series -80 C ultra-low temperature chest freezer, 3.0 cu ft capacity, -60 C to -80 C temperature range, insulated locking lid with sub for additional temperature protection, microprocessor controller with LED display. High/low temperature, power failure alarming. ENERGY STAR certified.

For additional product information, request form# 12599.

| Item number | Cubic capacity cu ft (L) | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|---------------|-----------------------------|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| FZRC3-ULT-115 | 3.0 (85) | 21.70 (55.0) | 27.00 (68.5) | 37.20 (94.5) | 115/60 | 190 (86) | Contact factory |


FZRC25-86 C ultra-low temperature chest freezer

PHCbi brand TwinGuard Series -86 C ultra-low temperature chest freezer with dual cooling system, 25.3 cu ft capacity, -50 C to -86 C temperature range, insulated locking lid with sub lid for additional temperature protection, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12684.

| Item number | Cubic capacity cu ft (L) | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|----------------|-----------------------------|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| FZRC25-ULT-220 | 25.3 (708) | 90.60 (230.0) | 37.60 (95.5) | 42.10 (107.0) | 220/60 | 807 (366) | Contact factory |

Ultra-low upright freezers

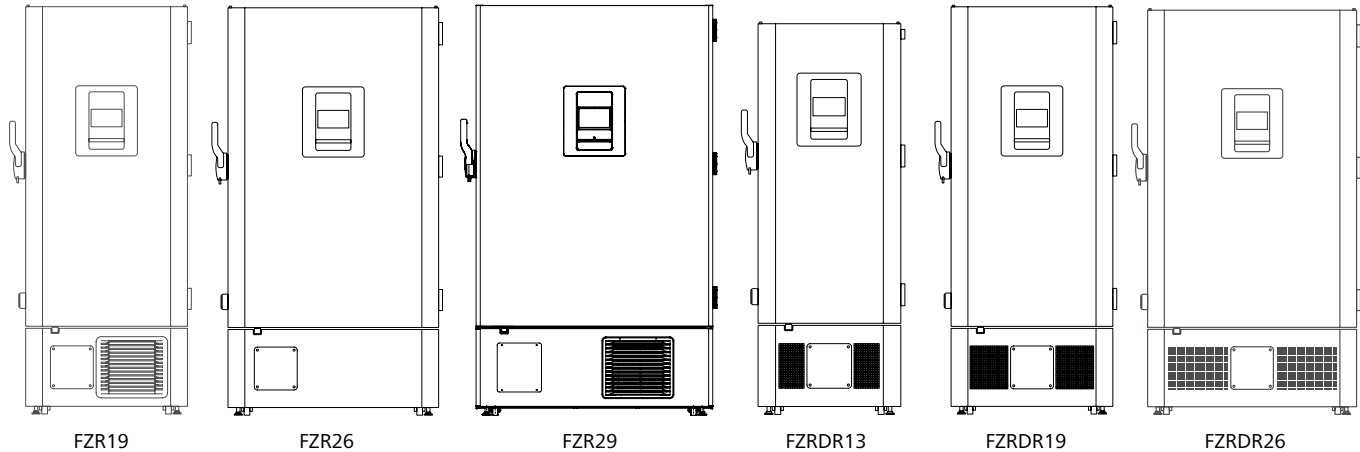

FZR19 -86 C ultra-low temperature VIP ECO upright freezer

PHCbi brand VIP ECO Series -86 C ultra-low temperature upright freezer, 18.6 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms. ENERGY STAR certified.

For additional product information, request form# 12600.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|---------------|-----------------------------|----------------|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| FZR19-ULT-115 | 18.6 (528) | 3 shelves | 31.10 (79.0) | 34.70 (88.2) | 78.50 (199.3) | 115/60 | 628 (285) | Contact factory |
| FZR19-ULT-220 | 18.6 (528) | 3 shelves | 31.10 (79.0) | 34.70 (88.2) | 78.50 (199.3) | 220/60 | 628 (285) | Contact factory |

FZR26 -86 C ultra-low temperature VIP ECO upright freezer

PHCbi brand VIP ECO Series -86 C ultra-low temperature upright freezer, 25.7 cu ft capacity, -40 C to -90 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms. ENERGY STAR certified.

For additional product information, request form# 12506.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|---------------|-----------------------------|----------------|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| FZR26-ULT-115 | 25.7 (729) | 3 shelves | 25.7 (729) | 36.80 (93.5) | 78.50 (199.3) | 115/60 | 827 (375) | Contact factory |
| FZR26-ULT-220 | 25.7 (729) | 3 shelves | 25.7 (729) | 36.80 (93.5) | 78.50 (199.3) | 220/60 | 827 (375) | Contact factory |

FZR29 -86 C ultra-low temperature VIP ECO upright freezer

PHCbi brand VIP ECO Series -86 C ultra-low temperature upright freezer, 29.8 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms. ENERGY STAR certified.

For additional product information, request form# 12601.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|---------------|-----------------------------|----------------|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| FZR29-ULT-115 | 29.8 (845) | 3 shelves | 45.30 (115.0) | 34.30 (87.0) | 78.50 (199.3) | 115/60 | 855 (387) | Contact factory |

FZRDR13 -86 C ultra-low temperature TwinGuard upright freezer

PHCbi brand TwinGuard Series -86 C ultra-low temperature upright freezer with dual cooling system, 12.7 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 inner insulated doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12615.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|-----------------|-----------------------------|----------------|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| FZRDR13-ULT-220 | 12.7 (360) | 3 shelves | 26.40 (67.0) | 34.70 (88.2) | 72.40 (184.0) | 220/60 | 556 (252) | Contact factory |

FZRDR19 -86 C ultra-low temperature TwinGuard upright freezer

PHCbi brand TwinGuard Series -86 C ultra-low temperature upright freezer with dual cooling system, 18.6 cu ft capacity, -50 C to -86 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12616.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|-----------------|-----------------------------|----------------|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| FZRDR19-ULT-220 | 18.6 (528) | 3 shelves | 31.10 (79.0) | 34.70 (88.2) | 78.50 (199.3) | 220/60 | 723 (328) | Contact factory |


FZRDR26 -86 C ultra-low temperature TwinGuard upright freezer

PHCbi brand TwinGuard Series -86 C ultra-low temperature upright freezer with dual cooling system, -50 C to -86 C temperature range, 25.7 cu ft capacity, 1 locking outer door with 2 insulated inner doors for additional temperature protection, 3 adjustable shelves, microprocessor controller with touchscreen display. Comprehensive alarm system with audible and visual alarms.


For additional product information, request form# 12617.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|-----------------|-----------------------------|----------------|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| FZRDR26-ULT-220 | 25.7 (729) | 3 shelves | 40.60 (103.0) | 36.8 (93.5) | 78.50 (199.3) | 220/60 | 827 (375) | Contact factory |

Cryogenic freezers and CO2 incubators

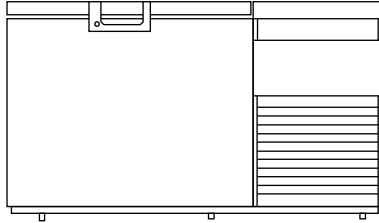

FZRC8

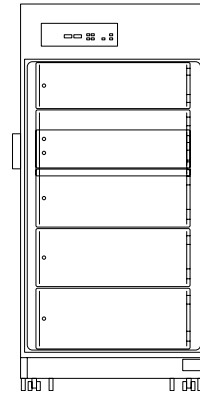

CO2INC30-G

FZRC8 -150 C cryogenic chest freezer

PHCbi brand -150 C cryogenic chest freezer with autocascade refrigeration system, 8.2 cu ft capacity, -125 C to -150 C temperature range, 1 locking outer door with 2 insulated inner doors for additional temperature protection, microprocessor controller with LCD display. High/low temperature, sensor, power, and lid alarms.

For additional product information, request form# 12602.

| Item number | Cubic capacity cu ft (L) | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|-------------|-----------------------------|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| FZRC8-220 | 8.2 (232.2) | 68.10 (173.0) | 30.10 (76.5) | 39.80 (101.0) | 220/60 | 961 (436) | Contact factory |

CO2INC30 Reach-In CO2 incubator

PHCbi brand Reach-in CO2 incubator, 30.1 cu ft, glass door, normal (80% RH or above) or high (90% RH or above) humidity mode, microprocessor controller with 2 LED displays (temperature and CO2), 5 shelves. Comprehensive alarm system with audible and visual alarms.

For additional product information, request form# 12621.

| Item number | Cubic capacity cu ft (L) | Storage system | Width in (cm) | Depth in (cm) | Height in (cm) | Voltage | Approx. ship wt lb (kg) | List price |
|-------------|-----------------------------|----------------|------------------|------------------|-------------------|---------|----------------------------|-----------------|
| CO2INC30-G | 30.1 (851) | 5 shelves | 38.60 (98.6) | 37.2 (94.5) | 80.3 (204.0) | 115/60 | 694 (315) | Contact factory |

Refrigerator and freezer accessories

Countertop refrigerator and freezer accessories and warranties

| Item number | Description | List price |
|-------------|---|------------|
| 00969931 | Organizing bins, set of 6 | \$140 |
| 00969956 | Additional shelf (1) | \$140 |
| 00959296 | Glycerine, 16 oz | \$110 |
| 00969949 | Wall mount kit | \$850 |
| 01111947 | Casters (set of 4) | \$490 |
| 01184845 | Pedestal, 2.00" (5.08 cm) | \$770 |
| 01025899 | Pedestal, fan-assist, 4.50" (11.43 cm) | \$560 |
| 01025881 | Pedestal, 12.00" (30.5 cm) | \$560 |
| 01100742 | Stacking kit (countertop on countertop) | \$780 |
| 01100759 | Stacking kit (countertop on Performance Plus undercounter) | \$780 |
| 01142363 | Stacking kit (countertop on REF/FZR Series undercounter) | \$780 |
| 01092022 | NO/NC dry contacts for connection to remote alarm systems | \$90 |
| 00112185 | Temperature alarm with dry contacts for remote alarming | \$860 |
| 00168674 | Temperature surveillance module (includes alarm, 6.00" (15.24 cm) chart recorder, remote contacts) | \$2,770 |
| 01077841 | Replacement NTC probe with certificate of NIST-traceable calibration | \$340 |
| 01528512 | DicksonOne VFC-compliant freestanding display data logger with Wi-Fi and Ethernet capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud. | \$1,240 |
| 01528538 | DicksonOne VFC-compliant freestanding touchscreen data logger with Power Over Ethernet and Wi-Fi capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud. | \$1,840 |
| 01539691 | Ambient temperature and humidity sensor, right angle, for use with DicksonOne freestanding display and touchscreen data loggers | \$250 |
| Item number | Description | Net price |
| EW12 | Optional extended one year warranty on parts and labor only (available with new equipment only) | \$150 |
| EW36 | Optional extended three year warranty on parts and labor only (available with new equipment only) | \$300 |

Undercounter refrigerator and freezer accessories and warranties

| Item number | Description | List price |
|-------------|---|------------|
| 01059484 | Additional shelf (1), Performance Plus | \$200 |
| 01462316 | Additional shelves (2), REFADV5-SD | \$100 |
| 01053644 | Drawer accessory kit (1 drawer, glide hardware, flush front panel), Performance Plus. Not for use with VAC models. | \$430 |
| 01067750 | Drawer accessory kit (2 drawers, glide hardware, flush front panel), Performance Plus. Not for use with VAC models. | \$580 |
| 00959296 | Glycerine, 16 oz | \$110 |
| 00153700 | Wall mount kit, Performance Plus | \$610 |
| 01059104 | Seismic bracket kit, Performance Plus | \$520 |
| 01053636 | Casters (set of 4 with spacers), Performance Plus | \$380 |
| 01059120 | Pedestal base, 23.75" wide x 24.00" deep x 17.00" high (60.3 x 61.0 x 43.2 cm), stainless, Performance Plus | \$1,190 |
| 01528157 | Stacking kit (Edge Series on Edge Series) | \$760 |
| 01054006 | Stacking kit (Performance Plus on Performance Plus) | \$760 |
| 01067172 | Stacking kit (REF/FZR Series on Performance Plus) | \$780 |
| 01059096 | Universal ADC-compatible bracket (for all medication dispensing system locks), Performance Plus | \$180 |
| 01092022 | NO/NC dry contacts for connection to remote alarm systems, Performance Plus | \$90 |
| 00112185 | Temperature alarm with dry contacts for remote alarming | \$860 |
| 00168674 | Temperature surveillance module (includes alarm, 6.00" (15.24 cm) chart recorder, remote contacts) | \$2,770 |
| 01077841 | Replacement NTC probe with certificate of NIST-traceable calibration | \$340 |
| 01528512 | DicksonOne VFC-compliant freestanding display data logger with Wi-Fi and Ethernet capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud. | \$1,240 |
| 01528538 | DicksonOne VFC-compliant freestanding touchscreen data logger with Power Over Ethernet and Wi-Fi capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud. | \$1,840 |
| 01539691 | Ambient temperature and humidity sensor, right angle, for use with DicksonOne freestanding display and touchscreen data loggers | \$250 |
| Item number | Description | Net price |
| EW12 | Optional extended one year warranty on parts and labor only (available with new equipment only) | \$300 |
| EW36 | Optional extended three year warranty on parts and labor only (available with new equipment only) | \$600 |

Upright refrigerator and freezer accessories and warranties

| Item number | Description | List price |
|-------------|---|------------|
| 01548791 | Replacement CRS (Complete Refrigeration System) module, all Infinty Series models (REF12i, REF20i, REF25i) | \$4,300 |
| 01312529 | Replacement CRS (Complete Refrigeration System) module, REF12 | \$2,730 |
| 01147891 | Replacement high-side refrigeration module (complete condensing unit), REF45, REFVAC45 | \$3,470 |
| 01007004 | Replacement CRS (Complete Refrigeration System) module, FZR20/25 | \$7,150 |
| 01059484 | Additional shelf kit (includes 1 shelf and 4 screws), REF12i | \$200 |
| 01548809 | Additional shelf kit (includes 1 shelf and 4 screws), REF20i | \$250 |
| 01548817 | Additional shelf kit (includes 1 shelf and 4 screws), REF25i | \$250 |
| 01461268 | Additional shelf (1), REFVAC20-LB, FZRVAC20-LB | \$200 |
| 01460708 | Additional shelf (1), REFVAC25/45-LB, FZRVAC25-LB | \$200 |
| 01311976 | Additional shelf (1), REF12-LB | \$200 |
| 00927251 | Additional shelves (2), REF20-LB, FZR20-LB | \$380 |
| 00927269 | Additional shelves (2), REF25/45-LB, FZR25-LB | \$380 |
| 01543925 | Basket kit (includes 1 basket, 8 rollers, 4 screws and nuts and 2 slides), REF12i | \$400 |
| 01548825 | Basket kit (includes 1 basket, 8 rollers, 8 screws and nuts and 2 slides), REF20i | \$400 |
| 01548833 | Basket kit (includes 1 basket, 8 rollers, 8 screws and nuts and 2 slides), REF25i | \$400 |
| 01543933 | Drawer kit (includes 1 drawer, 8 rollers, 4 screws and nuts and 2 slides), REF12i | \$420 |
| 01548841 | Drawer kit (includes 1 drawer, 8 rollers, 8 screws and nuts and 2 slides), REF20i | \$420 |
| 01548858 | Drawer kit (includes 1 drawer, 8 rollers, 8 screws and nuts and 2 slides), REF25i | \$420 |
| 00927202 | Pyxis [®] compatible door bracket, REF20/25/45 | \$430 |
| 00978296 | medDISPENSE [®] compatible door bracket, REF20/25/45, FZR20/25 | \$430 |
| 00966432 | Omnicell [®] compatible door bracket, REF20/25/45 | \$430 |
| 01319441 | Wall bracket kit, seismic anchoring, REF12 | \$330 |
| 01543883 | Wall bracket kit, seismic anchoring, REF12i | \$320 |
| 00927194 | Wall bracket kit, seismic anchoring, REF20i/25i, REF20/25/45, FZR20/25 | \$330 |
| 01140458 | Replacement "quick-connect" RTD probe with certificate of NIST-traceable calibration, REF12, REF20/25, REFVAC20/25, REF45 and REFVAC45 before serial number Q86639, FZR20/25 and FZRVAC20/25 | \$580 |
| 01540640 | Replacement "quick connect" RTD probe with certificate of NIST-traceable calibration, REF45 and REFVAC45 after serial number Q86638 | \$580 |
| 01528512 | DicksonOne VFC-compliant freestanding display data logger with Wi-Fi and Ethernet capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud. | \$1,240 |
| 01528538 | DicksonOne VFC-compliant freestanding touchscreen data logger with Power Over Ethernet and Wi-Fi capability for use with any refrigerator or freezer. NOTE: Subscription from Dickson required to access data on the cloud. | \$1,840 |
| 01539691 | Ambient temperature and humidity sensor, right angle, for use with DicksonOne freestanding display and touchscreen data loggers | \$250 |

| Item number | Description | Net price |
|-------------|--|-----------|
| EW12 | Optional extended one year warranty on parts and labor only, REF12 (available with new equipment only) | \$450 |
| EW36 | Optional extended three year warranty on parts and labor only, REF12 (available with new equipment only) | \$900 |
| EW12 | Optional extended one year warranty on parts and labor only, REF20/25 (available with new equipment only) | \$450 |
| EW36 | Optional extended three year warranty on parts and labor only, REF20/25 (available with new equipment only) | \$900 |
| EW12 | Optional extended one year warranty on parts and labor only, REF45 (available with new equipment only) | \$600 |
| EW36 | Optional extended three year warranty on parts and labor only, REF45 (available with new equipment only) | \$1,300 |
| EW12 | Optional extended one year warranty on parts and labor only, FZR20/FZR25 (available with new equipment only) | \$600 |
| EW36 | Optional extended three year warranty on parts and labor, FZR20/FZR25 (available with new equipment only) | \$1,200 |

Ice and water dispensers

Follett ice and water dispensers are chosen by more healthcare facilities than any other brand for good reason. We offer the industry's largest selection, with more than 30 sizes and configurations to meet the needs of virtually any application. Designed specifically for healthcare, Follett dispensers offer 12, 25, 50 or 90 lb of storage in attractive, space-saving cabinets, with customer-valued features, exceptional reliability, and after-the-sale service and support.

Warranty

Symphony Plus™ ice and water dispensers

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 3 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 3 year period are covered under this warranty. For products sold outside of the U.S., the labor warranty will apply only to equipment sold and serviced through a Follett Authorized Distributor in its designated territory.

The compressor shall be covered for an additional 2 years (parts only), for a total of 5 years from the date of installation.

WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett.
- Customer has documented record of preventive maintenance and cleaning of the machine every 6 months according to the instructions in the dispenser Installation, Operations and Service Manual.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond the control of Follett are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective upon examination.
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.

This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship.

Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.

Symphony Plus ice and water dispensers – 12 series


Countertop and wall mount ice and water dispensers with 12 lb (5.4 kg) of storage. 12CI and C12CI integral ice machine uses R404a refrigerant and produces up to 425 lb (193 kg) of ice per day. E12CI integral ice machine uses R290 refrigerant and produces up to 388 lb (176 kg) of ice per day. C12CI and E12CI models are not for use in the United States.

All models feature stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing. Wall mount models only available with SensorSAFE infrared dispensing.


For additional product information, request form# 6620 for 12CI models, 6625 for 12HI models, 6940 for C12CI models, or 1000 for E12CI.

12 series accessories **List price**
 4.00" (10.16 cm) leg kit for 12CI (item# AF10LBLEGS) \$280

See page 38 for additional accessory information.



Countertop with integral ice machine



Wall mount with integral ice machine (SensorSAFE dispensing only)

| Item number | Configuration | Dispense | Width in (cm) | Depth in (cm) | Height in (cm) | Condenser | Ice machine location | Voltage | Approx. ship wt lb (kg) | List price |
|--|-------------------------|------------|---------------|---------------|----------------|------------|----------------------|-----------------------|-------------------------|------------|
| 12CI425 series ice and water dispensers | | | | | | | | | | |
| 12CI425A-S | Countertop | SensorSAFE | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 115/60/1 | 199 (90) | \$11,455 |
| 12CI425A-L | Countertop | Lever | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 115/60/1 | 199 (90) | \$11,455 |
| C12CI425A-S ¹ | Countertop | SensorSAFE | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 220/60/1 ¹ | 199 (90) | \$11,665 |
| C12CI425A-L ¹ | Countertop | Lever | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 220/60/1 ¹ | 199 (90) | \$11,665 |
| 12HI425A-S0-00 | Wall mount ² | SensorSAFE | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 115/60/1 | 179 (81) | \$14,535 |
| 12HI425A-S0-DP | Wall mount ² | SensorSAFE | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 115/60/1 | 184 (84) | \$14,980 |

| E12CI414 series ice and water dispensers | | | | | | | | | | |
|---|------------|------------|--------------|--------------|--------------|------------|----------|-----------------------|----------|----------|
| E12CI414A-S ¹ | Countertop | SensorSAFE | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 230/50/1 ¹ | 199 (90) | \$11,665 |
| E12CI414A-L ¹ | Countertop | Lever | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 230/50/1 ¹ | 199 (90) | \$11,665 |

¹ Models not for use in the United States.

² 12HI425A-S0-DP wall mount unit configured with drain pan. 12HI425A-S0-00 wall mount unit configured without drain pan.

Symphony Plus ice-only dispensers – 12 series


Countertop ice dispensers with 12 lb (5.4 kg) of storage. Ice-only; no water. 12CI and C12CI integral ice machine uses R404a refrigerant and produces up to 425 lb (193 kg) of ice per day. E12CI integral ice machine uses R290 refrigerant and produces up to 388 lb (176 kg) of ice per day. C12CI and E12CI models are not for use in the United States.

All models feature stainless steel cabinet with accent trim. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.

For additional product information, request form# 6620 for 12CI models, 6625 for 12HI models, 6940 for C12CI models, or 1000 for E12CI.

12 series accessories **List price**
 4.00" (10.16 cm) leg kit for 12CI (item# AF10LBLEGS) \$280

See page 38 for additional accessory information.




Countertop with integral ice machine

| Item number | Configuration | Dispense | Width in (cm) | Depth in (cm) | Height in (cm) | Condenser | Ice machine location | Voltage | Approx. ship wt lb (kg) | List price |
|---|---------------|------------|---------------|---------------|----------------|------------|----------------------|-----------------------|-------------------------|------------|
| 12CI425 series ice-only dispensers | | | | | | | | | | |
| 12CI425A-SI | Countertop | SensorSAFE | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 115/60/1 | 199 (90) | \$11,455 |
| 12CI425A-LI | Countertop | Lever | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 115/60/1 | 199 (90) | \$11,455 |
| C12CI425A-SI ¹ | Countertop | SensorSAFE | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 220/60/1 ¹ | 199 (90) | \$11,665 |
| C12CI425A-LI ¹ | Countertop | Lever | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 220/60/1 ¹ | 199 (90) | \$11,665 |


| E12CI414 series ice-only dispensers | | | | | | | | | | |
|--|------------|------------|--------------|--------------|--------------|------------|----------|-----------------------|----------|----------|
| E12CI414A-SI ¹ | Countertop | SensorSAFE | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 230/50/1 ¹ | 199 (90) | \$11,665 |
| E12CI414A-LI ¹ | Countertop | Lever | 16.12 (40.9) | 23.50 (59.7) | 32.50 (82.6) | air-cooled | integral | 230/50/1 ¹ | 199 (90) | \$11,665 |

¹ Models not for use in the United States.


Symphony Plus ice and water dispensers with removable ice machine – 25 and 50 series



Countertop with removable ice machine behind splash panel



Wall mount with removable ice machine behind splash panel



Freestanding with removable ice machine in base

Countertop, freestanding and wall mount ice and water dispensers with 25 lb (11.3 kg) or 50 lb (22.7 kg) of storage. Removable icemaking module uses R404a refrigerant and produces up to 425 lb (193.0 kg) of ice per day. Stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing. Wall mount models only available with SensorSAFE infrared dispensing.

For additional product information, request form# 6630 for 25CI and 50CI models, 6635 for 25HI and 50HI models, 6650 for 25FB and 50FB models, or 7090 for C25CI and C50CI models.

25 and 50 series accessories

List price

- 4.00" (10.16 cm) leg kit for 25CI and 50CI (item# 00188417) \$290
- Caster kit for 25FB and 50FB (item# AFCASTERKIT) \$630

See page 38 for additional accessory information.

| Item number | Configuration | Dispense | Width in (cm) | Depth in (cm) | Height in (cm) | Condenser | Ice machine location | Voltage | Approx. ship wt lb (kg) | List price |
|---|---------------------------|------------|---------------|---------------|----------------|--------------|----------------------|-----------------------|-------------------------|------------|
| 25 series ice and water dispensers | | | | | | | | | | |
| 25CI425A-S | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | air-cooled | behind splash panel | 115/60/1 | 240 (109) | \$15,800 |
| 25CI425A-L | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | air-cooled | behind splash panel | 115/60/1 | 240 (109) | \$15,800 |
| C25CI425A-S ¹ | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | air-cooled | behind splash panel | 220/60/1 ¹ | 240 (109) | \$16,005 |
| C25CI425A-L ¹ | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | air-cooled | behind splash panel | 220/60/1 ¹ | 240 (109) | \$16,005 |
| 25CI425W-S | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | water-cooled | behind splash panel | 115/60/1 | 240 (109) | \$15,800 |
| 25CI425W-L | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | water-cooled | behind splash panel | 115/60/1 | 240 (109) | \$15,800 |
| 25HI425A-S0-00 | Wall mount ² | SensorSAFE | 21.50 (54.6) | 24.50 (62.2) | 36.50 (92.7) | air-cooled | behind splash panel | 115/60/1 | 230 (104) | \$18,465 |
| 25HI425A-S0-DP | Wall mount ² | SensorSAFE | 21.50 (54.6) | 24.50 (62.2) | 36.50 (92.7) | air-cooled | behind splash panel | 115/60/1 | 235 (107) | \$19,490 |
| 25FB425A-S | Freestanding ³ | SensorSAFE | 21.00 (53.3) | 24.75 (62.9) | 62.88 (159.7) | air-cooled | base mounted | 115/60/1 | 250 (113) | \$17,310 |
| 25FB425A-L | Freestanding ³ | Lever | 21.00 (53.3) | 24.75 (62.9) | 62.88 (159.7) | air-cooled | base mounted | 115/60/1 | 250 (113) | \$17,310 |
| 25FB425W-S | Freestanding ³ | SensorSAFE | 21.00 (53.3) | 24.75 (62.9) | 62.88 (159.7) | water-cooled | base mounted | 115/60/1 | 250 (113) | \$17,310 |
| 25FB425W-L | Freestanding ³ | Lever | 21.00 (53.3) | 24.75 (62.9) | 62.88 (159.7) | water-cooled | base mounted | 115/60/1 | 250 (113) | \$17,310 |
| 50 series ice and water dispensers | | | | | | | | | | |
| 50CI425A-S | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | air-cooled | behind splash panel | 115/60/1 | 245 (111) | \$16,950 |
| 50CI425A-L | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | air-cooled | behind splash panel | 115/60/1 | 245 (111) | \$16,950 |
| C50CI425A-S ¹ | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | air-cooled | behind splash panel | 220/60/1 ¹ | 245 (111) | \$17,155 |
| C50CI425A-L ¹ | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | air-cooled | behind splash panel | 220/60/1 ¹ | 245 (111) | \$17,155 |
| 50CI425W-S | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | water-cooled | behind splash panel | 115/60/1 | 245 (111) | \$16,950 |
| 50CI425W-L | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | water-cooled | behind splash panel | 115/60/1 | 245 (111) | \$16,950 |
| 50HI425A-S0-00 | Wall mount ² | SensorSAFE | 21.50 (54.6) | 24.50 (62.2) | 40.50 (102.9) | air-cooled | behind splash panel | 115/60/1 | 234 (106) | \$19,945 |
| 50HI425A-S0-DP | Wall mount ² | SensorSAFE | 21.50 (54.6) | 24.50 (62.2) | 40.50 (102.9) | air-cooled | behind splash panel | 115/60/1 | 239 (108) | \$20,785 |
| 50FB425A-S | Freestanding ³ | SensorSAFE | 21.00 (53.3) | 24.75 (62.9) | 66.88 (169.9) | air-cooled | base mounted | 115/60/1 | 253 (115) | \$18,615 |
| 50FB425A-L | Freestanding ³ | Lever | 21.00 (53.3) | 24.75 (62.9) | 66.88 (169.9) | air-cooled | base mounted | 115/60/1 | 253 (115) | \$18,615 |
| 50FB425W-S | Freestanding ³ | SensorSAFE | 21.00 (53.3) | 24.75 (62.9) | 66.88 (169.9) | water-cooled | base mounted | 115/60/1 | 253 (115) | \$18,615 |
| 50FB425W-L | Freestanding ³ | Lever | 21.00 (53.3) | 24.75 (62.9) | 66.88 (169.9) | water-cooled | base mounted | 115/60/1 | 253 (115) | \$18,615 |

¹ Models not for use in the United States

² 25HI425A-S0-DP and 50HI425A-S0-DP wall mount units configured with drain pan. 25HI425A-S0-00 and 50HI425A-S0-00 wall mount units configured without drain pan.

³ Freestanding models include 6.00" (15.24 cm) adjustable legs.

Symphony Plus series ice-only dispensers – 25 and 50 series

Countertop and wall mount ice dispensers with 25 lb (11.3 kg) or 50 lb (22.7 kg) of storage. Integral ice machine uses R404a refrigerant and produces up to 425 lb (193.0 kg) of ice per day. Stainless steel cabinet with accent trim. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.


For additional product information, request form# 6630 for 25CI and 50CI models, 6635 for 25HI and 50HI models, or 7090 for C25CI and C50CI models.

25 and 50 series accessories


List price

4.00" (10.16 cm) leg kit for 25CI and 50CI (item# 00188417) \$290

See page 38 for additional accessory information.



Countertop with integral ice machine



Wall mount with integral ice machine (SensorSAFE dispensing only)

| Item number | Configuration | Dispense | Width in (cm) | Depth in (cm) | Height in (cm) | Condenser | Ice machine location | Voltage | Approx. ship wt lb (kg) | List price |
|--------------------------------------|-------------------------|------------|---------------|---------------|----------------|--------------|----------------------|-----------------------|-------------------------|------------|
| 25 series ice-only dispensers | | | | | | | | | | |
| 25CI425A-SI | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | air-cooled | behind splash panel | 115/60/1 | 240 (109) | \$15,800 |
| 25CI425A-LI | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | air-cooled | behind splash panel | 115/60/1 | 240 (109) | \$15,800 |
| C25CI425A-SI ¹ | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | air-cooled | behind splash panel | 220/60/1 ¹ | 240 (109) | \$15,800 |
| C25CI425A-LI ¹ | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | air-cooled | behind splash panel | 220/60/1 ¹ | 240 (109) | \$15,800 |
| 25CI425W-SI | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | water-cooled | behind splash panel | 115/60/1 | 240 (109) | \$15,800 |
| 25CI425W-LI | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 36.00 (91.4) | water-cooled | behind splash panel | 115/60/1 | 240 (109) | \$15,800 |
| 25HI425A-SI-00 | Wall mount ² | SensorSAFE | 21.50 (54.6) | 24.50 (62.2) | 36.50 (92.7) | air-cooled | behind splash panel | 115/60/1 | 230 (104) | \$18,465 |
| 25HI425A-SI-DP | Wall mount ² | SensorSAFE | 21.50 (54.6) | 24.50 (62.2) | 36.50 (92.7) | air-cooled | behind splash panel | 115/60/1 | 235 (107) | \$19,490 |
| 50 series ice-only dispensers | | | | | | | | | | |
| 50CI425A-SI | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | air-cooled | behind splash panel | 115/60/1 | 245 (111) | \$16,950 |
| 50CI425A-LI | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | air-cooled | behind splash panel | 115/60/1 | 245 (111) | \$16,950 |
| C50CI425A-SI ¹ | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | air-cooled | behind splash panel | 220/60/1 ¹ | 245 (111) | \$17,155 |
| C50CI425A-LI ¹ | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | air-cooled | behind splash panel | 220/60/1 ¹ | 245 (111) | \$17,155 |
| 50CI425W-SI | Countertop | SensorSAFE | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | water-cooled | behind splash panel | 115/60/1 | 245 (111) | \$16,950 |
| 50CI425W-LI | Countertop | Lever | 21.00 (53.3) | 24.00 (61.0) | 40.00 (101.6) | water-cooled | behind splash panel | 115/60/1 | 245 (111) | \$16,950 |
| 50HI425A-SI-00 | Wall mount ² | SensorSAFE | 21.50 (54.6) | 24.50 (62.2) | 40.50 (102.9) | air-cooled | behind splash panel | 115/60/1 | 234 (106) | \$19,945 |
| 50HI425A-SI-DP | Wall mount ² | SensorSAFE | 21.50 (54.6) | 24.50 (62.2) | 40.50 (102.9) | air-cooled | behind splash panel | 115/60/1 | 239 (108) | \$20,785 |

¹ Models not for use in the United States.

² 25HI425A-SI-DP and 50HI425A-SI-DP wall mount units configured with drain pan and 25HI425A-SI-00 and 50HI425A-SI-00 wall mount units configured without drain pan.


Symphony Plus ice and water dispensers with removable ice machine – 110 series

Countertop and freestanding ice and water dispensers with 90 lb (40.8 kg) of storage. Removable icemaking module produces up to 425 lb (193.0 kg) of ice per day. Stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.


For additional product information, request form# 6655 for 110CT models or 6670 for 110FB models.

110 series accessories **List price**
 Caster kit for 110FB (item# AFCASTERKIT)..... \$630

See page 38 for additional accessory information.



Countertop with top mounted removable ice machine



Freestanding with removable ice machine in base

| Item number | Configuration | Dispense | Width in (cm) | Depth in (cm) | Height in (cm) | Condenser | Ice machine location | Voltage | Approx. ship wt lb (kg) | List price |
|--|---------------------------|------------|---------------|---------------|----------------|--------------|----------------------|----------|-------------------------|------------|
| 110 series ice and water dispensers | | | | | | | | | | |
| 110CT425A-S | Countertop | SensorSAFE | 25.00 (63.5) | 29.00 (73.7) | 53.00 (134.6) | air-cooled | top mounted | 115/60/1 | 286 (130) | \$24,570 |
| 110CT425A-L | Countertop | Lever | 25.00 (63.5) | 29.00 (73.7) | 53.00 (134.6) | air-cooled | top mounted | 115/60/1 | 286 (130) | \$24,570 |
| 110CT425W-S | Countertop | SensorSAFE | 25.00 (63.5) | 29.00 (73.7) | 53.00 (134.6) | water-cooled | top mounted | 115/60/1 | 286 (130) | \$24,570 |
| 110CT425W-L | Countertop | Lever | 25.00 (63.5) | 29.00 (73.7) | 53.00 (134.6) | water-cooled | top mounted | 115/60/1 | 286 (130) | \$24,570 |
| 110FB425A-S | Freestanding ¹ | SensorSAFE | 25.00 (63.5) | 28.25 (71.8) | 68.12 (173.0) | air-cooled | base mounted | 115/60/1 | 285 (129) | \$27,085 |
| 110FB425A-L | Freestanding ¹ | Lever | 25.00 (63.5) | 28.25 (71.8) | 68.12 (173.0) | air-cooled | base mounted | 115/60/1 | 285 (129) | \$27,085 |
| 110FB425W-S | Freestanding ¹ | SensorSAFE | 25.00 (63.5) | 28.25 (71.8) | 68.12 (173.0) | water-cooled | base mounted | 115/60/1 | 285 (129) | \$27,085 |
| 110FB425W-L | Freestanding ¹ | Lever | 25.00 (63.5) | 28.25 (71.8) | 68.12 (173.0) | water-cooled | base mounted | 115/60/1 | 285 (129) | \$27,085 |


¹ Freestanding models include 6.00" (15.24 cm) adjustable legs.

Symphony Plus manual load ice and water dispensers – 110 series

Countertop manual fill ice and water dispensers with 110 lb (49.9 kg) of storage. Stainless steel cabinet with accent trim. Water station included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing.

For additional product information, request form# 6660.

See page 38 for additional accessory information.



Countertop, manual fill


| Item number | Configuration | Dispense | Width in (cm) | Depth in (cm) | Height in (cm) | Condenser | Ice machine location | Voltage | Approx. ship wt lb (kg) | List price |
|--|---------------|------------|---------------|---------------|----------------|-----------|----------------------|----------|-------------------------|------------|
| Manual fill 110 series ice and water dispensers | | | | | | | | | | |
| 110CM-NI-S ¹ | Countertop | SensorSAFE | 25.00 (63.5) | 28.25 (71.8) | 34.75 (88.3) | N/A | N/A | 115/60/1 | 138 (63) | \$7,835 |
| 110CM-NI-L ¹ | Countertop | Lever | 25.00 (63.5) | 28.25 (71.8) | 34.75 (88.3) | N/A | N/A | 115/60/1 | 138 (63) | \$7,835 |

¹ Manual fill configuration, not equipped with ice machine.


Symphony Plus ice-only dispensers – 110 series

Countertop and freestanding ice dispensers with 90 lb (40.8 kg) of storage. Models equipped with integral ice machine produce up to 425 lb (193 kg) of ice per day. Stainless steel cabinet with accent trim. Water station not included. Choose appropriate item number for SensorSAFE infrared dispensing or lever dispensing, integral ice machine or manual fill and countertop or freestanding.


For additional product information, request form# 6655 for CT models, 6660 for CM models, or 6670 for FB models.



Countertop with top mounted removable ice machine



Freestanding with removable ice machine in base



Countertop, manual fill

110 series accessories

Caster kit for 110FB (item# AFCASTERKIT)..... **List price** \$630

See page 38 for additional accessory information.


| Item number | Configuration | Dispense | Width in (cm) | Depth in (cm) | Height in (cm) | Condenser | Ice machine location | Voltage | Approx. ship wt lb (kg) | List price |
|---------------------------------------|---------------|------------|---------------|---------------|----------------|------------|----------------------|----------|-------------------------|------------|
| 110 series ice-only dispensers | | | | | | | | | | |
| 110CT425A-SI | Countertop | SensorSAFE | 25.00 (63.5) | 29.00 (73.7) | 53.00 (134.6) | air-cooled | top mounted | 115/60/1 | 286 (130) | \$24,570 |
| 110CT425A-LI | Countertop | lever | 25.00 (63.5) | 29.00 (73.7) | 53.00 (134.6) | air-cooled | top mounted | 115/60/1 | 286 (130) | \$24,570 |
| 110FB425A-SI | Freestanding | SensorSAFE | 25.00 (63.5) | 28.25 (71.8) | 68.12 (173.0) | air-cooled | base mounted | 115/60/1 | 285 (129) | \$27,085 |
| 110FB425A-LI | Freestanding | lever | 25.00 (63.5) | 28.25 (71.8) | 68.12 (173.0) | air-cooled | base mounted | 115/60/1 | 285 (129) | \$27,085 |
| 110CM-NI-SI ¹ | Countertop | SensorSAFE | 25.00 (63.5) | 28.25 (71.8) | 34.75 (88.3) | N/A | N/A | 115/60/1 | 138 (63) | \$7,835 |
| 110CM-NI-LI ¹ | Countertop | lever | 25.00 (63.5) | 28.25 (71.8) | 34.75 (88.3) | N/A | N/A | 115/60/1 | 138 (63) | \$7,835 |

¹ Manual fill configuration, not equipped with ice machine.


Symphony Plus base stand options

Stainless steel base stand transforms Follett® countertop dispensers into freestanding dispensers. All bases include stainless steel exterior, and stainless legs with 6.00" (15.24 cm) adjustable flanged feet. Available with or without factory installed water filter system.

For additional product information, request form# 7010.



12 Series



25, 50, 110 Series

| Item number | Description | Approx. ship wt lb (kg) | List price |
|----------------|--|-------------------------|------------|
| 12BASE-00 | Base for 12 CI Series, 17.50" (44.4 cm) W x 22.00" (55.9 cm) D x 33.00" (83.8 cm) H | 74 (34) | \$1,900 |
| 12BASE-CF | 12BASE-00 with standard capacity carbon filter system (00130229) installed | 86 (39) | \$3,045 |
| 12BASE-HC | 12BASE-00 with high capacity carbon filter system (00978957) installed | 86 (39) | \$3,265 |
| 12BASE-CL | 12BASE-00 with carbonless high capacity filter system (01050442) installed | 86 (39) | \$3,125 |
| 25AND50BASE-00 | Base for 25 and 50 CI series, 22.75" (57.8 cm) W x 24.38" (61.9 cm) D x 33.00" | 78 (35) | \$1,975 |
| 25AND50BASE-CF | 25AND50BASE-00 with standard capacity carbon filter system (00130229) installed | 95 (43) | \$3,125 |
| 25AND50BASE-HC | 25AND50BASE-00 with high capacity carbon filter system (00978957) installed | 95 (43) | \$3,365 |
| 25AND50BASE-CL | 25AND50BASE-00 with carbonless high capacity filter system (01050442) installed | 95 (43) | \$3,215 |
| 110BASE-00 | Base for 110 CT series, 26.00" (66.0 cm) W x 29.00" (73.7 cm) D x 33.00" (83.8 cm) H | 96 (44) | \$3,160 |
| 110BASE-CF | 110BASE-00 with standard capacity carbon filter system (00130229) installed | 107 (49) | \$4,305 |
| 110BASE-HC | 110BASE-00 with high capacity carbon filter system (00978957) installed | 107 (49) | \$4,545 |
| 110BASE-CL | 110BASE-00 with carbonless high capacity filter system (01050442) installed | 107 (49) | \$4,435 |

Ice and water dispenser accessories

Water treatment accessories for Symphony Plus ice and water dispensers

| Item number | Description | List price |
|--|--|------------|
| Follett bacterial-retentive filter system | | |
| 01233659 | Bacterial-retentive filter system | \$1,150 |
| 01244615 | Replacement filter kit for bacterial-retentive filter system | \$480 |
| 01233717 | 1 micron absolute rated pre-filter cartridge | \$110 |
| 01288034 | Scale inhibitor pre-filter kit for bacterial-retentive filter system | \$400 |
| 01288042 | Carbon with scale inhibitor pre-filter kit for bacterial-retentive filter system | \$400 |
| 01288067 | Replacement filter for scale inhibitor pre-filter kit | \$160 |
| 01288059 | Replacement filter for carbon and scale inhibitor pre-filter kit | \$160 |
| Carbonless high capacity filter system | | |
| 01050442 | Carbonless high capacity water filter system (one per ice machine) | \$1,160 |
| 01050426 | Carbonless high capacity water filter cartridge – primary, single | \$280 |
| 01050434 | Carbonless high capacity water filter cartridge – primary, carton of 6 | \$1,340 |
| 00130211 | Water pre-filter cartridge – pre-filter, single | \$100 |
| 00954305 | Water pre-filter cartridge – pre-filter, carton of 12 | \$390 |
| Standard capacity carbon filter system | | |
| 00130229 | Water filter system (one per ice machine) | \$1,090 |
| 00130245 | Water filter cartridge – primary, single | \$250 |
| 00954297 | Water filter cartridge – primary, carton of 6 | \$1,140 |
| 00130211 | Water pre-filter cartridge – pre-filter, single | \$100 |
| 00954305 | Water pre-filter cartridge – pre-filter, carton of 12 | \$390 |
| High capacity carbon filter system | | |
| 00978957 | High capacity water filter system (one per ice machine) | \$1,300 |
| 00978965 | High capacity water filter cartridge – primary, single | \$450 |
| 00978973 | High capacity water filter cartridge – primary, carton of 6 | \$2,200 |
| 00130211 | Water pre-filter cartridge – pre-filter, single | \$100 |
| 00954305 | Water pre-filter cartridge – pre-filter, carton of 12 | \$390 |

Cleaning and sanitizing accessories for Symphony Plus ice and water dispensers

| Item number | Description | List price |
|-------------|---|------------|
| 01089572 | Pressurized water sanitizing kit for use with Follett dispensers that have a Follett water filtration system ¹ (includes dip tube and bypass plug) | \$120 |
| 01089580 | Pressurized water sanitizing kit for use with Follett dispensers that do not have a Follett water filtration system (includes filter housing, dip tube and bypass plug) | \$240 |
| 01147826 | SafeCLEAN Plus™, liquid – environmentally responsible ice machine cleaner (1 x 8 oz bottle) | \$70 |
| 01149954 | SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (6 x 8 oz bottles) | \$170 |
| 01149962 | SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (carton of 24 x 8 oz bottles) | \$510 |
| 00979674 | Nu-Calgon® IMS-III sanitizer, single 16 oz bottle | \$70 |
| 01038652 | Nu-Calgon IMS-III sanitizer, case of 12 x 16 oz bottles | \$380 |
| 01075431 | SaniSponge™, 24 pack of sanitary sponges | \$120 |

¹ Applicable Follett water filter systems include 00130229, 00978957, 01050442

Other accessories for Symphony Plus ice and water dispensers

| Item number | Description | List price |
|-------------|--|------------|
| 01049790 | Symphony Plus external drain kit (includes 10 ft (3 m) clear tubing and fitting) | \$130 |
| AFCONDPUMP | Condensate pump | \$570 |

Replacement ice machine for use in existing Symphony and Symphony Plus dispensers

| Item number | Width in (cm) | Depth in (cm) | Height in (cm) | Production per 24 hr lb (kg) | Condenser | Voltage | Ship wt lb (kg) | List price |
|-------------|---------------|---------------|----------------|------------------------------|--------------|----------|-----------------|------------|
| R425A | 18.84 (47.9) | 20.00 (50.8) | 17.00 (43.2) | 400 (181) | air-cooled | 115/60/1 | 127 (58) | \$11,025 |
| R425W | 18.84 (47.9) | 22.06 (56.0) | 17.00 (43.2) | 400 (181) | water-cooled | 115/60/1 | 127 (58) | \$11,025 |
| P425A | 15.30 (38.9) | 19.90 (50.5) | 16.80 (42.7) | 425 (193) | air-cooled | 115/60/1 | 117 (53) | \$10,510 |
| CP425A | 15.30 (38.9) | 19.90 (50.5) | 16.80 (42.7) | 425 (193) | air-cooled | 220/60/1 | 117 (53) | \$10,715 |
| P425W | 15.30 (38.9) | 19.90 (50.5) | 16.80 (42.7) | 425 (193) | water-cooled | 115/60/1 | 122 (55) | \$10,510 |
| CP425W | 15.30 (38.9) | 19.90 (50.5) | 16.80 (42.7) | 425 (193) | water-cooled | 220/60/1 | 122 (55) | \$10,715 |

Refer to matrix below for correct replacement ice machine.

Replacement ice machine ordering matrix

| Dispenser series | Replacement ice machine item number | Ice machine panel finish |
|--|-------------------------------------|--------------------------|
| Countertop and wall mount dispensers with top mounted ice machines | | |
| 25CT400A, 25HT400A, 50CT400A, 50HT400A | P425A | no panels |
| 25CT400W, 25HT400W, 50CT400W, 50HT400W | P425W | no panels |
| 110CT400A | P425A | no panels |
| 110CT425A | P425A | no panels |
| 110CT400W | P425W | no panels |
| 110CT425W | P425W | no panels |
| Countertop and wall mount dispensers with ice machine behind front splash panel | | |
| 25CI400A, 50CI400A, 25HI400A, 50HI400A | P425A | no panels |
| 25CI400W, 50CI400W | P425W | no panels |
| 25CI425A, 50CI425A, 25HI425A, 50HI425A | P425A | no panels |
| 25CI425W, 50CI425W | P425W | no panels |
| Countertop and wall mount dispensers with RIDE model ice machines | | |
| C25R5A, H25R5A, C50R5A, H50R5A | R425A | stainless |
| C25R5W, H25R5W, C50R5W, H50R5W | R425W | stainless |
| 25CR400A, 25HR400A, 50CR400A, 50HR400A | R425A | stainless |
| 25CR400W, 25HR400W, 50CR400W, 50HR400W | R425W | stainless |
| 25CR425A, 25HR425A, 50CR425A, 50HR425A | R425A | stainless |
| 25CR425W, 25HR425W, 50CR425W, 50HR425W | R425W | stainless |
| C110R5A | R425A | stainless |
| C110R5W | R425W | stainless |
| 110CR400A | R425A | stainless |
| 110CR400W | R425W | stainless |
| 110CR425A | R425A | stainless |
| 110CR425W | R425W | stainless |
| Freestanding dispensers with ice machine in base | | |
| 25FB400A, 50FB400A | P425A | no panels |
| 25FB400W, 50FB400W | P425W | no panels |
| 25FB425A, 50FB425A | P425A | no panels |
| 25FB425W, 50FB425W | P425W | no panels |
| 110FB400A | P425A | no panels |
| 110FB400W | P425W | no panels |
| 110FB425A | P425A | no panels |
| 110FB425W | P425W | no panels |

Ice machines

Compact, reliable Chewblet® extruded ice and flake ice machines in a variety of sizes to meet your needs. Choose from top mount or RIDE model configurations (extruded only).

Warranty

Maestro Plus™ and Horizon Elite™ series ice machines

Follett Products, LLC warrants to the original end user that all parts shall be free from defects in material and workmanship under normal use and service for a period of 3 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 3 year period are covered under this warranty. For products sold outside of the U.S., the labor warranty will apply only to equipment sold and serviced through a Follett Authorized Distributor in its designated territory.

The compressor shall be covered for an additional 2 years (parts only), for a total of 5 years from the date of installation.

WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett.
- Customer has documented record of preventive maintenance and cleaning of the machine every 6 months according to the instructions in the dispenser Installation, Operations and Service Manual.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond the control of Follett are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective upon examination.
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.

This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship.

Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.


Maestro Plus ice machine bins – 400 series

Flake (UF) or Micro Chewblet™ (UM) ice machines with 75 lb (34 kg) of bin storage for undercounter or freestanding applications.

Ice machines use R290a refrigerant. Stainless steel exterior with moderate production and storage capacity in a small footprint.

For additional product information, request form# 1005 for UFD and UMD models or 1006 for UFE and UME models.

See page 49 for additional accessory information.



undercounter ice machine bin

| Item number | Width in (cm) | Depth in (cm) | Height ² in (cm) | Production capacity lb (kg) | | Condensing unit ³ | Voltage | Approx. ship wt lb (kg) | List price |
|------------------------|------------------|------------------|--------------------------------|-------------------------------------|-------------------------------------|---------------------------------|-----------------------|----------------------------|------------|
| | | | | 90 F air 70 F water (32/21 C) | 70 F air 50 F water (21/10 C) | | | | |
| UFD414A80 | 23.50 (59.7) | 26.00 (66.0) | 33.00 (83.8) | 325 (148) | 425 (193) | A – SC | 115/60/1 | 194 (88) | \$12,965 |
| UFE414A80 ¹ | 23.50 (59.7) | 26.00 (66.0) | 33.00 (83.8) | 325 (148) | 425 (193) | A – SC | 230/50/1 ¹ | 194 (88) | \$13,180 |
| UMD414A80 ¹ | 23.50 (59.7) | 26.00 (66.0) | 33.00 (83.8) | 325 (148) | 425 (193) | A – SC | 115/60/1 | 194 (88) | \$12,965 |
| UME414A80 ¹ | 23.50 (59.7) | 26.00 (66.0) | 33.00 (83.8) | 325 (148) | 425 (193) | A – SC | 230/50/1 ¹ | 194 (88) | \$13,180 |

[†] ENERGY STAR® certified.

¹ Models not for use in the United States.

² 33.00" (83.8 cm) with leveling feet for undercounter use. 39.00" (99.1 cm) with bullet legs for freestanding application.

³ Condensing unit: A – SC = Air – self-contained

Maestro Plus Model Number Configurations

Example: MCD425ABT

| MC | D | 4 | 25 | A | B | T |
|---|---|--------------------------|-----------------------------------|--|---|---|
| Ice Type | Voltage | Ice Production (approx.) | Refrigerant Type | Condenser | Application | Configuration |
| MC Maestro Plus Chewblet (414/425) | C 220/60/1 (icemaking head) <i>Self-contained only.</i> | 4 400 lb (181 kg) | 14 R290 25 R404a | A Air-cooled, self-contained W Water-cooled, self-contained | H Harmony™ (countertop ice and beverage dispenser) B Ice storage bin | S RIDE™ (RIDE remote ice delivery equipment) T Top-mount |
| MF Maestro Plus Flake (414/425) | D 115/60/1 (icemaking head) <i>Self-contained only.</i> | 7 700 lb (318 kg) | 10 R404a | | | |
| HC Horizon Elite Chewblet (710) | E 230/50/1 (icemaking head) <i>Self-contained only.</i> | | | | | |
| HM Horizon Elite Micro Chewblet† (710) | | | | | | |

† Micro Chewblet™ – For smaller Chewblet ice (approximately 3/8" long), replace second character of Horizon Elite model number with "M". Example HCD710ABS becomes HMD710ABS. Add \$235 to list price.

Maestro Plus flake ice machines for ice storage bins – 400 series

Flake ice machines for top mount on ice storage bins.

MFD425 and MFC425 models use R404a refrigerant. MFE414 models use R290a refrigerant. MFC425 and MFE414 models are not for use in the United States.

For additional product information, request form# 7015 for MFD425 models, 6950 or 6955 for MFC425 models, or 1003 for MFE414 models.

See page 49 for additional accessory information.



Top mount

| Item number | Configuration | Width in (cm) | Depth in (cm) | Height in (cm) | Production capacity lb (kg) | | Condensing unit ¹ | Voltage | Approx. ship wt lb (kg) | List price |
|------------------------|---------------|---------------|---------------|----------------|-------------------------------|-------------------------------|------------------------------|----------|-------------------------|------------|
| | | | | | 90 F air 70 F water (32/21 C) | 70 F air 50 F water (21/10 C) | | | | |
| 425 series | | | | | | | | | | |
| MFD425ABT | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 325 (148) | 425 (193) | A – SC | 115/60/1 | 170 (77) | \$10,890 |
| MFC425ABT ² | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 325 (148) | 425 (193) | A – SC | 220/60/1 | 170 (77) | \$11,095 |
| MFD425WBT | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 408 (185) | 486 (221) | W – SC | 115/60/1 | 170 (77) | \$10,890 |
| MFC425WBT ² | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 408 (185) | 486 (221) | W – SC | 220/60/1 | 170 (77) | \$11,095 |
| 414 series | | | | | | | | | | |
| MFE414ABT ² | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 325 (148) | 425 (193) | A – SC | 230/50/1 | 170 (77) | \$11,095 |

¹ Condensing unit: A – SC = Air – self-contained W – SC = Water – self-contained

² Models not for use in the United States.

Maestro Plus Chewblet ice machines for ice storage bins – 400 series

Ice machines for top mount or RIDE (ice-through-a-tube) configurations.

MCD425 and MCC425 models use R404a refrigerant. MCE414 and MME414 models use R290a refrigerant. MCC425 and MCE414 models are not for use in the United States.

RIDE ice machines include 10' (3 m) of insulated ice transport tube. Factory approval required for lengths over 20' (6.1 m).

For additional product information, request form# 6690 or 6695 for MCD models or 1001, 1002 or 1003 for MCE and MCC models.

Refer to page 50 of the price list for capacities and sizes of bins available.

See page 49 for additional accessory information.



Top mount



RIDE model

| Item number | Configuration | Width in (cm) | Depth in (cm) | Height in (cm) | Production capacity lb (kg) | | Condensing unit ¹ | Voltage | Approx. ship wt lb (kg) | List price |
|--------------------------|---------------|---------------|---------------|----------------|-------------------------------------|-------------------------------------|------------------------------|-----------------------|-------------------------|------------|
| | | | | | 90 F air 70 F water (32/21 C) | 70 F air 50 F water (21/10 C) | | | | |
| 425 series | | | | | | | | | | |
| MCD425ABT [†] | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 325 (148) | 425 (193) | A – SC | 115/60/1 | 170 (77) | \$10,890 |
| MCD425ABS [†] | RIDE | 18.80 (47.8) | 22.75 (57.8) | 17.10 (43.4) | 325 (148) | 425 (193) | A – SC | 115/60/1 | 170 (77) | \$11,715 |
| MCC425ABT ² | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 325 (148) | 425 (193) | A – SC | 220/60/1 ² | 170 (77) | \$11,095 |
| MCC425ABS ² | RIDE | 18.80 (47.8) | 22.75 (57.8) | 17.10 (43.4) | 325 (148) | 425 (193) | A – SC | 220/60/1 ² | 170 (77) | \$11,925 |
| MMC425ABT ^{2,3} | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 325 (148) | 425 (193) | A – SC | 220/60/1 ² | 170 (77) | \$11,330 |
| MMC425ABS ^{2,3} | RIDE | 18.80 (47.8) | 22.75 (57.8) | 17.10 (43.4) | 325 (148) | 425 (193) | A – SC | 220/60/1 ² | 170 (77) | \$12,160 |
| MCD425WBT | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 408 (185) | 486 (221) | W – SC | 115/60/1 | 170 (77) | \$10,890 |
| MCD425WBS | RIDE | 18.80 (47.8) | 20.75 (52.7) | 17.10 (43.4) | 408 (185) | 486 (221) | W – SC | 115/60/1 | 170 (77) | \$11,715 |
| MCC425WBT ² | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 408 (185) | 486 (221) | W – SC | 220/60/1 ² | 170 (77) | \$11,095 |
| MCC425WBS ² | RIDE | 18.80 (47.8) | 20.75 (52.7) | 17.10 (43.4) | 408 (185) | 486 (221) | W – SC | 220/60/1 ² | 170 (77) | \$11,925 |
| MMC425WBT ^{2,3} | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 408 (185) | 486 (221) | W – SC | 220/60/1 ² | 170 (77) | \$11,330 |
| MMC425WBS ^{2,3} | RIDE | 18.80 (47.8) | 20.75 (52.7) | 17.10 (43.4) | 408 (185) | 486 (221) | W – SC | 220/60/1 ² | 170 (77) | \$12,160 |
| 414 series | | | | | | | | | | |
| MCE414ABT ² | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 325 (148) | 425 (193) | A – SC | 230/50/1 ² | 170 (77) | \$11,095 |
| MCE414ABS ² | RIDE | 18.80 (47.8) | 22.75 (57.8) | 17.10 (43.4) | 325 (148) | 425 (193) | A – SC | 230/50/1 ² | 170 (77) | \$11,925 |
| MME414ABT ^{2,3} | Top mount | 22.70 (57.7) | 24.25 (61.6) | 21.25 (54.0) | 325 (148) | 425 (193) | A – SC | 230/50/1 ² | 170 (77) | \$11,330 |

[†] ENERGY STAR[®] certified.

¹ Condensing unit: A – SC = Air – self-contained W – SC = Water – self-contained

² Models not for use in the United States.

³ Produces Micro Chewblet ice approximately 3/8" long.

Maestro Plus Chewblet ice machines for countertop ice and beverage dispensers – 400 series

Ice machines for top mount or RIDE (ice-through-a-tube) configurations.

MCD425 and MCC425 models use R404a refrigerant. MCE414 models use R290a refrigerant. MCC425 and MCE414 models are not for use in the United States.


Top mount ice machine **requires stainless steel top kit**, sold separately. See top kit charts on page 45 for top kit numbers.

RIDE ice machines include 10' (3 m) of insulated ice transport tube and universal RIDE model adapter kit (item# 01054444). Factory approval required for ice transport tube lengths over 20' (6.1 m). See page 45 for approved dispensers.

All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required.

For additional product information, request form# 7015 for MCD425 models, 6945, 6950 or 6955 for MCC425 models, or 1001, 1002 or 1003 for MCE414 models.

See page 49 for additional accessory information.

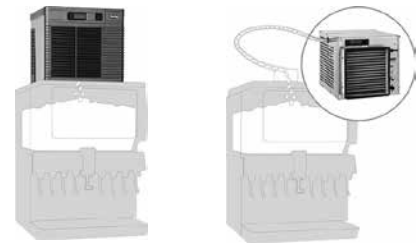

Top mount

RIDE model

| Item number | Configuration | Width in (cm) | Depth in (cm) | Height in (cm) | Production capacity lb (kg) | | Condensing unit ¹ | Voltage | Approx. ship wt lb (kg) | List price |
|------------------------|---------------|---------------|---------------|----------------|-------------------------------------|-------------------------------------|------------------------------|-----------------------|-------------------------|------------|
| | | | | | 90 F air 70 F water (32/21 C) | 70 F air 50 F water (21/10 C) | | | | |
| 425 series | | | | | | | | | | |
| MCD425AHT [†] | Top mount | 22.70 (57.7) | 22.25 (61.6) | 21.25 (54.0) | 325 (148) | 425 (193) | A – SC | 115/60/1 | 170 (77) | \$10,890 |
| MCD425AHS [†] | RIDE | 18.80 (47.8) | 22.75 (57.8) | 17.10 (43.4) | 325 (148) | 425 (193) | A – SC | 115/60/1 | 170 (77) | \$11,715 |
| MCC425AHT ² | Top mount | 22.70 (57.7) | 22.25 (61.6) | 21.25 (54.0) | 325 (148) | 425 (193) | A – SC | 220/60/1 ² | 170 (77) | \$11,095 |
| MCC425AHS ² | RIDE | 18.80 (47.8) | 22.75 (57.8) | 17.10 (43.4) | 325 (148) | 425 (193) | A – SC | 220/60/1 ² | 170 (77) | \$11,925 |
| MCD425WHT | Top mount | 22.70 (57.7) | 22.25 (61.6) | 21.25 (54.0) | 408 (185) | 486 (221) | W – SC | 115/60/1 | 170 (77) | \$10,890 |
| MCD425WHS | RIDE | 18.80 (47.8) | 22.75 (57.8) | 17.10 (43.4) | 408 (185) | 486 (221) | W – SC | 115/60/1 | 170 (77) | \$11,715 |
| 414 series | | | | | | | | | | |
| MCE414AHT ² | Top mount | 22.70 (57.7) | 22.25 (61.6) | 21.25 (54.0) | 325 (148) | 425 (193) | A – SC | 230/50/1 ² | 170 (77) | \$11,095 |
| MCE414AHS ² | RIDE | 18.80 (47.8) | 22.75 (57.8) | 17.10 (43.4) | 325 (148) | 425 (193) | A – SC | 230/50/1 ² | 170 (77) | \$11,925 |

[†] ENERGY STAR[®] certified.

¹ Condensing unit: A – SC = Air – self-contained W – SC = Water – self-contained.

² Models not for use in the United States.

Approved for RIDE model – ice and beverage dispensers manufactured by others¹

| | | |
|---|--|----------------|
| Coca-Cola Freestyle 7000 ^{2,4} / 7100 ^{3,4} / 9000 ⁴ / 9100 ⁴ | Lancer 4500-22N | Servend MD175 |
| Cornelius DB/DF/ED150BC Series | Lancer 4500-30N | Servend MD200 |
| Cornelius DB/DF/ED175BC Series | Lancer FS-16N | Servend MD250 |
| Cornelius DB/DF/ED200BC Series | Lancer FS-22N | Servend MDH302 |
| Cornelius DB/DF/ED250BC Series | Lancer FS-30N | Servend MDH402 |
| Cornelius DB/DF/ED300BC Series | Lancer FS-44N | Servend SV175 |
| Cornelius IDC215/255 and Pro Fast Gate | Lancer Sensation and TouchPoint | Servend SV200 |
| Cornelius IDC Pro | Pepsi Spire 3.0 ⁵ / 5.0 ⁵ / 4.1 ⁵ | Servend SV250 |
| Cornelius Flavor Fusion/Overload | Servend MD150 | |

Top kits for top mount model Maestro Plus 400 series ice machines used with countertop ice and beverage dispensers

| Top kit accessory item number | Ice machine model | Dispenser | Dispenser model number | Dispenser series width | List price | Specification sheet form number |
|--|-------------------|-----------|------------------------|------------------------|------------|---------------------------------|
| Maestro Plus top mount applications¹ | | | | | | |
| MTF24SCP ^{4,6} | MCD425AHT | Coca-Cola | Freestyle 9000 | 24" | \$940 | 6690 |
| MTF26SCP ⁴ | MCD425AHT | Coca-Cola | Freestyle 9100 | 26" | \$940 | 6690 |
| MTF30SCP ^{4,7} | MCD425AHT | Coca-Cola | Freestyle 7000 | 30" | \$1,140 | 6690 |
| MTF30SCP ^{4,8} | MCD425AHT | Coca-Cola | Freestyle 7100 | 30" | \$1,140 | 6690 |
| MTC22SCP | MCD425AHT | Cornelius | DB/DF/ED150BC | 22" | \$935 | 6690 |
| MTC24SCP | MCD425AHT | Cornelius | DB/DF/ED175BC | 24" | \$935 | 6690 |
| MTC30SCP | MCD425AHT | Cornelius | DB/DF/ED200/250 | 30" | \$1,140 | 6690 |
| MTL22SCP | MCD425AHT | Lancer | FS-22N/4500-22N | 22" | \$925 | 6690 |
| MTL30SCP | MCD425AHT | Lancer | 4500-30N | 30" | \$1,140 | 6690 |
| MTL30SCP-STP | MCD425AHT | Lancer | Sensation/TouchPoint | 30" | \$1,140 | 6690 |
| MTP24SCP | MCD425AHT | Pepsi | Spire 3.0 | 24" | \$935 | 6690 |
| MTP30SCP | MCD425AHT | Pepsi | Spire 5.0 / 4.1 | 30" | \$1,140 | 6690 |

Top kits for RIDE model Maestro Plus and Horizon Elite series ice machines for use with countertop ice and beverage dispensers

| Top kit accessory item number | Ice machine model | Dispenser | Dispenser model number | Dispenser series width | List price |
|---|--|-----------|------------------------|------------------------|------------|
| Required Maestro Plus series RIDE model stainless steel adapter kits¹ | | | | | |
| MSF30SC ^{2,4} | Available for all models that end in HS. | Coca-Cola | Freestyle 7000 | 30" | \$560 |
| MSF26SC ⁴ | | Coca-Cola | Freestyle 9100 | 26" | \$530 |
| MSP24SC ⁵ | Example: MCD425AHS MCE414AHS | Pepsi | Spire 3.0 | 24" | \$530 |
| MSP30SC ⁵ | | Pepsi | Spire 5.0 / 4.1 | 30" | \$560 |

Optional Maestro Plus and Horizon Elite series RIDE model stainless steel adapter kits¹

| | | | | | |
|---------|--|-----------|---------------|-----|---------|
| MSC22SC | Available for all models that end in HS. | Cornelius | DB/DF/ED150BC | 22" | \$2,260 |
| MSC24SC | | Cornelius | DB/DF/ED175BC | 24" | \$2,365 |
| MSC30SC | | Cornelius | DB/DF/ED200BC | 30" | \$2,470 |
| MSC30SC | | Cornelius | DB/DF/ED250BC | 30" | \$2,470 |
| MSC44SC | | Cornelius | DB/DF/ED300BC | 44" | \$2,520 |
| MSL22SC | Example: MCE414AHS HCD710AHS | Lancer | FS-22N | 22" | \$2,260 |
| MSL30SC | | Lancer | 4500-30N | 30" | \$2,470 |
| MSL30SC | | Lancer | FS-30N | 30" | \$2,470 |

¹ All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required. Approved dispensers for top mount ice machine applications are listed above.

² Top kit MSF30SC required with Coca-Cola Freestyle 7000. Top adapter IC Code 46412 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

³ Top kit MSF30SC required with Coca-Cola Freestyle 7100. Top adapter IC Code 46751 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁴ Consult with Coca-Cola and Follett to qualify application prior to ordering.

⁵ RIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

⁶ Adapter must also be ordered from Coca-Cola. IC Code: 46010 (Silver), 46011 (Red) or 46012 (Black).

⁷ Top adapter IC Code 46412 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁸ Top adapter IC Code 46753 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

Horizon Elite Chewblet ice machines for ice storage bins – 710 series

Ice machines for top mount or RIDE (ice-through-a-tube) configurations.


RIDE ice machines include 10' (3 m) of insulated ice transport tube. For additional tube lengths, see page 47. Maximum run length of ice transport tube is 75' (22.9 m).

Micro Chewblet ice – For smaller Chewblet ice (approximately 3/8" long), replace second character of Horizon Elite number with "M". Example HCD710ABT becomes HMD710ABT. Add \$235 to list price.

For additional product information, request form# 8225.

Refer to page 51 of the price list for capacities and sizes of bins available.

See page 49 for additional accessory information.

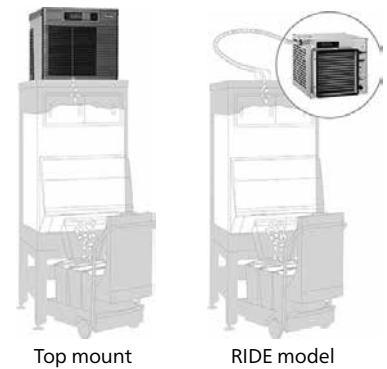

| Item number | Configuration | Width in (cm) | Depth in (cm) | Height in (cm) | Production capacity lb (kg) | | Condensing unit ¹ | Voltage | Approx. ship wt lb (kg) | List price |
|------------------------|---------------|---------------|---------------|----------------|-------------------------------|-------------------------------|------------------------------|-----------------------|-------------------------|------------|
| | | | | | 90 F air 70 F water (32/21 C) | 70 F air 50 F water (21/10 C) | | | | |
| 710 series | | | | | | | | | | |
| HCD710ABT [†] | Top mount | 22.70 (57.7) | 24.50 (62.2) | 21.25 (54.0) | 586 (266) | 759 (345) | A – SC | 115/60/1 | 190 (87) | \$14,915 |
| HCD710ABS [†] | RIDE | 22.70 (57.7) | 24.50(62.2) | 21.25 (54.0) | 586 (266) | 759 (345) | A – SC | 115/60/1 | 190 (87) | \$15,740 |
| HCE710ABT ² | Top mount | 22.70 (57.7) | 24.50 (62.2) | 21.25 (54.0) | 586 (266) | 759 (345) | A – SC | 230/50/1 ² | 190 (87) | \$15,120 |
| HCE710ABS ² | RIDE | 22.70 (57.7) | 24.50 (62.2) | 21.25 (54.0) | 586 (266) | 759 (345) | A – SC | 230/50/1 ² | 190 (87) | \$15,950 |

[†] ENERGY STAR[®] certified.

¹ Condensing unit: A – SC = Air – self-contained

² Models not for use in the United States.

Horizon Elite Chewblet ice machines for countertop ice and beverage dispensers – 710 series

Top mount ice machines **require stainless steel top kit**, sold separately. See top kit charts on page 47.


RIDE ice machines that automatically fill countertop ice and beverage dispensers, **no stainless steel top required***. All parts required for installation are included with the ice machine. Refer to specification sheet, form# 8225, for approved applications. See page 48 for approved dispensers.

RIDE rice machines include 10' (3 m) of insulated ice transport tube. For additional tube lengths, see page 47. Maximum run length of ice transport tube is 75' (22.9 m).

All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required.

Micro Chewblet ice – For smaller Chewblet ice (approximately 3/8" long), replace second character of Horizon Elite number with "M". Example HCD710AHT becomes HMD710AHT. Add \$235 to list price.

For additional product information, request form# 8225

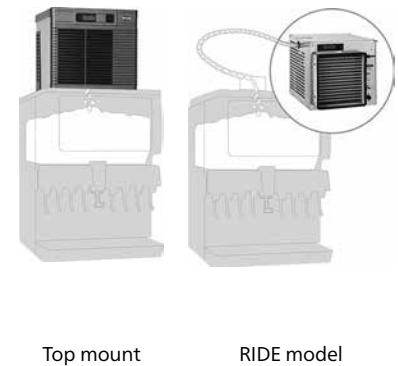

| | List price |
|--|------------|
| Accessory for models ending in HS and HT Sleep cycle kit for improved energy efficiency and component life..... | \$210 |

See page 49 for additional accessory information.

| Item number | Configuration | Width in (cm) | Depth in (cm) | Height in (cm) | Production capacity lb (kg) | | Condensing unit ¹ | Voltage | Approx. ship wt lb (kg) | List price |
|------------------------|---------------|---------------|---------------|----------------|-------------------------------|-------------------------------|------------------------------|-----------------------|-------------------------|------------|
| | | | | | 90 F air 70 F water (32/21 C) | 70 F air 50 F water (21/10 C) | | | | |
| 710 series | | | | | | | | | | |
| HCD710AHT [†] | Top mount | 22.70 (57.7) | 24.50 (62.2) | 21.25 (54.0) | 586 (266) | 759 (345) | A – SC | 115/60/1 | 190 (87) | \$14,915 |
| HCD710AHS [†] | RIDE | 22.70 (57.7) | 24.50 (62.2) | 21.25 (54.0) | 586 (266) | 759 (345) | A – SC | 115/60/1 | 190 (87) | \$15,740 |
| HCE710AHT ² | Top mount | 22.70 (57.7) | 24.50 (62.2) | 21.25 (54.0) | 586 (266) | 759 (345) | A – SC | 230/50/1 ² | 190 (87) | \$15,120 |
| HCE710AHS ² | RIDE | 22.70 (57.7) | 24.50 (62.2) | 21.25 (54.0) | 586 (266) | 759 (345) | A – SC | 230/50/1 ² | 190 (87) | \$15,950 |

[†] ENERGY STAR[®] certified.

* Coca-Cola Freestyle and Pepsi Spire 3.0 and 5.0 require top kit, see "Top kits for Horizon Elite 710 series ice machines for use with countertop ice and beverage dispensers" on page 48.

¹ Condensing unit: A – SC = Air – self-contained

² Models not for use in the United States.

Approved for RIDE model – ice and beverage dispensers manufactured by others¹

| | | | |
|---|------------------------------|--|---------------|
| Coca-Cola Freestyle 7000 ² / 7100 ^{2,3} / 9000 ² / 9100 ² | Follett Symphony Plus™ 110CM | Pepsi Spire 3.0 ⁴ / 5.0 ⁴ / 4.1 ⁴ | Servend SV250 |
| Cornelius DB/DF/ED150BC Series | Lancer 4500-22N | Servend MD150 | |
| Cornelius DB/DF/ED175BC Series | Lancer 4500-30N | Servend MD175 | |
| Cornelius DB/DF/ED200BC Series | Lancer FS-16N | Servend MD200 | |
| Cornelius DB/DF/ED250BC Series | Lancer FS-22N | Servend MD250 | |
| Cornelius DB/DF/ED300BC Series | Lancer FS-30N | Servend MDH302 | |
| Cornelius IDC215/255 and Pro Fast Gate | Lancer FS-44N | Servend MDH402 | |
| Cornelius IDC Pro | Lancer Sensation/TouchPoint | Servend SV175 | |
| Cornelius Flavor Fusion/Overload | Lancer Bevariety | Servend SV200 | |

¹ All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required. See table below for table of approved dispensers for top mount ice machines.

² Consult with Coca-Cola and Follett to qualify application prior to ordering.

³ Top kit MSF30SC required with Coca-Cola Freestyle 7100. Top adapter IC Code 46751 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁴ RIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

Top kits for Horizon Elite 710 RIDE ice machines for use with countertop ice and beverage dispensers

| Top kit accessory item number | Ice machine model | Dispenser | Dispenser model number | Dispenser series width | List price |
|--|--|-----------|------------------------|------------------------|------------|
| Required Horizon Elite series RIDE model stainless steel adapter kits¹ | | | | | |
| HSF26SC ² | Available for all models that end in HS. | Coca-Cola | Freestyle 9100 | 26" | \$560 |
| MSP24SC ³ | | Pepsi | Spire 3.0 | 24" | \$530 |
| MSP30SC ³ | Example: HCC1010AHS | Pepsi | Spire 5.0 | 30" | \$560 |

¹ All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required. See table below for table of approved dispensers for top mount ice machines.

² Consult with Coca-Cola and Follett to qualify application prior to ordering.

³ RIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

Ice transport tube

Insulated polywire transport tube for RIDE ice machine installations requiring more than the standard 10' (3 m) length.

| Item number | Description | List price |
|-------------|---|------------|
| 01252477 | Ice transport tube kit, 15 ft (4.6 m) | \$330 |
| 01252485 | Ice transport tube kit, 20 ft (6.1 m) | \$670 |
| 01252493 | Ice transport tube kit, 30 ft (9.2 m) | \$1,340 |
| 01252501 | Ice transport tube kit, 40 ft (12.2 m) | \$2,000 |
| 01252519 | Ice transport tube kit, 50 ft (15.3 m) | \$2,660 |
| 01252527 | Ice transport tube kit, 60 ft (18.3 m) | \$3,330 |
| 01413053 | Ice transport tube kit, 75 ft (22.9 m) | \$4,000 |
| 01252543 | Ice transport tube kit, 100 ft (30.5 m) | \$5,990 |

Top kits for Horizon Elite 710 series ice machines for use with countertop ice and beverage dispensers

| Top kit accessory item number | Ice machine model series | Dispenser manufacturer | Dispenser model number | Dispenser series width | Installation orientation – Front or Back ¹ | List price | Specification sheet form number |
|---|--------------------------|------------------------|-------------------------------|------------------------|---|------------|---------------------------------|
| Horizon top mount applications – 22 - 44 inch dispensers² | | | | | | | |
| H22F24-F ^{3,4} | 710A | Coca-Cola | Freestyle 9000 | 24" | F only | \$985 | 8225 |
| H22F26-F ³ | 710A | Coca-Cola | Freestyle 9100 | 26" | F only | \$985 | 8225 |
| H22F30-F ^{3,5} | 710A | Coca-Cola | Freestyle 7000 | 30" | F only | \$1,190 | 8225 |
| H22F30-F ^{3,7} | 710A | Coca-Cola | Freestyle 7100 | 30" | F only | \$1,190 | 8225 |
| H22C22-F | 710A | Cornelius | DB/DF/ED150 series | 22" | F only | \$970 | 8225 |
| H22C24-F | 710A | Cornelius | DB/DF/ED175 series | 24.5" | F only | \$985 | 8225 |
| H22C30-F | 710A | Cornelius | DB/DF/ED200 series | 30" | F only | \$1,190 | 8225 |
| H22C30-X ⁸ | 710A | Cornelius | DB/DF/ED200 series | 30" | F and B | \$1,110 | 8225 |
| H22C30-F | 710A | Cornelius | DB/DF/ED250 series | 30" | F only | \$1,190 | 8225 |
| H22C30-X ⁸ | 710A | Cornelius | DB/DF/ED250 series | 30" | F and B | \$1,110 | 8225 |
| H22C30-F-FF | 710A | Cornelius | Flavor Fusion/Overload | 30" | F only | \$1,580 | 8225 |
| H22C30-F-IDC | 710A | Cornelius | IDC 215/255 and Pro Fast Gate | 30" | F only | \$1,580 | 8225 |
| H22C30-X-PRO | 710A | Cornelius | IDC Pro | 30" | F and B | \$795 | 8225 |
| H22C44- _ | 710A | Cornelius | DB/DF/ED300 series | 44" | F or B | \$1,365 | 8225 |
| H22L22-F | 710A | Lancer | FS-22N | 22" | F only | \$970 | 8225 |
| H22L30-F | 710A | Lancer | 4500-30N | 30" | F only | \$1,190 | 8225 |
| H22L30-F | 710A | Lancer | FS-30N | 30" | F only | \$1,190 | 8225 |
| H22L30-F-STP | 710A | Lancer | Bevariety | 30" | F only | \$1,190 | 8225 |
| H22L30-F-STP | 710A | Lancer | 30" Sensation/Touchpoint | 30" | F only | \$1,190 | 8225 |
| H22L44-F-STP | 710A | Lancer | 44" Sensation | 44" | F only | \$1,190 | 8225 |
| H22P24-F ⁹ | 710A | Pepsi | Spire 3.0 | 24" | F only | \$985 | 8225 |
| H22P30-F ⁹ | 710A | Pepsi | Spire 5.0 / 4.1 | 30" | F only | \$1,190 | 8225 |
| H22S30-F | 710A | Servend | SV200 | 30" | F only | \$1,100 | 8225 |
| H22S44- _ | 710A | Servend | MDH-302 | 44" | F or B | \$1,365 | 8225 |
| H22S60- _ | 710A | Servend | MDH-402 | 60" | DF, DB | \$1,645 | 8225 |
| H22S60- _ | 710A | Servend | MDH-402 | 60" | RF, LF, RB, LB | \$1,190 | 8225 |

¹ Installation orientations available:

DF – 2 front facing Horizon Elite ice machines

LF – 1 Horizon Elite ice machine - left side - front facing

RB – 1 Horizon Elite ice machine - right side - back facing

RF – 1 Horizon Elite ice machine - right side - front facing

DB – 2 back facing Horizon Elite ice machines

LB – 1 Horizon Elite ice machine - left side - back facing

Note: For any other installation orientations, contact factory.

² All dispensers must be configured for nugget ice. See dispenser manufacturer for appropriate nugget ice kits, if required.

³ Consult with Coca-Cola and Follett to qualify application prior to ordering.

⁴ Adapter must also be ordered from Coca-Cola. IC Code: 46010 (Silver), 46011 (Red) or 46012 (Black).

⁵ Top adapter IC Code 46412 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁶ Top adapter IC Code 46753 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁷ Top adapter IC Code 46751 and ice kit IC Code 46430 must also be ordered from Coca-Cola.

⁸ Top designed with flexibility to accommodate front or back mounting.

⁹ RIDE application is approved only for Pepsi Spire 3.0, 5.0 and 4.1 designed for top mount ice machines and requires MSP24SC for 3.0 and MSP30SC for 5.0 and 4.1, ordered separately. For manual fill versions of Pepsi Spire 3.0, 5.0 and 4.1, contact factory.

Ice machine accessories

Water treatment accessories for ice machines

| Item number | Description | List price |
|--|--|------------|
| Follett bacterial-retentive filter system | | |
| 01233659 | Bacterial-retentive filter system | \$1,150 |
| 01244615 | Replacement filter kit for bacterial-retentive filter system | \$480 |
| 01233717 | 1 micron absolute rated pre-filter cartridge | \$110 |
| 01288034 | Scale inhibitor pre-filter kit for bacterial-retentive filter system | \$400 |
| 01288042 | Carbon with scale inhibitor pre-filter kit for bacterial-retentive filter system | \$400 |
| 01288067 | Replacement filter for scale inhibitor pre-filter kit | \$160 |
| 01288059 | Replacement filter for carbon and scale inhibitor pre-filter kit | \$160 |

Carbonless high capacity filter system

| | | |
|----------|---|---------|
| 01050442 | Carbonless high capacity water filter system (one per ice machine) – Horizon Elite and Maestro Plus series ice machines | \$1,160 |
| 01050426 | Carbonless high capacity water filter cartridge – primary, single | \$280 |
| 01050434 | Carbonless high capacity water filter cartridge – primary, carton of 6 | \$1,340 |
| 00130211 | Water pre-filter cartridge – pre-filter, single | \$100 |
| 00954305 | Water pre-filter cartridge – pre-filter, carton of 12 | \$390 |

Standard capacity carbon filter system

| | | |
|----------|--|---------|
| 00130229 | Water filter system (one per ice machine) – Maestro Plus series ice machines | \$1,090 |
| 00130245 | Water filter cartridge – primary, single | \$250 |
| 00954297 | Water filter cartridge – primary, carton of 6 | \$1,140 |
| 00130211 | Water pre-filter cartridge – pre-filter, single | \$100 |
| 00954305 | Water pre-filter cartridge – pre-filter, carton of 12 | \$390 |

High capacity carbon filter system

| | | |
|----------|---|---------|
| 00978957 | High capacity water filter system (one per ice machine) – Horizon Elite series ice machines | \$1,300 |
| 00978965 | High capacity water filter cartridge – primary, single | \$450 |
| 00978973 | High capacity water filter cartridge – primary, carton of 6 | \$2,200 |
| 00130211 | Water pre-filter cartridge – pre-filter, single | \$100 |
| 00954305 | Water pre-filter cartridge – pre-filter, carton of 12 | \$390 |

Cleaning and sanitizing accessories for ice machines

| Item number | Description | List price |
|-------------|--|------------|
| 01147826 | SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (1 x 8 oz bottle) | \$70 |
| 01149954 | SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (6 x 8 oz bottles) | \$170 |
| 01149962 | SafeCLEAN Plus, liquid – environmentally responsible ice machine cleaner (carton of 24 x 8 oz bottles) | \$510 |
| 00979674 | Nu-Calgon IMS-III sanitizer, single 16 oz bottle | \$70 |
| 01038652 | Nu-Calgon IMS-III sanitizer, case of 12 x 16 oz bottles | \$380 |

Other accessories for ice machines

| Item number | Description | List price |
|--------------|---|------------|
| 01068477 | Slide-out ice machine accessory for air- and water-cooled ice machines (Harmony applications only) – allows air- and water-cooled RIDE model Maestro Plus 425 series ice machine to slide-out without disconnecting utilities | \$1,410 |
| AFWALLMTBRKT | Wall mount bracket for Maestro Plus 425 series RIDE model ice machines | \$500 |
| 00997098 | Wall mount bracket for Horizon Elite 710 series RIDE model ice machines | \$670 |
| AFR400STND | Ice machine stand for Maestro Plus 425A/W series – height adjustable from 6.80" (17.27 cm) to 8.30" (21.08 cm) | \$1,040 |
| 00997080 | Ice machine stand for Horizon Elite 710 series – height adjustable from 6.80" (17.27 cm) to 8.30" (21.08 cm) | \$1,050 |

Ice storage, ice transport and ice handling

Follett offers ice storage, dispensing and transport solutions in capacities and sizes to meet nearly every need. All with features that can make your ice management easier, safer, and more sanitary than you ever thought possible. Please visit www.follettice.com for more bin models than listed here.

Warranty

Slope front bins

Follett Products, LLC warrants to the original end user that the cabinet exterior, including the top and trim, and the interior liner will be free of corrosion for 3 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for corrosion repair within this 3 year period are covered under this warranty.

All other integral components are covered against defects in material and workmanship under normal use and service for 2 years from the date of installation. Date of installation shall not exceed 90 days from date of shipment. Parts and labor for repair within this 2 year period are covered under this warranty. For products sold outside of the U.S., the labor warranty will apply only to equipment sold and serviced through a Follett Authorized Distributor in its designated territory.

Removal of ice machine to service bin and any labor costs incurred are expressly excluded from this warranty.

WARRANTY CONDITIONS

- Warranty labor must be performed by the local Follett authorized service provider.
- The equipment has been installed and operated in compliance with instructions provided by Follett. All 3rd party ice machines must be installed and operated in accordance with the manufacturer's instructions.
- Malfunctions or damage due to alterations, improper operation, outdoor use, neglect, vandalism, fire, acts of God, or any situation beyond Follett's control are expressly excluded from this warranty.
- Follett reserves the right to require that any parts covered under this warranty be returned to Follett prepaid and verified as defective upon examination.
- Any damages resulting from shipment of the unit are expressly excluded. Follett advises customers to carefully examine all shipments prior to acceptance and note all potential damage concerns on the appropriate shipping papers.
- Excess labor charges resulting from security clearance procedures, safety training, travel time greater than one hour or 50 miles (80 km), premium time labor; after hours, weekends, holidays, etc., will not be covered by Follett Products, LLC and are the responsibility of the equipment owner.


This warranty is expressly made in lieu of other warranties, expressed or implied, including any implied warranty of merchantability or fitness for a particular purpose except as provided in the warranty with respect to defects in material and workmanship.

Follett Products, LLC will not be liable for any consequential damages, expenses, connecting or disconnecting charges, or any losses or damages resulting from a defect of the machine. Questions concerning this warranty should be directed to Follett Products, LLC, technical service at +1 (877) 612-5086 or +1 (610) 252-7301.

Slope front bins

Small to medium capacity ice storage bins. Bin exterior for all models includes stainless steel front and sides. Bin interior includes polyethylene-lined walls and stainless steel bottom. All bins include stainless top, which is custom cut for ice machine(s) and 6.00" (15.24 cm) plastic adjustable legs.

For additional product information, request form# 9135.



Slope front bin

| Item number † | Max. bin cap. lb (kg) | Width in (cm) | Depth in (cm) | Height w/ legs in (cm) | Req'd door access in (cm) | Approx. ship wt lb (kg) | List price |
|---------------|--------------------------|------------------|------------------|---------------------------|------------------------------|----------------------------|------------|
| 425-30 | 430 (195) | 30.00 (76.2) | 31.50 (80.0) | 40.00 (101.6) | 31.00 (78.7) | 144 (65) | \$4,610 |
| 650-44 | 660 (299) | 44.00 (111.8) | 31.50 (80.0) | 40.00 (101.6) | 32.00 (81.2) | 178 (81) | \$6,375 |
| 950-48 | 950 (431) | 48.00 (121.9) | 31.50 (80.0) | 50.00 (127.0) | 32.00 (81.2) | 207 (94) | \$6,535 |
| 1025-52 | 1030 (467) | 52.00 (132.1) | 31.50 (80.0) | 50.00 (127.0) | 32.00 (81.2) | 217 (98) | \$6,715 |

† Purchase orders must clearly indicate the make and model of the ice machine(s) being used with the bin to properly prepare the bin top. Lack of this information will result in a delay in order processing.

Additional bin types available. Contact factory.

Replacement stainless steel tops for slope front bins

Order must include complete model number of ice machine to be used in conjunction with bin.

| Bin model | Width in (cm) | Depth (at top) in (cm) | Replacement top item number | Approx. ship wt lb (kg) | List price |
|-----------|------------------|---------------------------|--------------------------------|----------------------------|------------|
| 425-30 | 30.00 (76.2) | 27.50 (69.8) | AB425TOP00 | 36 (16) | \$1,150 |
| 650-44 | 44.00 (111.8) | 27.50 (69.8) | AB650TOP00 | 45 (20) | \$1,560 |
| 950-48 | 48.00 (121.9) | 27.50 (69.8) | AB725TOP00 | 70 (32) | \$1,710 |
| 1025-52 | 52.00 (132.1) | 27.50 (69.8) | AB750TOP00 | 72 (33) | \$1,820 |

Incoterms is a trademark of the International Chamber of Commerce.
ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency.
Pyxis is a registered trademark of CareFusion in the United States and other countries.
Omnicell is a registered trademark of Omnicell, Inc. in the United States.
medDISPENSE is a registered trademark of InterMetro Industries Corp. in the United States and other countries.
EDGE SERIES, HORIZON ELITE, INFINITY SERIES, MAESTRO PLUS, MICRO CHEWBLET, SAFECLEAN PLUS, SANISPONGE, SENSNORSAFE, and SYMPHONY PLUS are trademarks of Follett Products, LLC.
CHEWBLET, FOLLETT, FOLLETT HEALTHCARE and RIDE are registered trademarks of Follett Products, LLC, registered in the US.



801 Church Lane | Easton, PA 18040, USA
+1 610.252.7301 | 800.523.9361 | folletthealthcare.com

2155-20240402 | © Follett Products, LLC